

1N4001W THRU 1N4007W

SURFACE MOUNT GENERAL PURPOSE RECTIFIER

SOD-123FL Surface Mount General Purpose Rectifier

Features

- For surface mounted applications
- Low reverse leakage
- High forward surge current capability
- Glass passivated Standard rectifiers
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C

Reverse Voltage
50-1000 V
Forward Current
1 Ampere

Applications




For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer and telecommunication

Mechanical Data

- Case: SOD-123FL
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end

Function Diagram

SOD-123FL



Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	1N4001W	1N4002W	1N4003W	1N4004W	1N4005W	1N4006W	1N4007W
Device marking code			A1	A2	A3	A4	A5	A6	A7
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V	35	70	140	280	420	560	700
Maximum DC blocking Voltage	V_{DC}	V	50	100	200	400	600	800	1000
Maximum Average Forward Rectified Current @ 60Hz sinewave, Resistance load, TL (Fig.1)	$I_{F(AV)}$	A	1.0						
Non-repetitive Peak Forward Surge Current @ t=8.3ms Half-sine wave	I_{FSM}	A	30.0						
Storage temperature	T_{stg}	°C	-55 ~+150						
Junction temperature	T_j	°C	-55 ~+150						
Typical Thermal Resistance	$R_{\theta J-A}$	°C /W	85						
	$R_{\theta J-L}$	°C /W	35						





1N4001W THRU 1N4007W

SURFACE MOUNT GENERAL PURPOSE RECTIFIER

● **Electrical Characteristics** (Ta=25°C Unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	1N4001W	1N4002W	1N4003W	1N4004W	1N4005W	1N4006W	1N4007W
Maximum instantaneous forward voltage	$I_F=1.0A$	V_F	V	1.0						
Maximum DC reverse current at rated DC blocking voltage	$V_R=V_{DC}, T_A=25^{\circ}C$	I_{R1}	μA	2.0						
	$V_R=V_{DC}, T_A=125^{\circ}C$	I_{R2}		200						
Typical junction capacitance	4.0V DC, 1MHz	C_J	pF	18						

● **Ratings And Characteristics Curves** (Ta=25°C Unless otherwise specified)

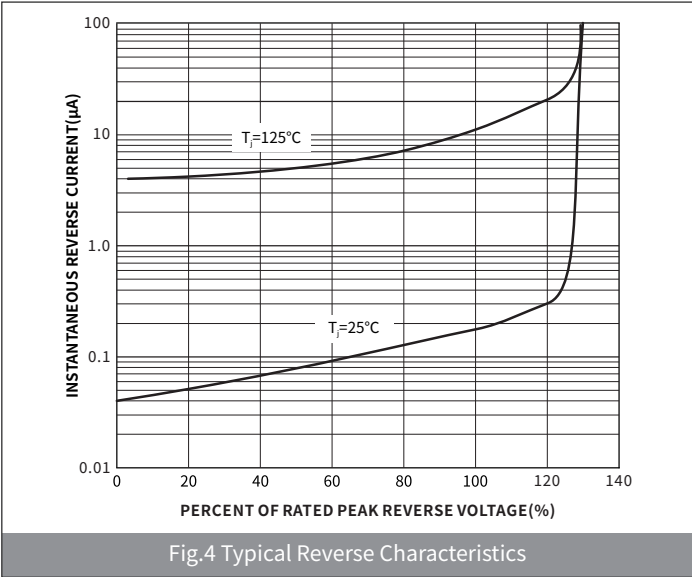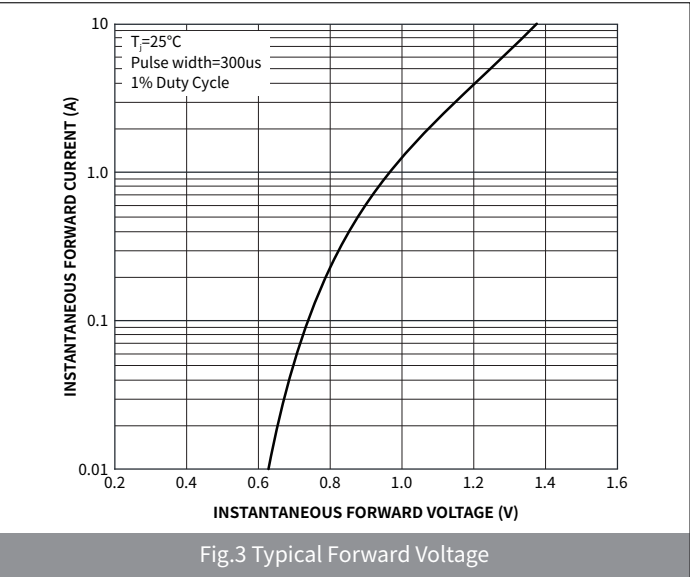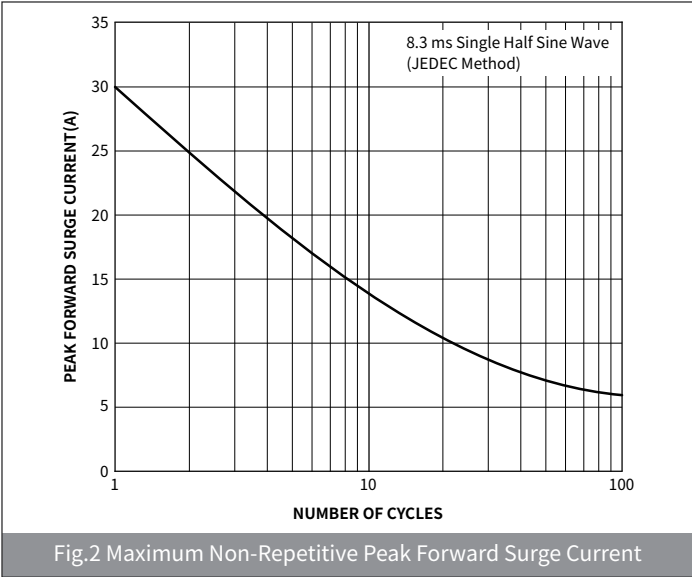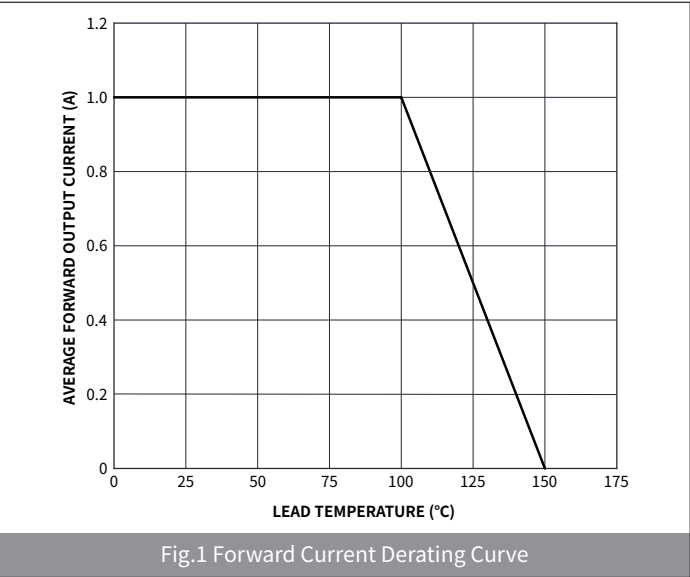

1N4001W THRU 1N4007W


SURFACE MOUNT GENERAL PURPOSE RECTIFIER

● Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-123FL	R1	0.0169	3000	45000	180000	7"

● Package Outline Dimensions (SOD -123FL)


Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.10	0.035	0.430
B	2.55	2.85	0.100	0.111
C	1.60	1.90	0.063	0.074
D	3.60	3.90	0.031	0.043
E	1.00	1.20	0.031	0.035
F	0.40	0.90	0.047	0.055
G	0.10	0.25	0.003	0.007

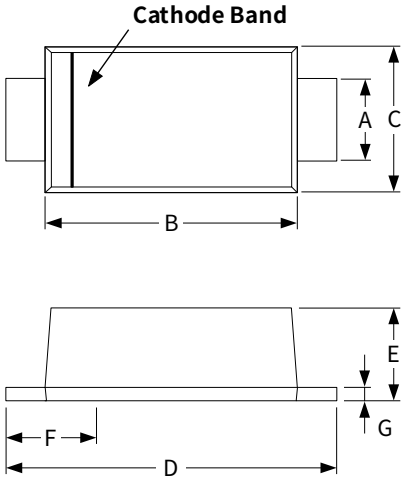

The diagram shows two views of the SOD-123FL package. The top view is a rectangle with dimensions B (width) and C (height). A vertical line on the left side is labeled 'Cathode Band'. The bottom view is a trapezoid with dimensions D (width), E (height), F (width of the base), and G (height of the base).

● Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	1.00	-	0.040	-
K	-	1.90	-	0.074
M	1.50	-	0.059	-

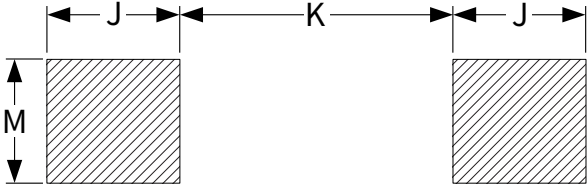

The diagram shows a suggested pad layout with two shaded rectangular pads. The width of each pad is J, the distance between the pads is K, and the height of each pad is M.