


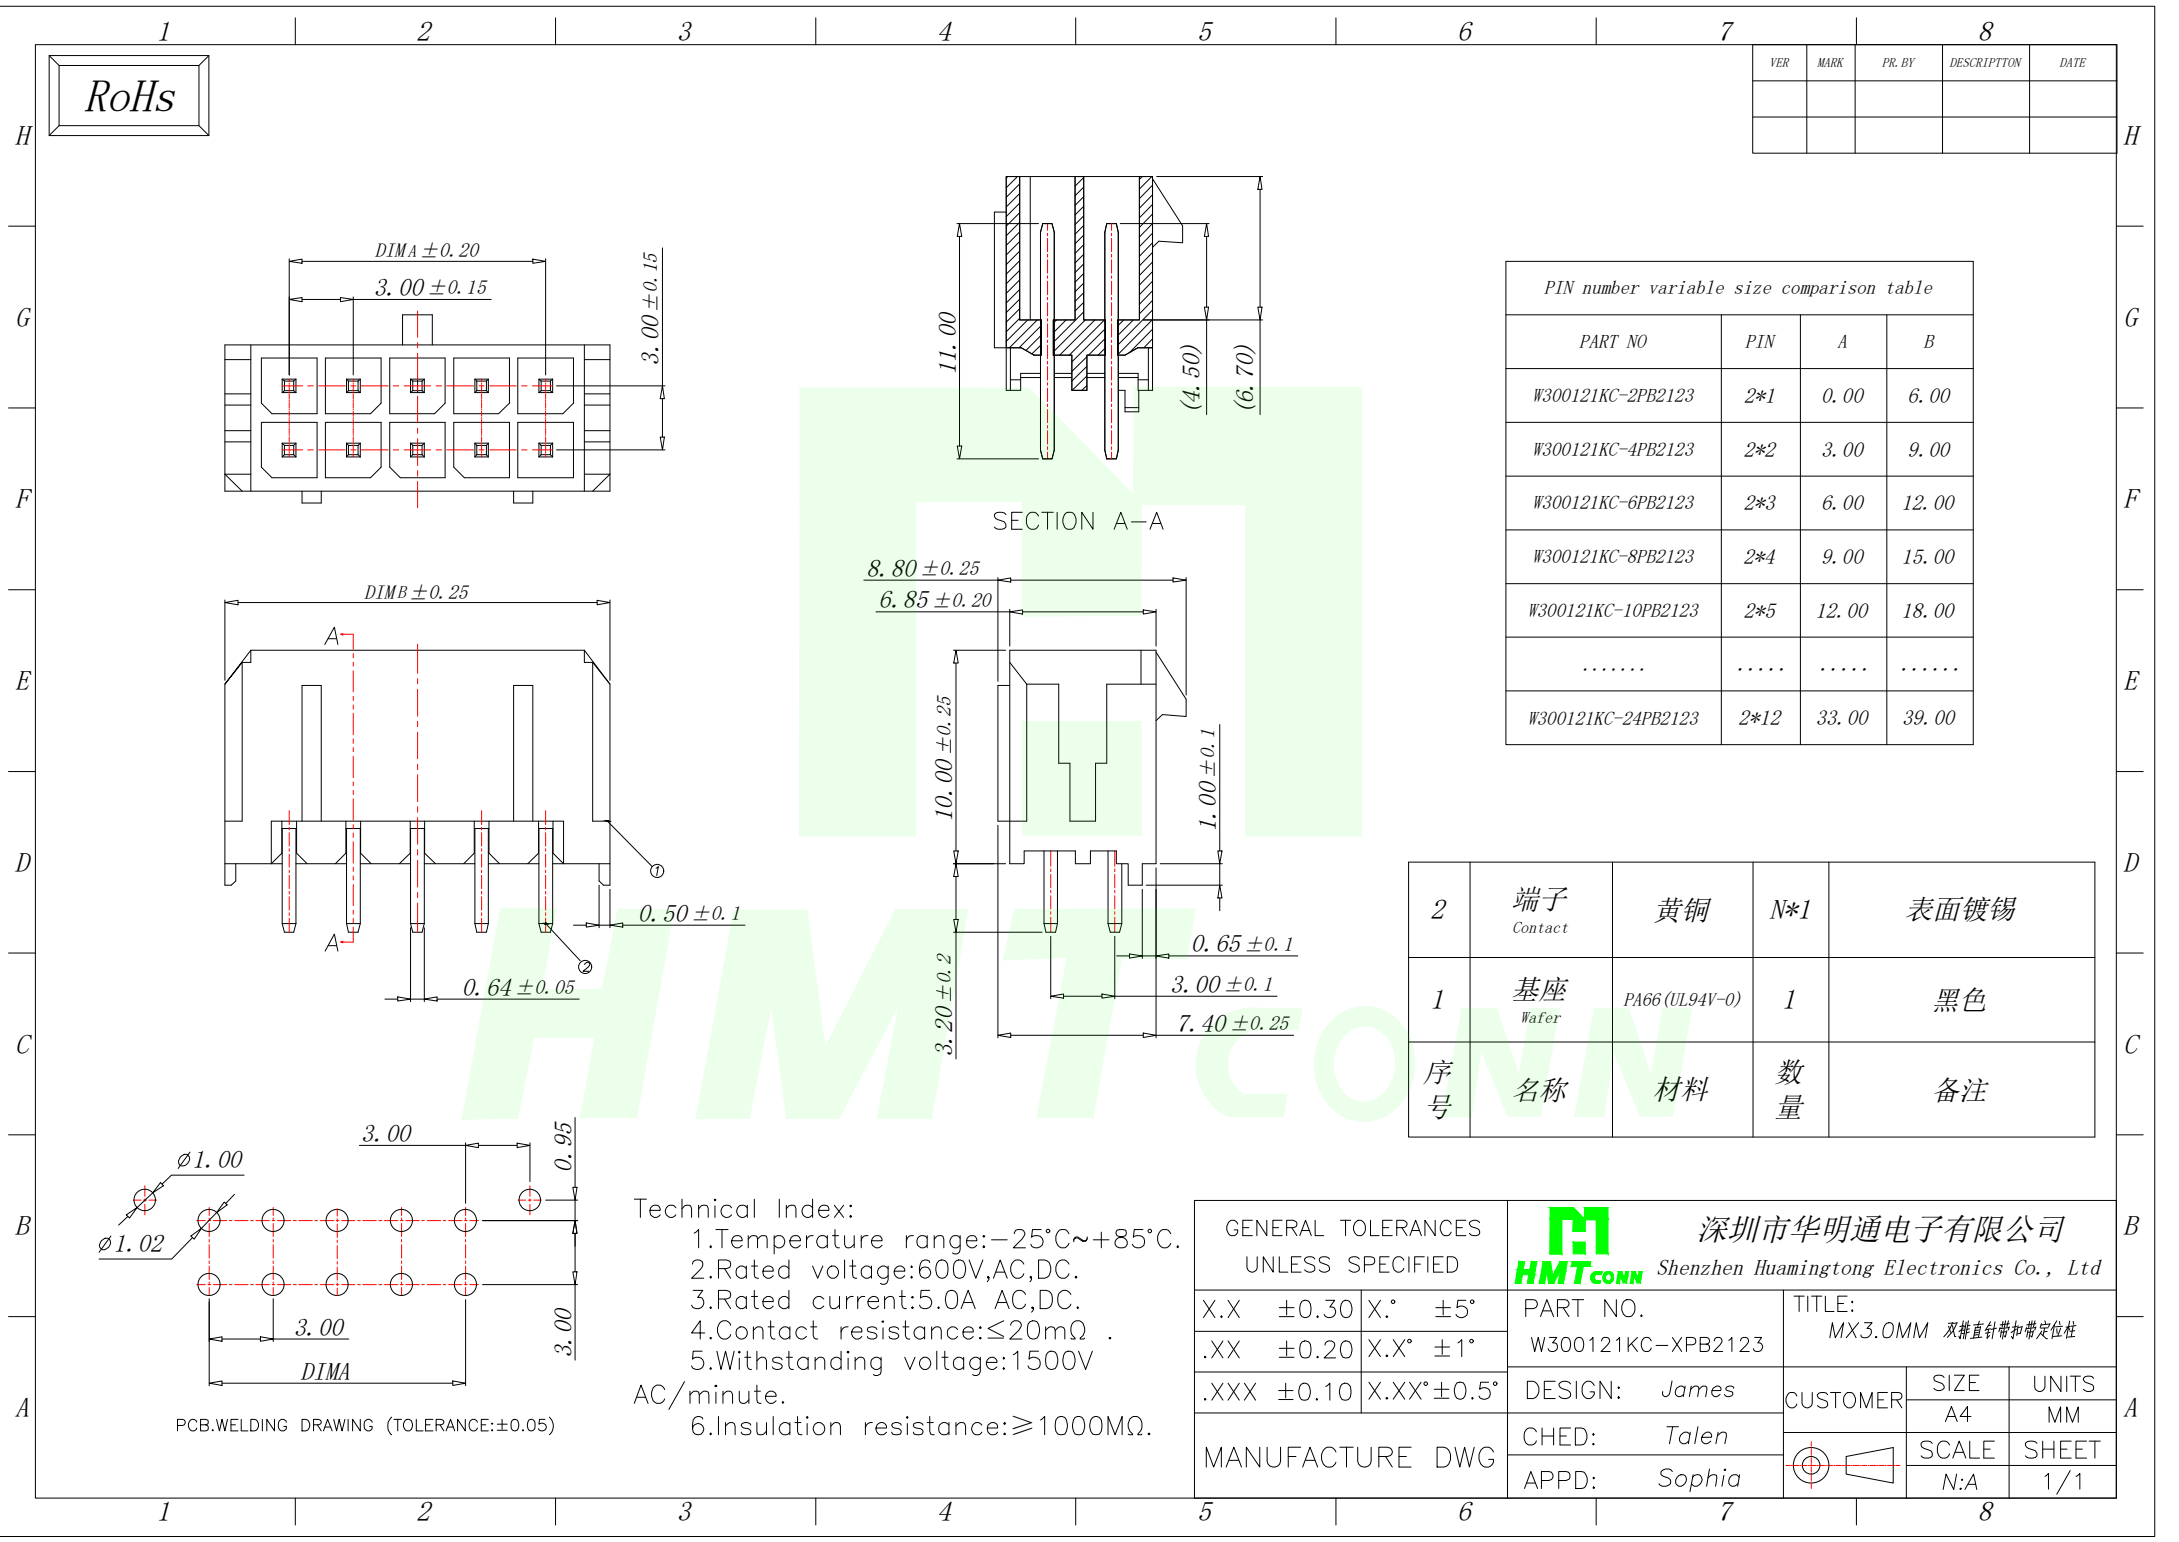

RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table			
PART NO	PIN	A	B
W300121KC-2PB2123	2*1	0.00	6.00
W300121KC-4PB2123	2*2	3.00	9.00
W300121KC-6PB2123	2*3	6.00	12.00
W300121KC-8PB2123	2*4	9.00	15.00
W300121KC-10PB2123	2*5	12.00	18.00
.....			
W300121KC-24PB2123	2*12	33.00	39.00

2	端子 Contact	黄铜	N*1	表面镀锡
1	基座 Wafer	PA66 (UL94V-0)	1	黑色
序号	名称	材料	数量	备注

Technical Index:
1.Temperature range:-25°C~+85°C.
2.Rated voltage:600V,AC,DC.
3.Rated current:5.0A AC,DC.
4.Contact resistance:≤20mΩ .
5.Withstanding voltage:1500V AC/minute.
6.Insulation resistance:≥1000MΩ.

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 <i>HMTCONN</i> <i>Shenzhen Huamingtong Electronics Co., Ltd</i>			
X.X ±0.30	X.° ±5°	PART NO.	TITLE:		
.XX ±0.20	X.X° ±1°	W300121KC-XPB2123	MX3.0MM 双排直针带扣带定位柱		
.XXX ±0.10	X.XX° ±0.5°	DESIGN: James	CUSTOMER 	SIZE	UNITS
MANUFACTURE DWG		CHED: Talen		A4	MM
		APPD: Sophia		SCALE	SHEET
				N:A	1/1