

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2011.08.30	黃小燕
02	△	依業務要求，新增膠紙	2012.12.24	邱明周
03	△	依上級要求，更新CAP外觀	2014.07.09	邱國強
04	△	Correct annotation meaning	2021.11.25	郭康

Specifications

Current Rating:2.0Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:500VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material:Brass




Insulator Material:High Temperature

Thermoplastic, UL 94V-0 Nylon HTN

(Halogen Free) or the equivalent material

All materials must meet Greenconn

hazardous substances control standards.

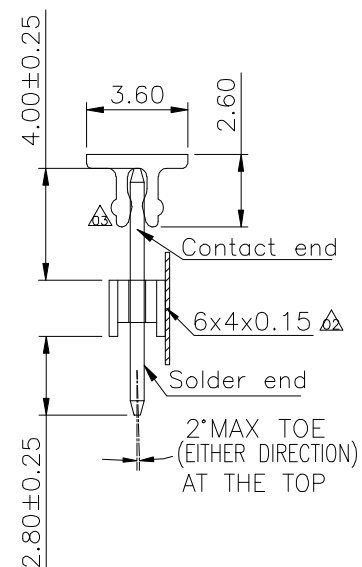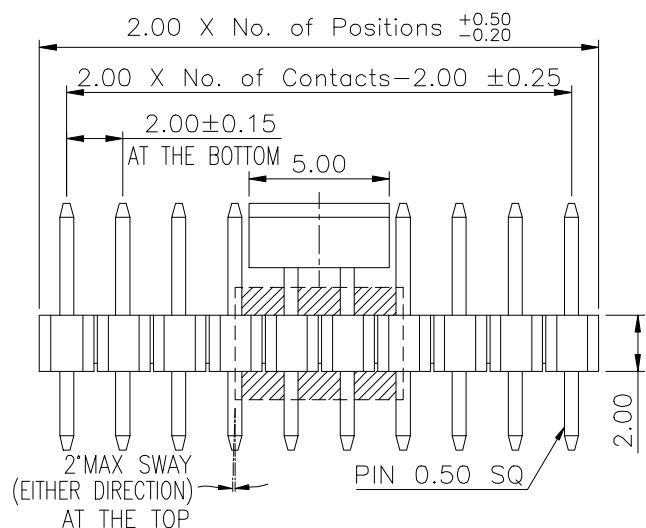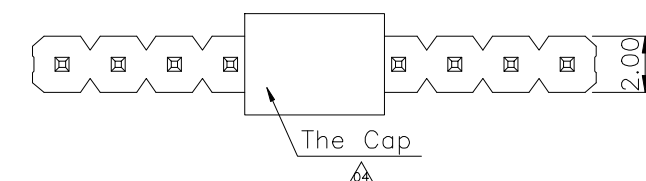

Ordering Information

G PFA101 - XX XX A 001 R 1 B X


No. of Pins per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black

Standard Packing
A=box
Selective Packing
C=Tube(03~40PIN)
E=CAP+Tube(03~40PIN)
F=CAP+Tape&Reel(02~40PIN)

Recommended P.C.Board
Layout
(Tolerance:±0.05)



3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X'±3.0'	X±0.25
.X'±2.0'	.X±0.20
.XX'±1.0'	.XX±0.13
.XXX'±0.5'	.XXX±0.08

DESIGNED: 郭康
CHECKED:
APPROVED:

DATE:2021.11.25
DATE:
DATE:

DWG. NO.
GPFA101-CA1RB
PART NO.
GPFA101-XXXX A001R1BX

TITLE.
2.00 PIN HEADER
SINGLE ROW DIP TYPE
BASE 2.00H