
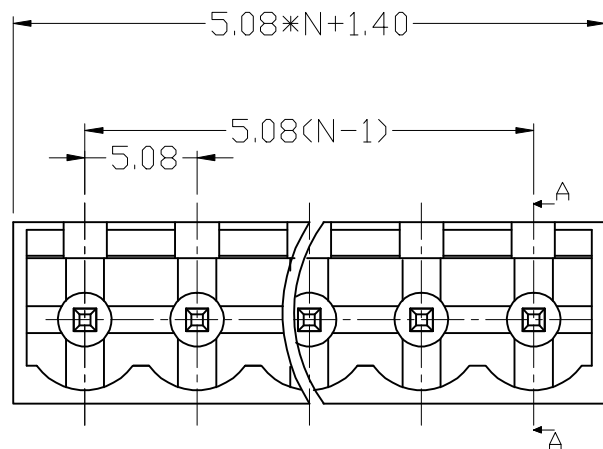


SECTION A-A

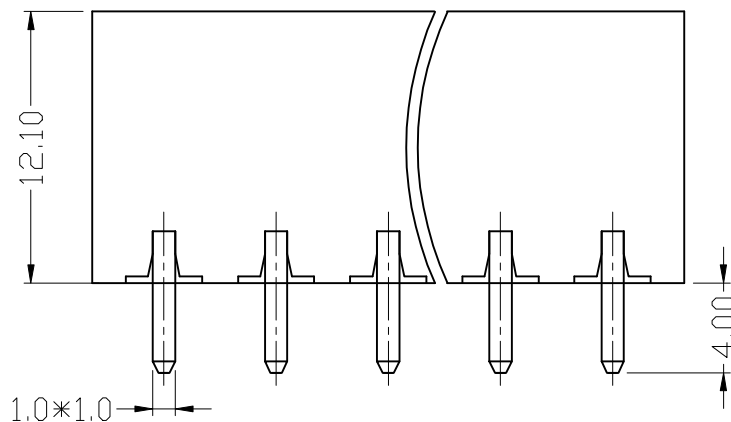

材质及电镀

焊针：黄铜，镀锡

塑件：PA66 UL94V-0

电气性能

额定电压：300V

额定电流：12A

接触电阻：20m

绝缘电阻：5000/1000V

耐电压：AC1500V/1min

机械性能

温度范围：-40 ° C~+105 ° C

瞬时温度：+250 ° C 5秒

		new		2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	2EDGVC-5.08-XXP	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X.	±0.25	
			MODEL NAME	2EDGVC-5.08-XXP			X.x	±0.20	
			3RD ANGLE PROJ	HanElectricity Co.,LTD				X.xx	±0.15
						ANGULAR		±3°	
								FILE.NO.	