

Specification for Approval

Customer:	
Customer P/N:	
EEC P/N:	ST06202E0
Spec No.:	
Version No.:	V0.1
Description:	Transformer
	Meet AEC-Q200 Standard

Customer Approval		EEC Approval	
Inspected By:		Issued By:	Bob
Checked By:		Checked By:	
Approved By:		Approved By:	
Approved Date:		Issued Date:	2022/8/1

Please Return One Copy to Us After Approved,TKS! (承认后请回寄一份,谢谢)

- Remark:
1. Before use, please confirm whether this product is suitable for your design, Scientific only ensure products meet this specification.
 2. This specification data change must be confirmed by both parties,any individual modification is invalid.
 3. If customer placed orders without signing back this specification, it is regarded as recognition



绵阳敦源电子科技有限公司
Mianyang Dunyuan Electronics Technology Co.,Ltd
地址：四川省绵阳市高新区综合保税区
ADD: Comprehensive Bonded Zone, High-Tech Industrial Development Zone Mianyang, SiChuan





Specification for Approval

Revision History


[illegible]

DESCRIPTION	EEC P/N:	SPEC NO	Version No.: V0.1
Transformer	ST06202E0		PAGE: 1/4

A. MECHANICAL(unit:mm)

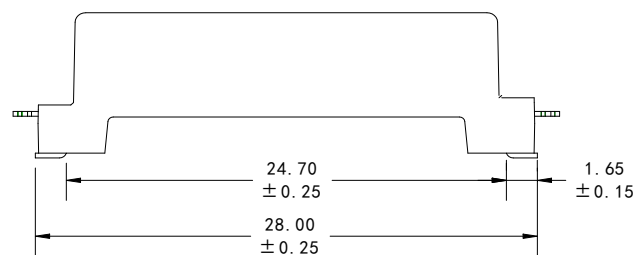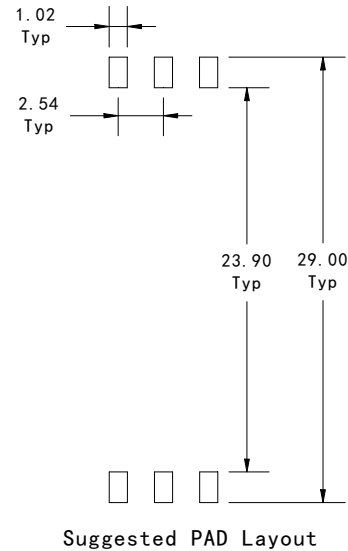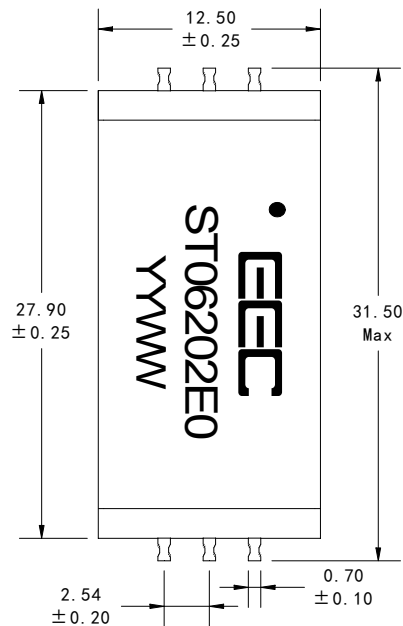


B. Schematics

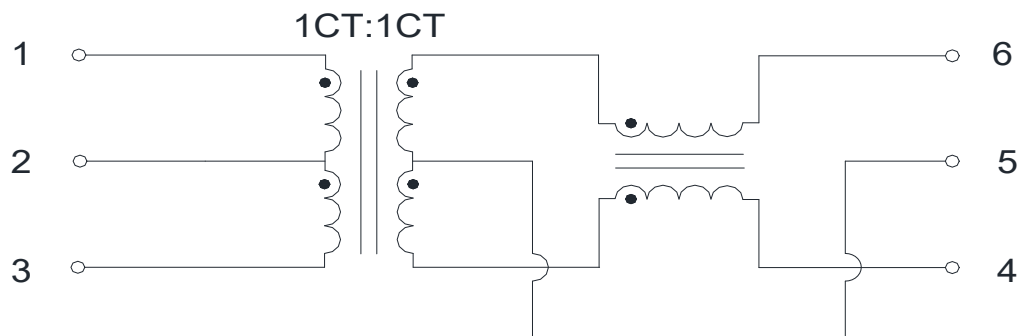

DESCRIPTION	EEC P/N:	SPEC NO	Version No.: V0.1
Transformer	ST06202E0		PAGE: 2/4

C. ELECTRICAL SPECIFICATIONS @25°C

1. OCL(TD & RD): 150uH Min. @ 100 KHz, 0.1V(-40°C ~ +125°C)
2. Leakage Inductance(TD & RD,TX & RX shorted): 0.6uH Max @ 100KHz, 0.1V
3. DCR:Transformer side: 500mΩ Max
CM choke side: 600mΩ Max
4. Turns Ratio: 1CT:1CT±2%
5. Insertion Loss: -1.0 dB Max @ 4 MHz
6. Return Loss: -20 dB Min @ 4 MHz
7. Common Mode Rejection: -30 dB Min @ 1-100 MHz
8. Isolation Hipot: 6400VDC 1mA 60S or 5000VAC 1mA 60s
9. Reinforced Insulation At a Working Voltage Of 1500VDC And The Creepage Distance Of 15mm Min And The clearance distance Of 14mm Min
10. Operating Temperature: -40°C to +125°C
11. Storage Temperature(With Package): +10°C to +40°C
12. Storage Temperature(Without Package, Just For Components): -40°C to +125°C
13. RoHS Compliant

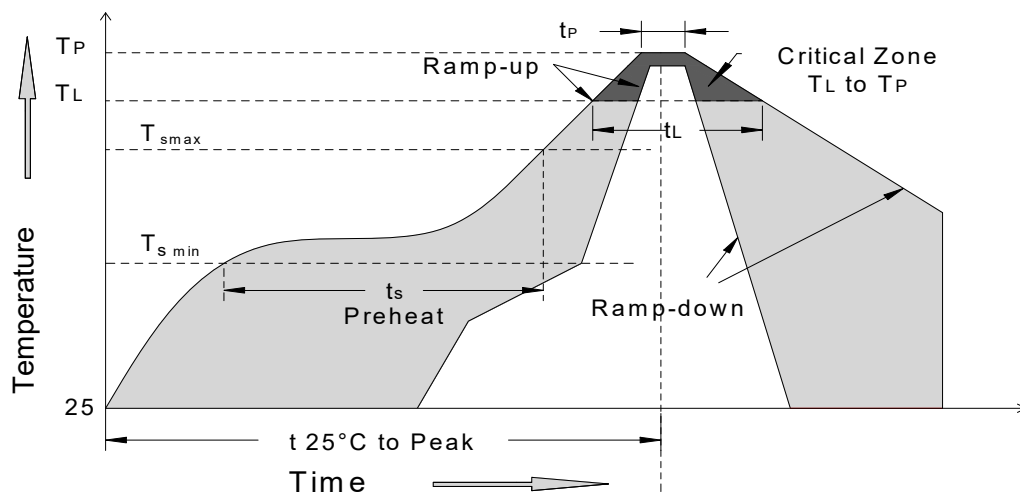D. RECOMMEND WAVE SOLDERING CURVE

MSL:

Grade: 1 level. Floor life: 0.5 year Condition: <=30°C/60%RH.





Ramp up rate=3°C/s max Ramp down rate=6°C/s max

TL=217°C tL=60s-150s Tp=250+/-3°C Time within 5°C of actual Peak Temperature (tp): 20~40s

Ts min=150°C Ts max=200°C Ts min to Ts max: 60s-180s, 25°C to peak Temperature: 8minutes max

DESCRIPTION	EEC P/N:	SPEC NO	Version No.: V0.1
Transformer	ST06202E0		PAGE: 3/4

E. Packaging specification

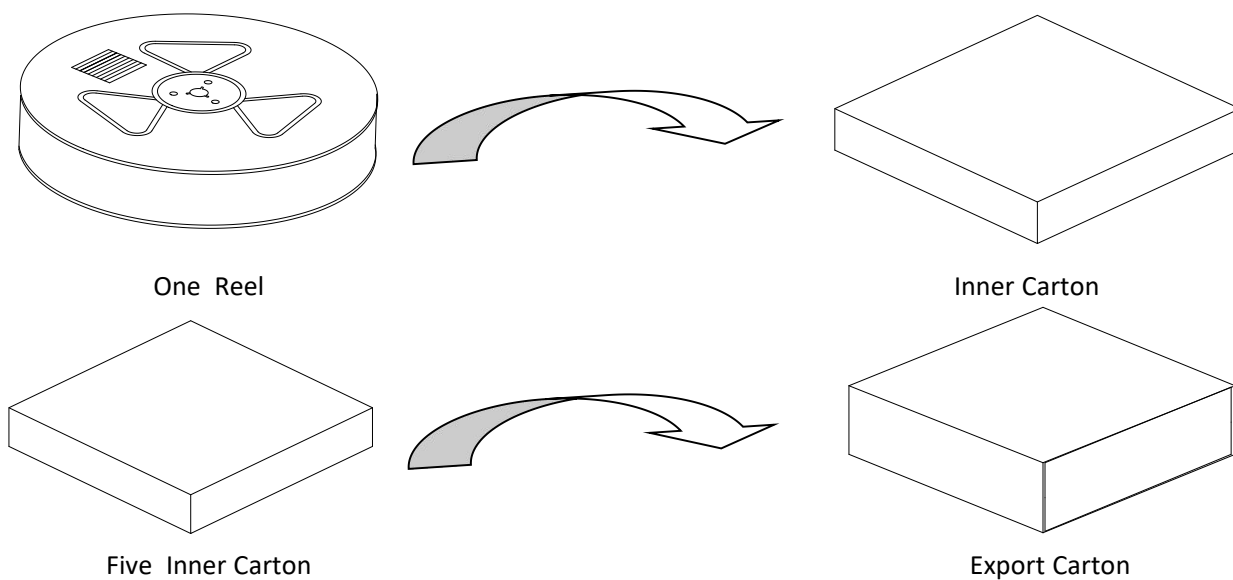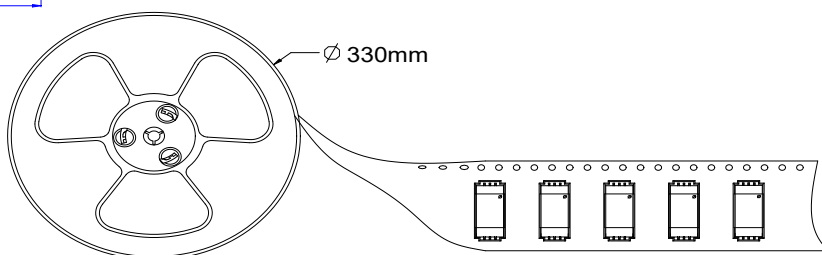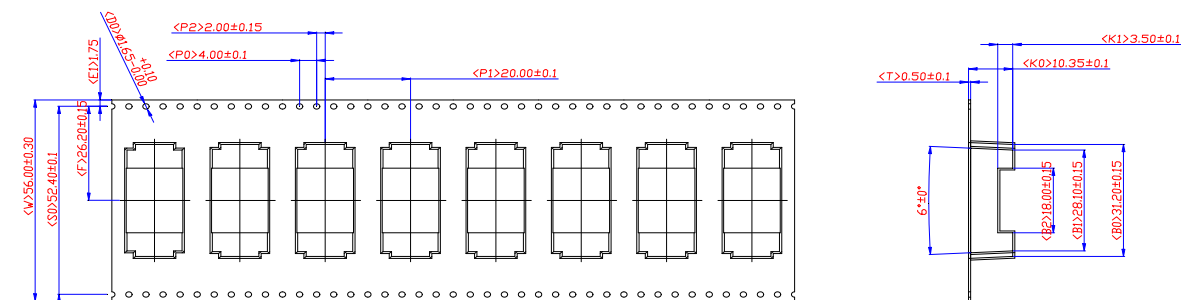

Package Quantity:

One Reel=300Pcs

One Inner Carton=300*1=300Pcs

One Export Carton=300*5=1500Pcs

DESCRIPTION	EEC P/N:	SPEC NO	Version No.: V0.1
Transformer	ST06202E0		PAGE: 4/4