3端子滤波器

$\mathop{YFF21PC1A475MT000N_{\text{\#}}}_{\not \simeq \text{LR}}$









用途	一般等级
特点	Power 电源线用
系列	YFF
状态	量产体制
品牌	TDK



	尺寸	
长度(L)	$2.00 \text{mm} \pm 0.20 \text{mm}$	
宽度(W)	1.25 mm ± 0.20 mm	
厚度(T)	0.85 mm ± 0.15 mm	

······································	气特性
插入损耗 [Typ.]	30dB (0.3MHz~3GHz)
截止頻率 [Typ.]	
额定电压 [Max.]	10V
额定电流 [Max.]	4A
定格電流额定值降低	
直流电阻(Max.)	$14\mathrm{m}\Omega$
额定电容 [Typ.]	4. 7 μ F

	其他
电路型	贯通型
传输线路	单端
使用温度范围	-55∼125° C
焊接方法	回流
AEC-Q200	NO
包装形式	纸编带(180mm卷筒)
包装个数	4000pcs
重量	

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website. ! All specifications are subject to change without notice.


YFF21PC1A475MT000N新









特性图表(这是参考数据,并不保证产品的特性。)

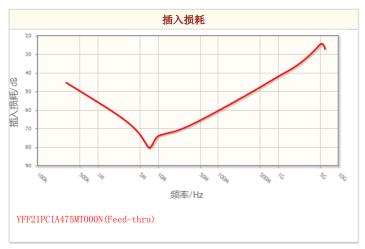


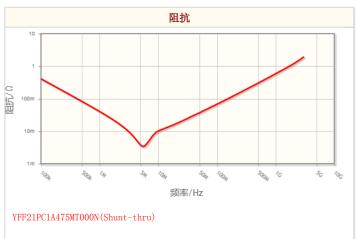





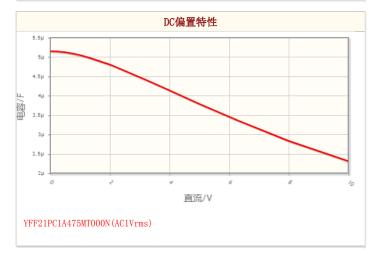

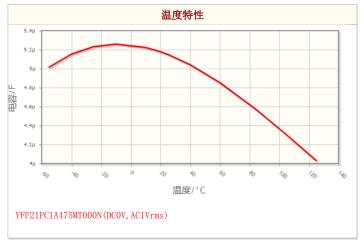

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

$\mathop{YFF21PC1A475MT000N_{\it \#}}_{\not\simeq \mathbb{H}}$












Associated Images







[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website. ! All specifications are subject to change without notice.