


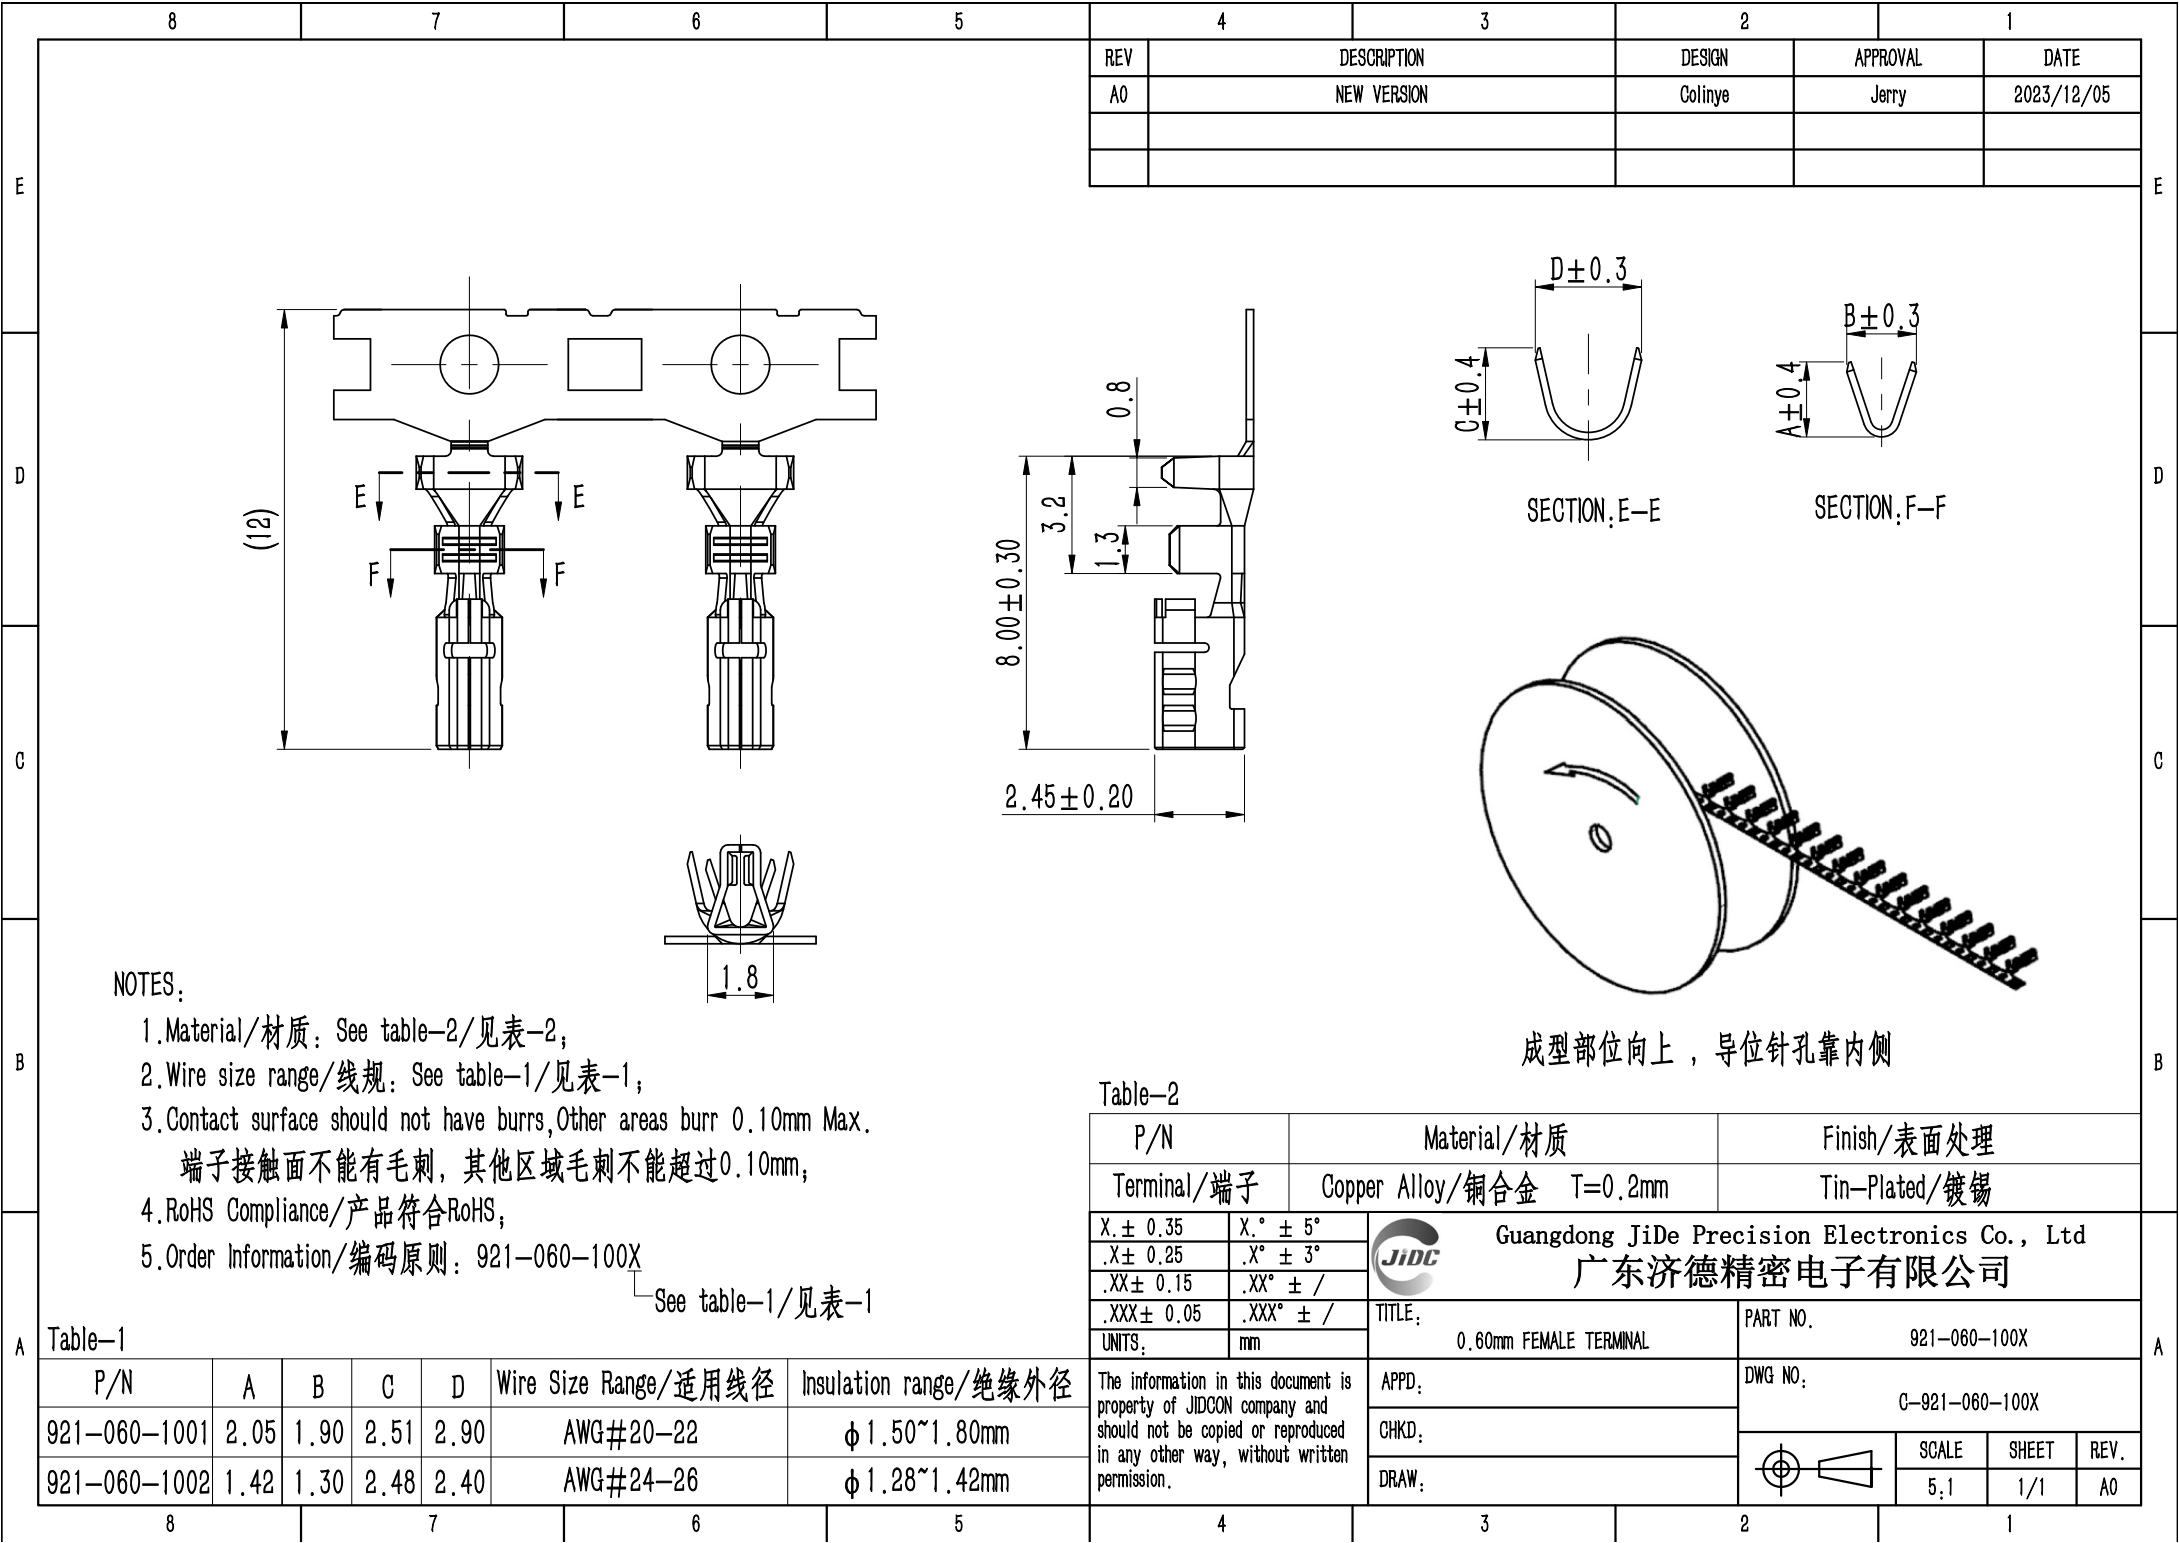

NOTES:


1. Material/材质: See table-2/见表-2;
2. Wire size range/线规: See table-1/见表-1;
3. Contact surface should not have burrs, Other areas burr 0.10mm Max.
端子接触面不能有毛刺, 其他区域毛刺不能超过0.10mm;
4. RoHS Compliance/产品符合RoHS;
5. Order Information/编码原则: 921-060-100X

See table-1/见表-1

Table-1

P/N	A	B	C	D	Wire Size Range/适用线径	Insulation range/绝缘外径
921-060-1001	2.05	1.90	2.51	2.90	AWG#20-22	φ1.50~1.80mm
921-060-1002	1.42	1.30	2.48	2.40	AWG#24-26	φ1.28~1.42mm

Table-2

P/N		Material/材质		Finish/表面处理	
Terminal/端子		Copper Alloy/铜合金 T=0.2mm		Tin-Plated/镀锡	
X.± 0.35	X.° ± 5°		Guangdong JiDe Precision Electronics Co., Ltd 广东济德精密电子有限公司		
.X± 0.25	.X° ± 3°				
.XX± 0.15	.XX° ± /				
.XXX± 0.05	.XXX° ± /				
UNITS:	mm				
The information in this document is property of JIDCON company and should not be copied or reproduced in any other way, without written permission.		TITLE:		PART NO.	
		0.60mm FEMALE TERMINAL		921-060-100X	
		APPD:		DWG NO:	
		CHKD:		C-921-060-100X	
		DRAW:			
		SCALE		SHEET	REV.
		5:1		1/1	A0