
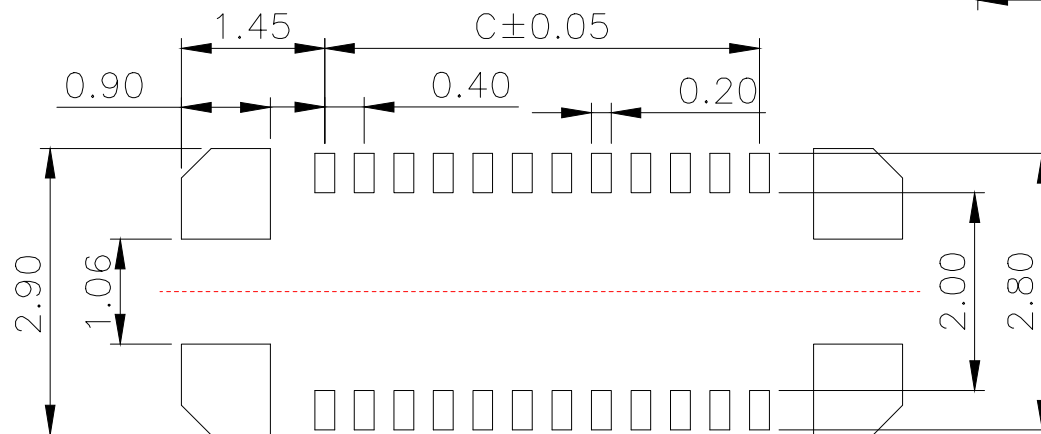

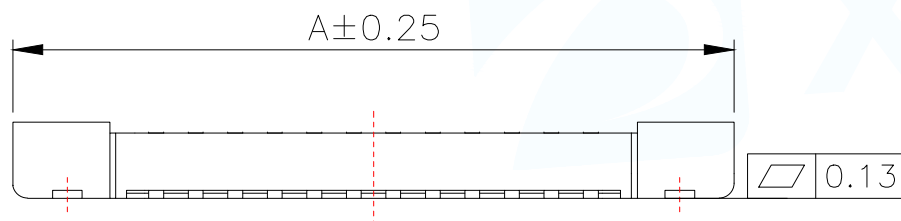



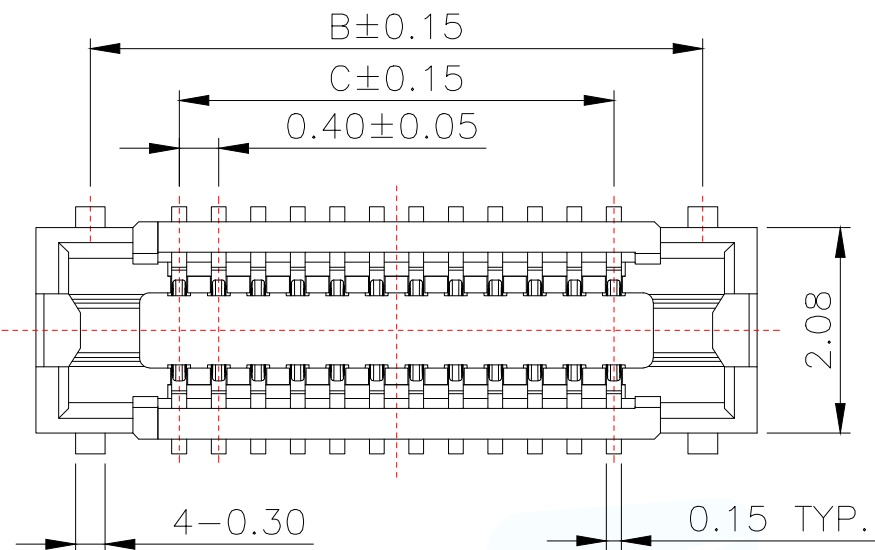

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN;
- 4.CONTACT RESISTANCE: 100m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -35°C TO 85°C .

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;
- 3.METAL FITTINGS: COPPER ALLOY.

PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 50u" MIN. OVER ALL;
- 2.METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.

Model	PIN	DIM A	DIM B	DIM C
BTB0.408-10PLBDR-M41	10	4.50	3.40	1.60
BTB0.408-12PLBDR-M41	12	4.90	3.80	2.00
BTB0.408-16PLBDR-M41	16	5.70	4.60	2.80
BTB0.408-20PLBDR-M41	20	6.50	5.40	3.60
BTB0.408-24PLBDR-M41	24	7.30	6.20	4.40
BTB0.408-30PLBDR-M41	30	8.50	7.40	5.60
BTB0.408-34PLBDR-M41	34	9.30	8.20	6.40
BTB0.408-40PLBDR-M41	40	10.50	9.40	7.60
BTB0.408-50PLBDR-M41	50	12.50	11.40	9.60

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:	ANGLES:	TITLE: BTB P0.40 SOCKET	
.X $\pm$ 0.25	$\pm 1^{\circ}$	PAR	BTB0.408-XPLBDR-M41
.XX $\pm$ 0.20		DWN	
.XXX $\pm$ 0.10		CHKD	
		APVD	
		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
		CUSTOMER COPY	REV:A