
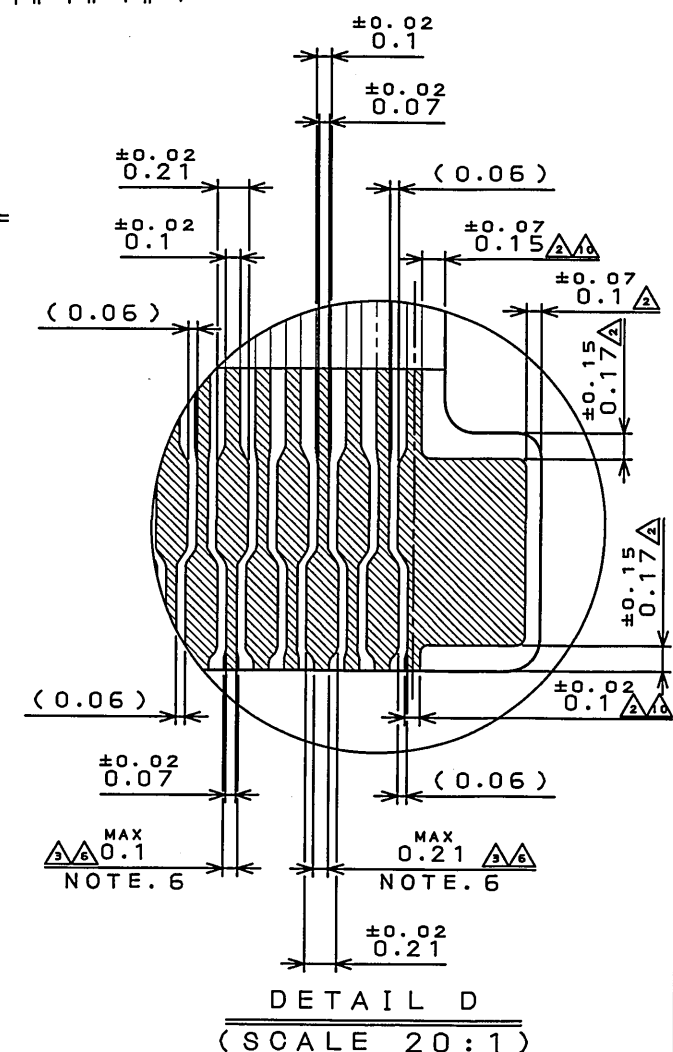
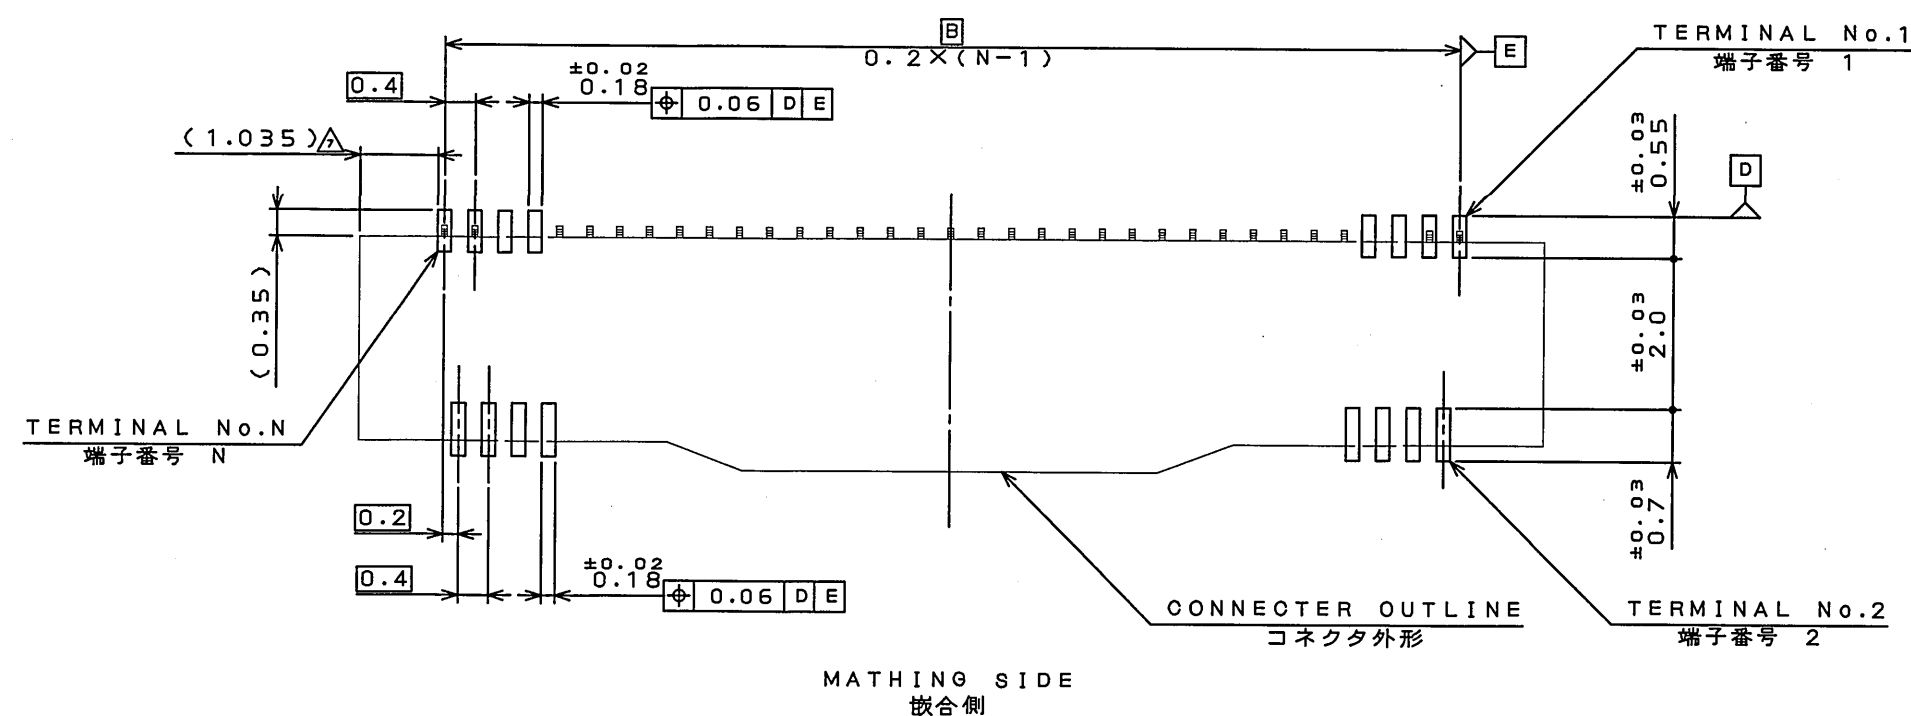
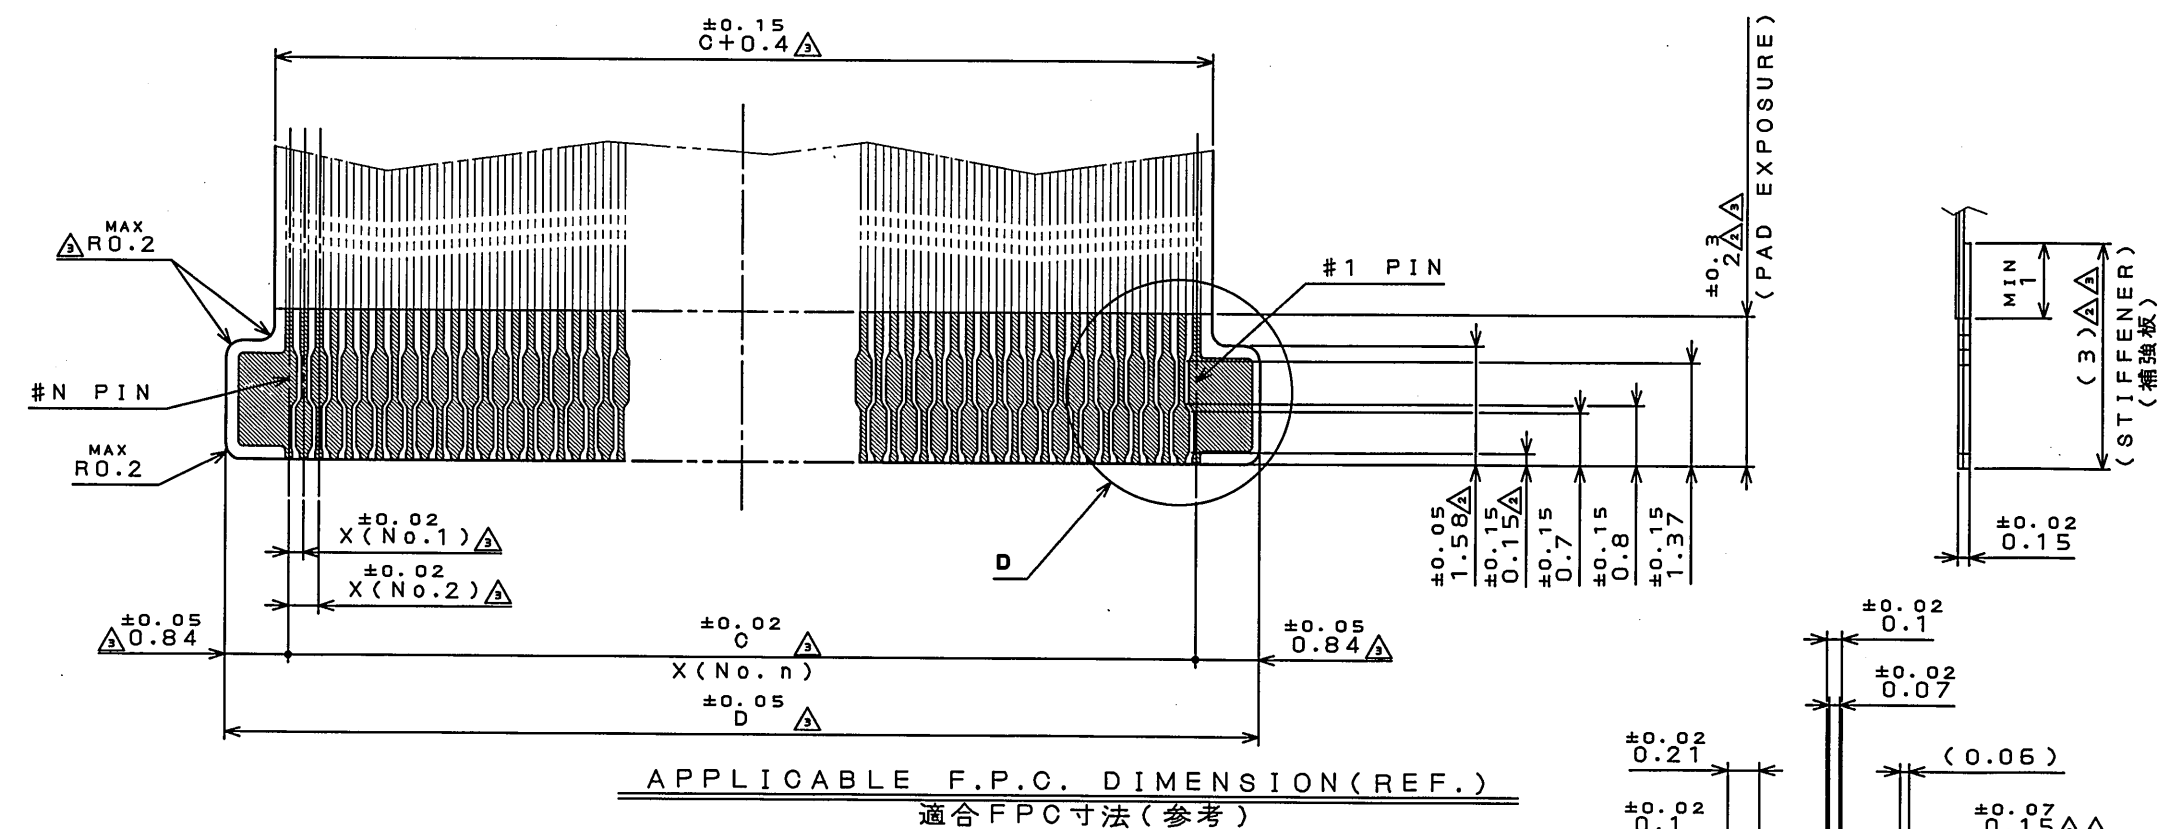
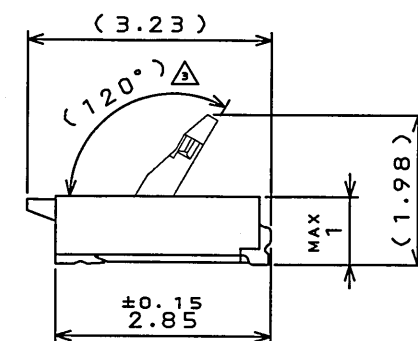





NOTE

1. REFER TO TABLE2 FOR ROOMENDED FPO COMPOSITION.
2. LOT NUMBER IS MARKED ON THE TOP PORTION OF THE CONNECTOR.
3. A NICKEL BARRIER EXISTS BETWEEN EACH CONTACT POINT AND TAIL.
4. THE DIMENSIONS OF VACUUMING COVER AREA.
5. COVERLAY EDGE INCLUDES A PROJECTION OF AN ADHESION LAYER.
6. DIMENSION OF TIP IS OPTIONAL WITHIN ABOVE RANGE WITHOUT PATTERN PEELING.

	PRODUCT NO.	A	B	C	D
△	FF08258A1	7.05	4.80	4.80	6.48
△	FF08298A1	7.85	5.60	5.60	7.28
	FF08418A1	10.25	8.00	8.00	9.68
△	FF08518A1	12.25	10.00	10.00	11.68
	FF08718A1	16.25	14.00	14.00	15.68
	FF08818A1	18.25	16.00	16.00	17.68

4	ACTUATOR アクチュエータ	1	HEAT RESISTING PLASTICS 耐熱プラスチック		COLOR:BLACK/色相:黒色 UL94V-0
3	BASE INSULATOR ベースインシュレータ	1	HEAT RESISTING PLASTICS 耐熱プラスチック		COLOR:BEIGE/色相:肌色 UL94V-0
2	CONTACT 2 コンタクト2	(N-1) 2	COPPER ALLOY 銅合金	PARIAL GOLD(0.1μm MIN)OVER NICKEL ニッケル上部分Au 0.1 μm以上	
1	CONTACT 1 コンタクト1	(N-1) 2	COPPER ALLOY 銅合金	PARIAL GOLD(0.1μm MIN)OVER NICKEL ニッケル上部分Au 0.1 μm以上	
符号 NO.	名称 DESCRIPTION	数量 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書(SPECIFICATION)		第1版(ORIGINAL DATE) 16.JUL.2008		尺度(SCALE) 10:1	シリーズ(SERIES) FF08
△ JACS-10532-# △ JAHL-10532		製図 DR.		名称(TITLE)	日本航空電子工業株式会社 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
公差(GENERAL TOLERANCE)		担当 CHK.	K.ASHIBU	FF08**SA1	
寸法(DIMENSION)	角度(ANGLES)	査閲 APPD.	K.INOUE	(**:PIN COUNT)	
. ±0.8	X° ±	承認 APPD.	Y.MIZUSAWA		
.X ±0.4	X°X' ±				
.XX ±0.1					図面番号(DRAWING NO.)
.XXX ±				質量(MASS)	
					SJ108178