
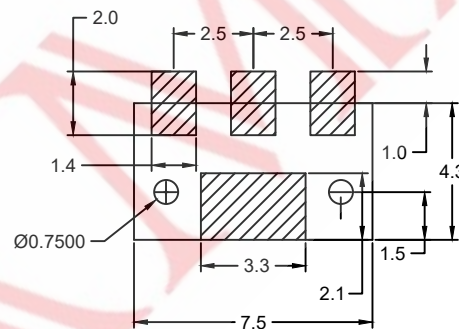
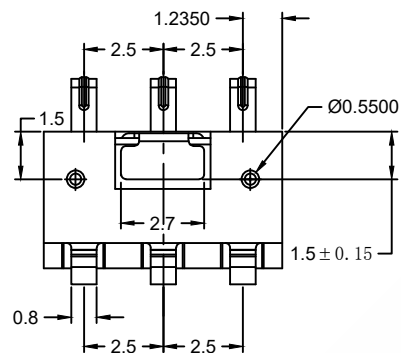
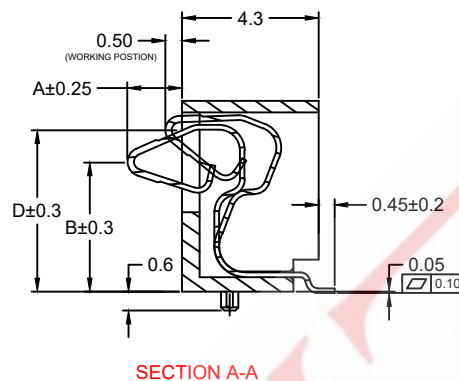


Performance:
Rated current: 2.0A
Rated voltage: 12V
Withstand voltage: 500V
Contact resistance: within 30mΩ
Insulation resistance: 500MΩ
Operating temperature: -40℃ to +85℃
Plastic part (material): LCP
Contact point (material): phosphor bronze,
contact plated with 3U" gold.



RECOMMENDED PCB LAYOUT

TOP VIEW (.XX $\pm$ 0.05)

00	F	4	*	3	0	0	0
⏟	⏟	⏟	⏟	⏟	⏟	⏟	⏟
(A)	(B)	(C)	(D)	(E)	(F)	(G)	(H)

- A.Series: 00:7 Series
B.Spring contact pitch: F-2.5mm
C.Fixing method: 4-Horizontal Mounting
D.Product height: 1-H6.0/2-H7.0mm
E.PIN NO: 3-3PIN
F:Main body material: 0-LCP
G:Spring contact material: 0-Phosphor bronze
H:Mold code: 0-Convention

PART NO.	A	B	C	D
00F4-1-3-000	1.85	4.5	6.0	5.2
00F4-2-3-000	1.85	5.5	7.0	6.2

										FIRST VIEW				The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM 		TITLE::								
												2.5mm 卧贴 3PIN 带柱												
										GENERAL TOLERANCE		DWG NO: 00F4-P8001												
										≥0~2< ±0.15		SCALE	1:1			UNIT	mm	PART NO: 00F4000F300						
A											DESIGN		WANGGUIFA	2018.06.12	≥2~5< ±0.25		SAMZO COMPONENTS				MODEL NO: 00F4-* -3-000		A	
											CHECKED		ZHENGUILAN	2018.06.12	≥0~2< ±0.15						NAME:			
	B	塑胶	LCP	1	黑色											APPROVED		LILIANJIANG	2018.06.14	≥5 ±0.35		DC CONN		
1		2		3		4		5		6		7		8										