

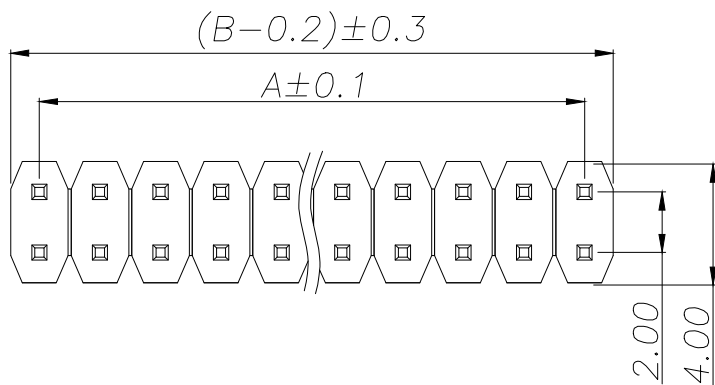
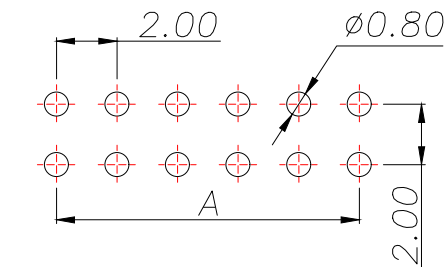


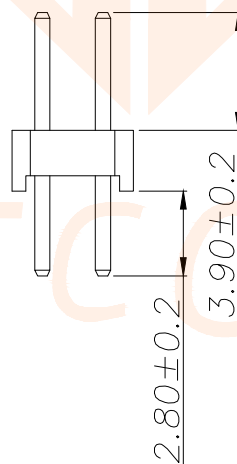

SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Withstanding Voltage: AC 500V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Gold Flash
Max. Processing Temp:
240°C for 30-60 seconds
(260°C for 5 seconds)

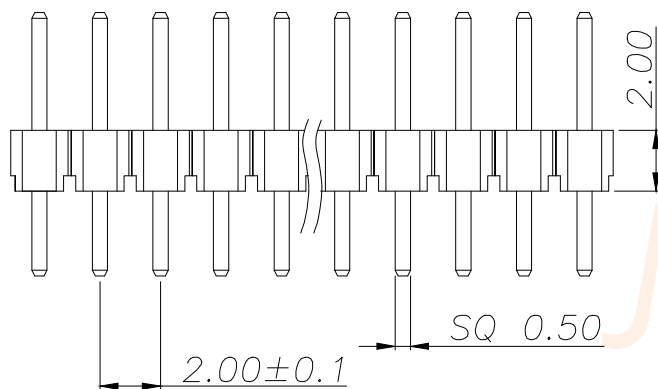

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

P/N	PIN	DIM.A	DIM.B
A200M01-0B2P51-H20C28	2*1	0.00	2.00
A200M01-0B4P51-H20C28	2*2	2.00	4.00
A200M01-0B6P51-H20C28	2*3	4.00	6.00
A200M01-0B8P51-H20C28	2*4	6.00	8.00
A200M01-0B10P51-H20C28	2*5	8.00	10.00
A200M01-0B12P51-H20C28	2*6	10.00	12.00
A200M01-0B14P51-H20C28	2*7	12.00	14.00
A200M01-0B16P51-H20C28	2*8	14.00	16.00
A200M01-0B18P51-H20C28	2*9	16.00	18.00
.....			
A200M01-0B80P51-H20C28	2*40	(40-1)x2.0	(40)x2.0

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd		
X.X ±0.30	X.* ±5°	PART NO.	TITLE: 2.0PH H2.0 2xnPin 180	
.XX ±0.20	X.X* ±1°	A200M01-0BXP51-H20C28	# PC2.8 PA3.9 PB2.0 L8.7	
.XXX ±0.10	X.XX* ±0.5°	DESIGN: Ethan	MANUFACTURE DWG	
UNITS	mm	CHED: Olvia		SCALE
MATERILA	---	APPD: Ava		SHEET
FINISH	---		N:A	1/1