



广州市东裕光电科技有限公司

产品规格书

SPECIFICATION

客户名称 CUSTOMER	
产品名称 PRODUCTION	反射式光电开关 Reflective Sensor
产品型号 MODEL	DYWH-ITR1502SR40A/08T
版本号 VERSION NO	A1.0

厂址(Add): 广东省广州市番禺区石基镇海涌路3号10号厂房2楼

电话(Tel): 18038161512

传真(Fax): 020-39966833

网址(Net): www.tonyuled.cn www.tonyuled.com



客户确认 CUSTOMER CONFIRMATION	审 核 CHECKED BY	编 制 PREPARED BY
	邓晓军	区家俊



DYWH-ITR1502SR40A/08T



Features

- High sensitivity
- Cut-Off visible wavelength
- Compliance Halogen Free(Br < 900ppm, Cl < 900ppm, Br+Cl < 1500ppm)
- Compliance with EU REACH
- This product itself will remain within RoHS compliant version.
- Optimal Sensing Distance: 4 mm
- Package size : 4.0*3.0*2.0 mm

Description

- **DYWH-ITR1502SR40A/08T** is a compact-package, phototransistor output, reflective photo interrupter, with emitter and detector facing the same direction in a molding that provides non-contact sensing. The compact package series is a result of unique technology, combining transfer and injection molding, that also blocks visible light to minimize false detection. This device has a long focal distance for this family of devices and has a leadless (T&R) package, suitable for reflow soldering.

Applications


- Detection of object presence or motion.
- Example : printer, optical storage, Projector

Device Selection Guide

Device No.	Chip Material	Lens Color
IR	GaAs	Black clear
PT	Silicon	Black clear

Package Dimensions

Top View

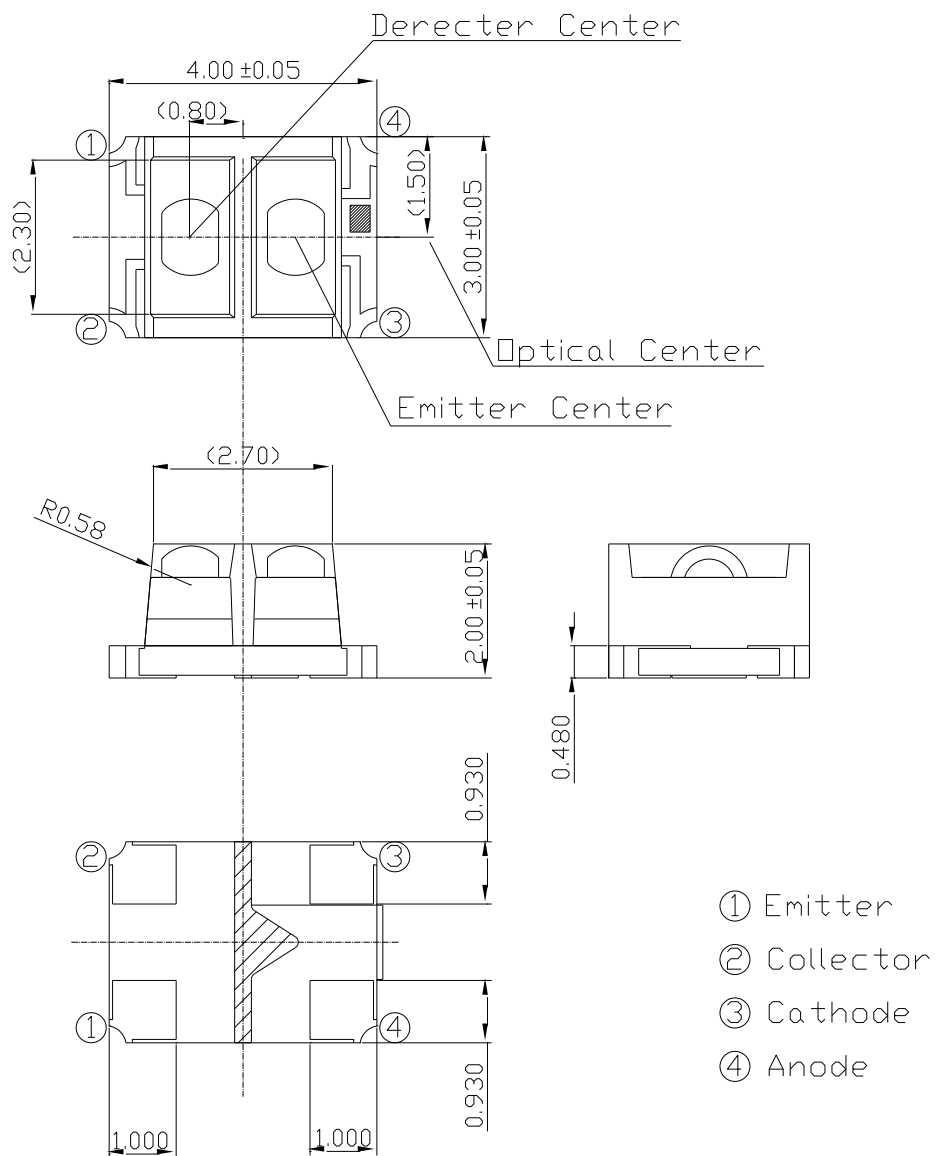

● Notes:

1. All dimensions are in millimeters
2. Tolerances unless dimensions ± 0.1 mm
3. Lead spacing is measured where the lead emerge from the package
4. Product mass : approx. 0.025g

Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25 °C Free Air Temperature	Pd	75	mW
	Reverse Voltage	V _R	5	V
	Forward Current	I _F	50	mA
	Peak Forward Current (*1) Pulse width ≤100μs, Duty cycle=1%	I _{FP}	1	A
Output	Collector Power Dissipation	P _C	75	mW
	Collector Current	I _C	25	mA
	Collector-Emitter Voltage	B V _{CEO}	30	V
	Emitter-Collector Voltage	B V _{ECO}	5	V
Operating Temperature		T _{opr}	-25~+85	°C
Storage Temperature		T _{stg}	-40~+100	°C
Lead Soldering Temperature (*2) (1/16 inch form body for 5 seconds)		T _{sol}	260	°C

● Notes:

(*1) tw=100 μsec., T=10 msec.

(*2) t=10 Sec

Electro-Optical Characteristics (Ta=25°C)


Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input	Forward Voltage	V _F	—	1.2	1.4	V	I _F =20mA
	Reverse Current	I _R	—	—	10	μA	V _R =6V
	Peak Wavelength	λ _p	—	940	—	nm	I _F =10mA
Output	Dark Current	I _{CEO}	—	1	100	nA	V _{CE} =20V
Transfer Characteristics	Collect Current	I _C (ON)	60	—	450	μA	V _{CE} =2V I _F =4mA d=4mm
		I _C (OFF)	—	—	600	nA	V _{CE} =2V I _F =4mA
	Response time	t _r	—	20	100	μs	V _{CE} =2V, I _C =100μA, RL=1kΩ, d=4mm
		t _f	—	20	100	μs	

*Operating dark current may be affected by surrounding situation


Bin Range of Collect Current

Bin number	Min	Max
A	60	120
B	100	220
C	180	350
D	310	450


Test Condition and Arrangement for Collector Current

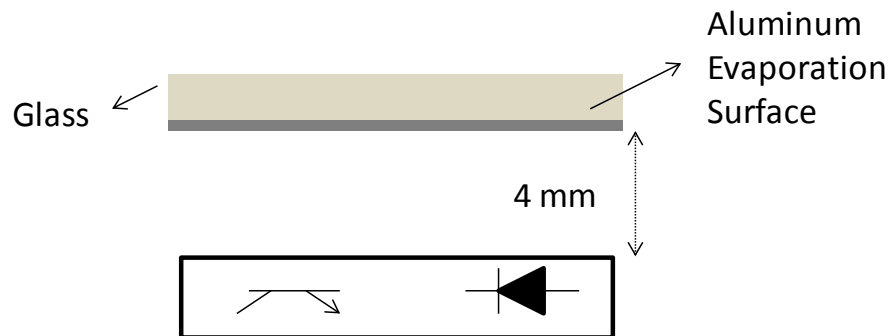


Typical Electro-Optical Characteristics Curves

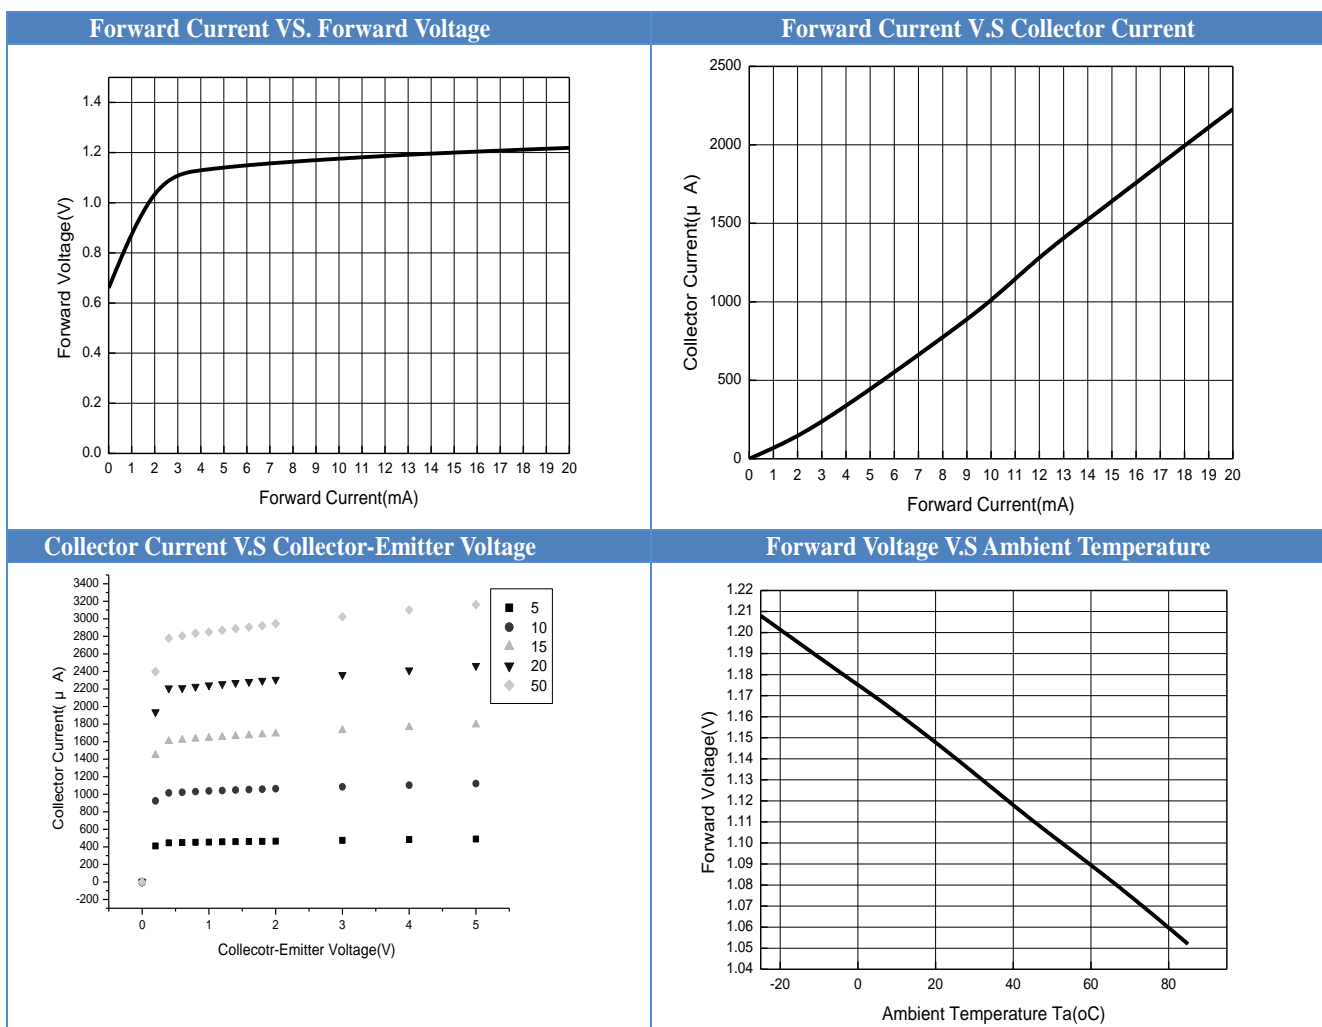


Relative Collector Current V.S
Ambient Temperature

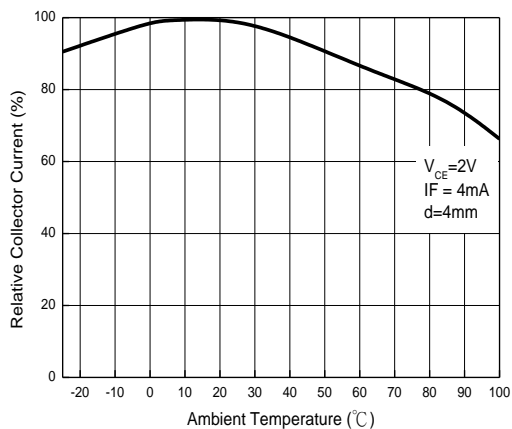


Relative Collector Current V.S Z-Moving Distance
Condition : $I_F=4\text{ mA}$ 、 $V_{CE}=2\text{ V}$

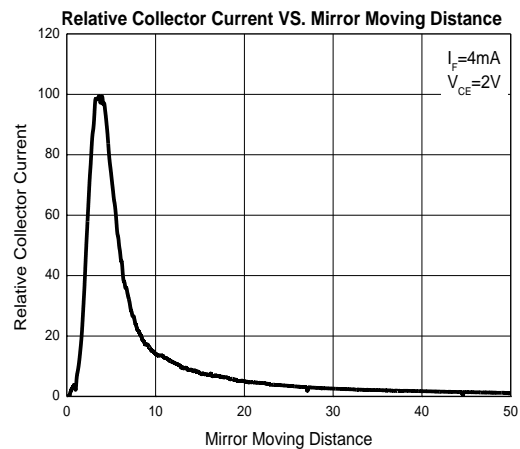


Forward Current V.S Ambient Temperature

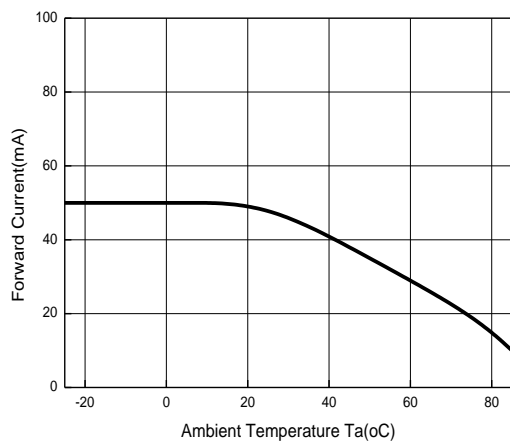


Power Dissipation vs. Ambient Temperature

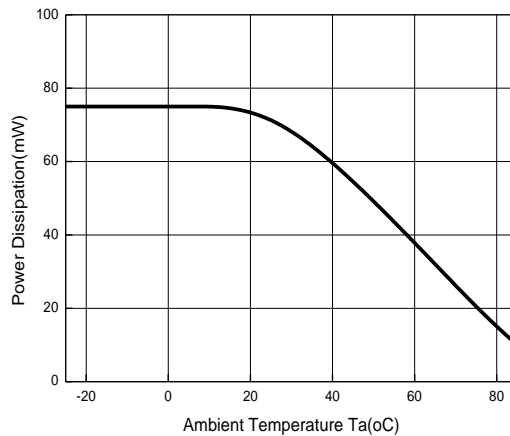



Collector Dark Current vs. Ambient Temperature

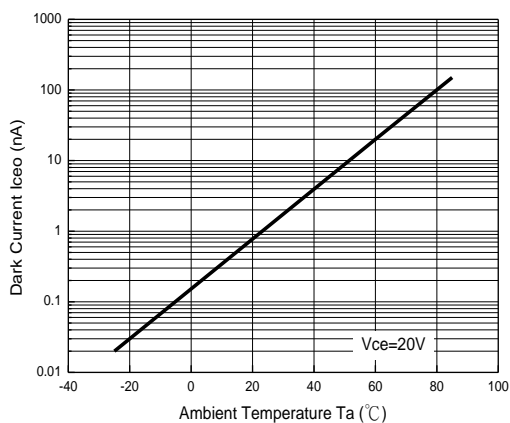





Wave length

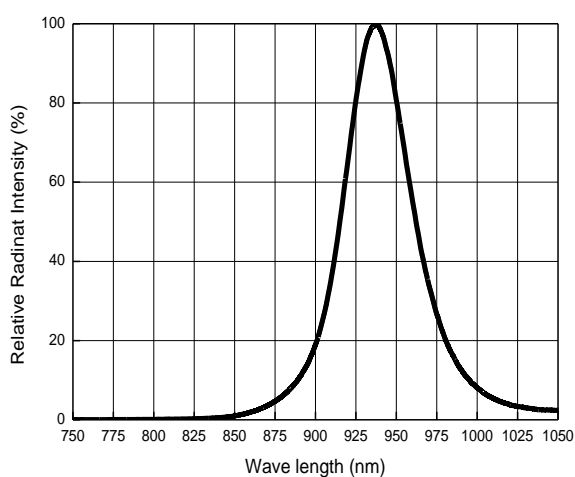


Measuring Circuit For Response Time

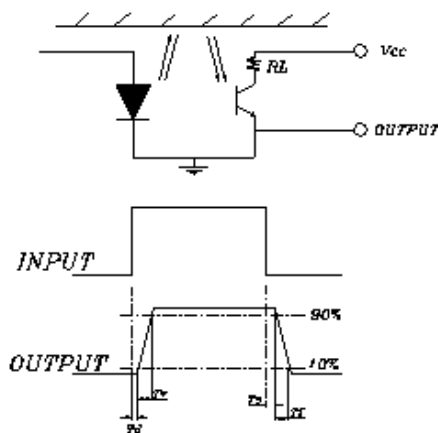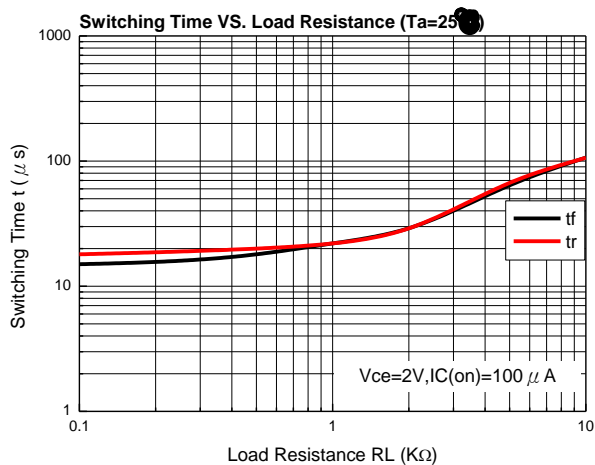



Test Condition and Arrangement for Collector Current

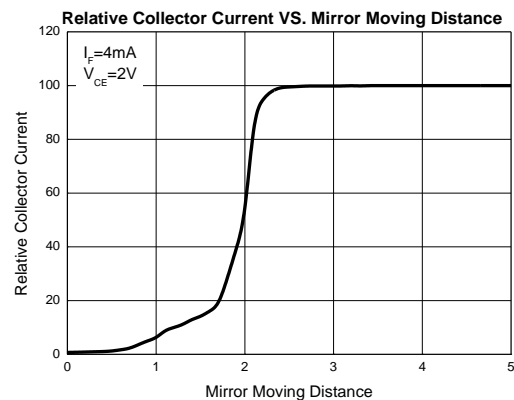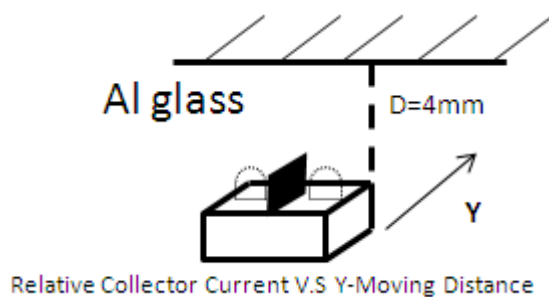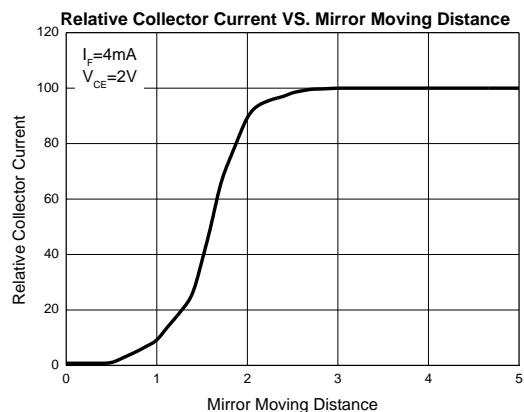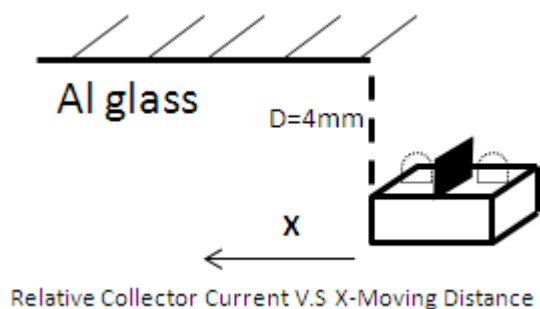

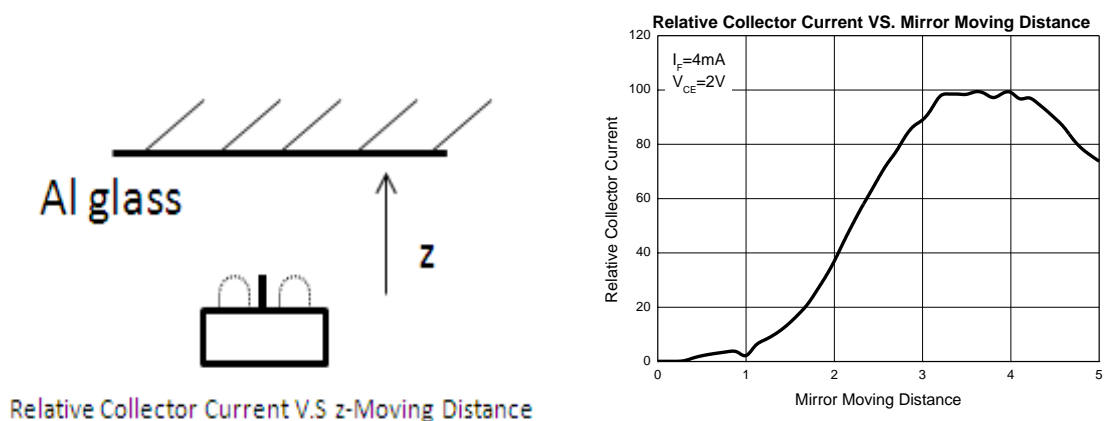

Recommended pattern




 area : Please do not apply the pattern wiring to avoid the possibility of short circuit.

Regarding amount of solder, if there is solder leakage in terminal wiring pattern between PCB and housing main body, the reliability will be deteriorated.


Please check the proper amount of solder in advance not to have solder leakage into terminal wiring pattern between PCB and housing main body.

Package specification

• Tape and Reel package

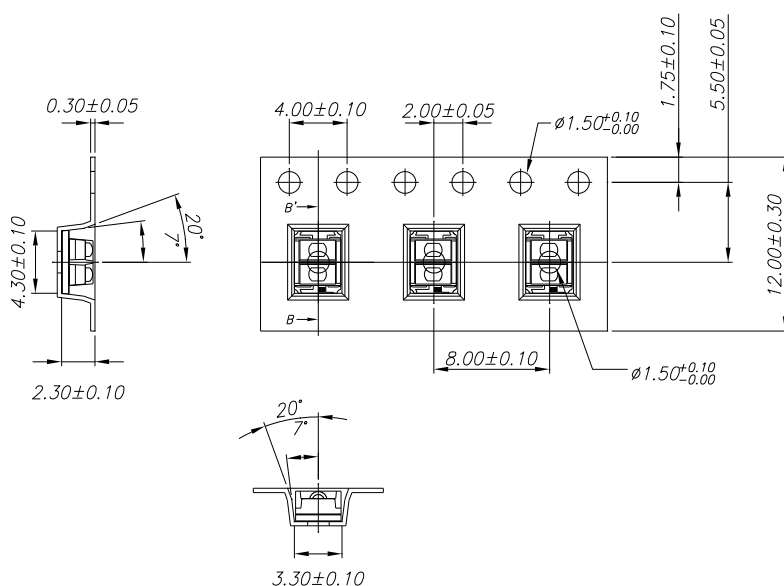

Reel Dimensions

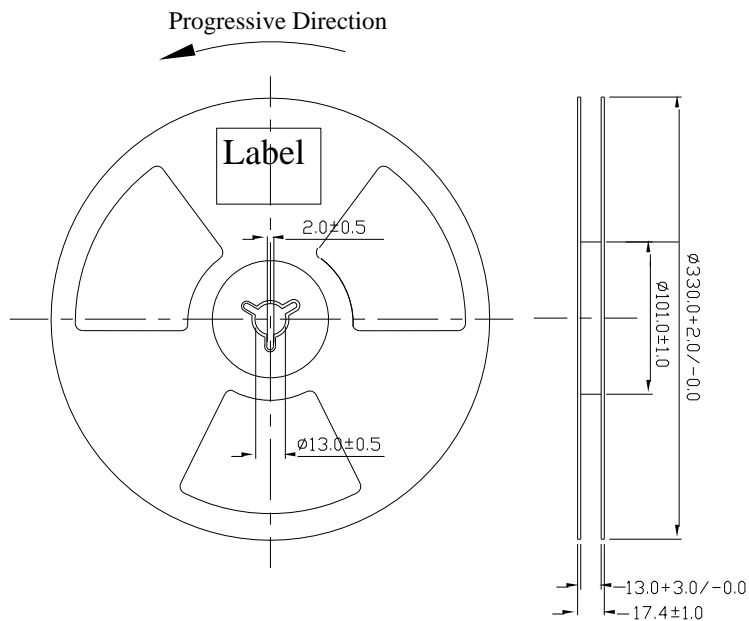


Note: The tolerances unless mentioned is $\pm 1.0\text{mm}$, Unit = mm


Packing Quantity Specification

- 800pcs / 1 Reel
- 38 Reels / 1 Carton

Packing Procedure

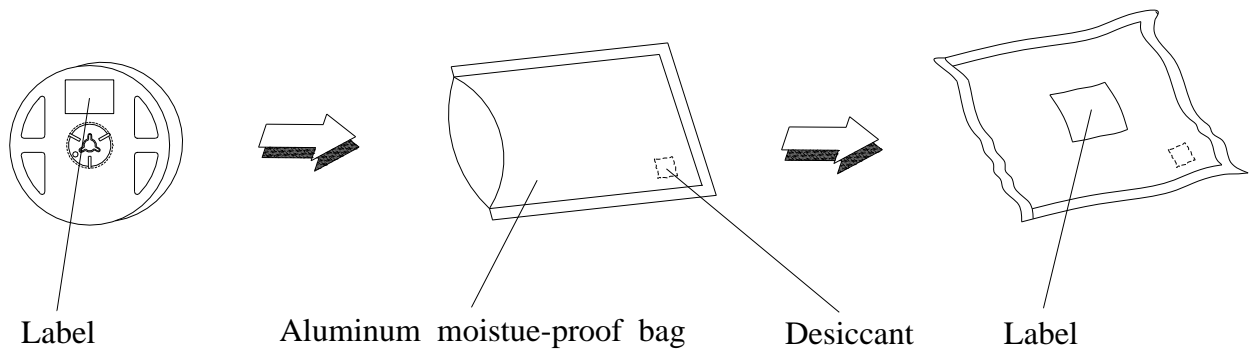

Outer Carton Dimension : 409mm(A)*245mm(B)*360mm(C)

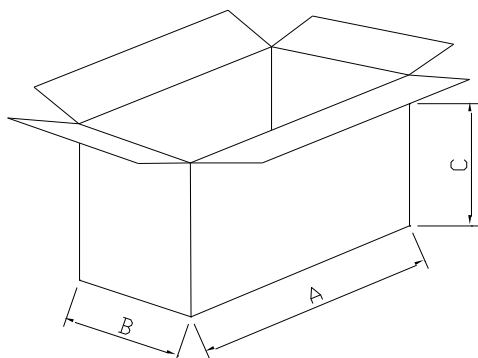

Recommended Method of Storage


The following are general recommendations for moisture sensitive level (MSL) 3 storage and use :

1. Storage

- 1.1 Do not open moisture proof bag before the products are ready to use.
- 1.2 Before opening the package, the device should be kept at 30°C or less and 90%RH or less.
- 1.3 The device should be used within a year.
- 1.4 After opening the package, the device should be kept at 30°C or less and 70%RH or less.
- 1.5 The device should be used within 168 hours (7 days) after opening the package.
- 1.6 If the moisture absorbent material (silica gel) has faded away or the device have exceeded the storage time, baking treatment should be performed using the following conditions.
Baking treatment : $60\pm5^{\circ}\text{C}$ for 24 hours.

2. Soldering Condition


a) Pb-free solder temperature profile

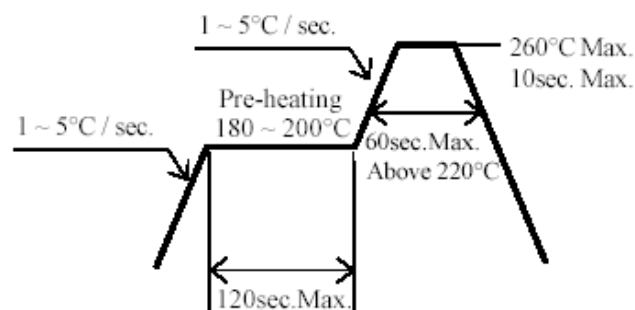

- b) Reflow soldering should not be done more than two times.
- c) When soldering, do not put stress on the LEDs during heating.
- d) After soldering, do not warp the circuit board.

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

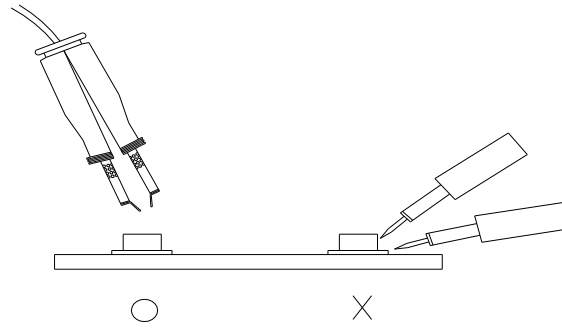

Notes

1. Above specification may be changed without notice. TONYU will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. TONYU assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of TONYU corporation. Please don't reproduce or cause anyone to reproduce them without TONYU's consent.