






PART NO. AND CH. CODE	△L ₄	H ₁	H ₂	W ₁	R ₁	W ₂	R ₂	WIRE SIZE (mm ²)
7116-4110-02.□	16.60	△(2.45)	△(3.55)	2.30	0.45	2.80	0.45	△0.3~0.6 OR EQUIVALENT
7116-4111-02.□	16.60	△(3.25)	△(4.45)	3.00	0.65	3.60	0.65	△0.75~1.25 OR EQUIVALENT
7116-4112-02.□	16.60	△(4.00)	△(5.50)	3.70	0.85	4.60	0.90	△1.5~3.0 OR EQUIVALENT
△ 7116-4113-02	18.50	(5.40)	(7.05)	4.90	1.10	6.50	1.50	3.0~5.0 OR EQUIVALENT

注 記

- △ 1. 嵌合相手品番: 7114-4110-02 ETC.
- △ 2. 7116-4113-02 についての通電流値は、2.5 mm²電線相当以下とする。
- △ 3. 7116-4113-02 に 5 mm²電線を圧着して使用する場合には、専用ハウジングが必要となります。

NOTES

- △ 1. MATING PART NO.: 7114-4110-02 ETC.
- △ 2. CURRENT FOR 7116-4113-02 SHALL BE THE
CURRENT FOR 2.5 mm² WIRE OR UNDER.
- △ 3. IN CASE 5 mm² WIRE IS CRIMPED WITH THE
TERMINAL 7116-4113-02, SPECIAL HOUSING
IS REQUIRED.

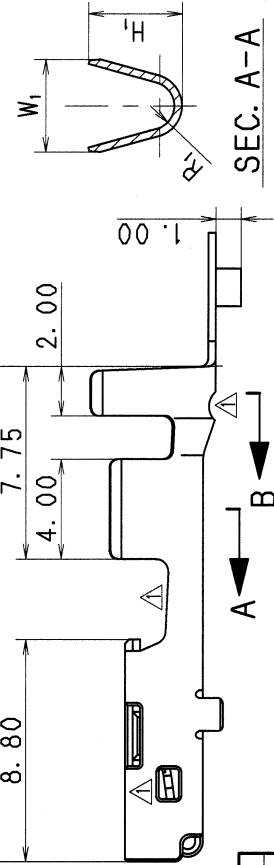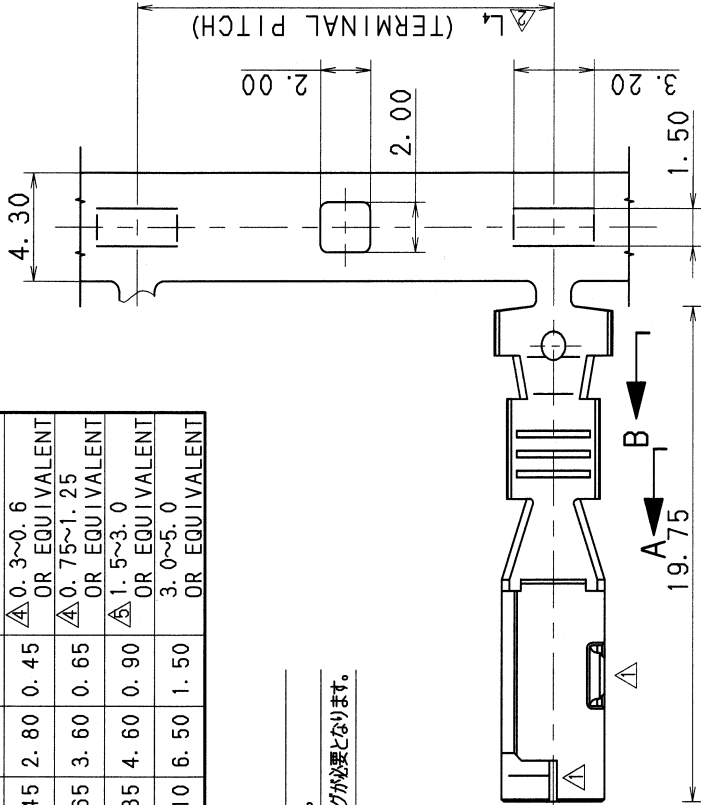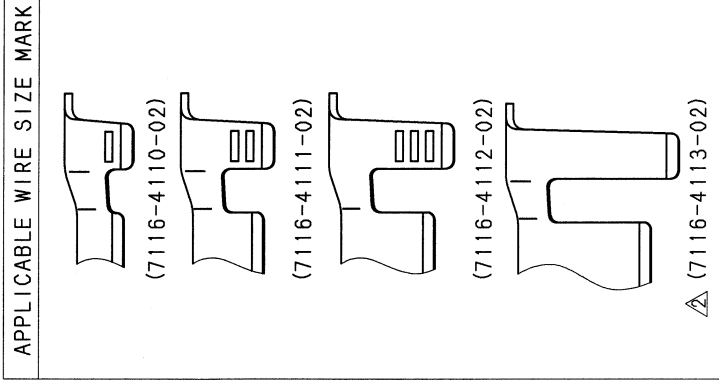

LET	DATE	REVISION RECORD	NO.	CHKD
10MAX	50MAX	100MAX	250MAX	2500VR
A	±0.15	±0.2	±0.3	±0.5
B	±0.2	±0.3	±0.55	±0.95
C	±0.3	±0.5	±0.8	±1.4
SPECIFIED				

	
CUSTOMER	CUSTOMER DWG NO.
CUSTOMER PART NO.	
OFFICE	TRIAL PART NO.
VENDOR	

MAT'L	COPPER ALLOY	t=0.3	TREAT.
SPEC.	(TIN PLATING)		& FIN.
NAME	2.8 SYSTEM CONNECTOR		
FEMALE TERMINAL			
PART NO.	7116-4110-02 ETC.		
CH. CODE	7116-4110-02:R		
DWG NO.	YAZAKI CORPORATION		

10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±30'	0.15
MASS						
9						

PART NO.	7116-4110-02 ETC.		
CH. CODE	7116-4110-02:R		
DWG NO.	YAZAKI CORPORATION		