


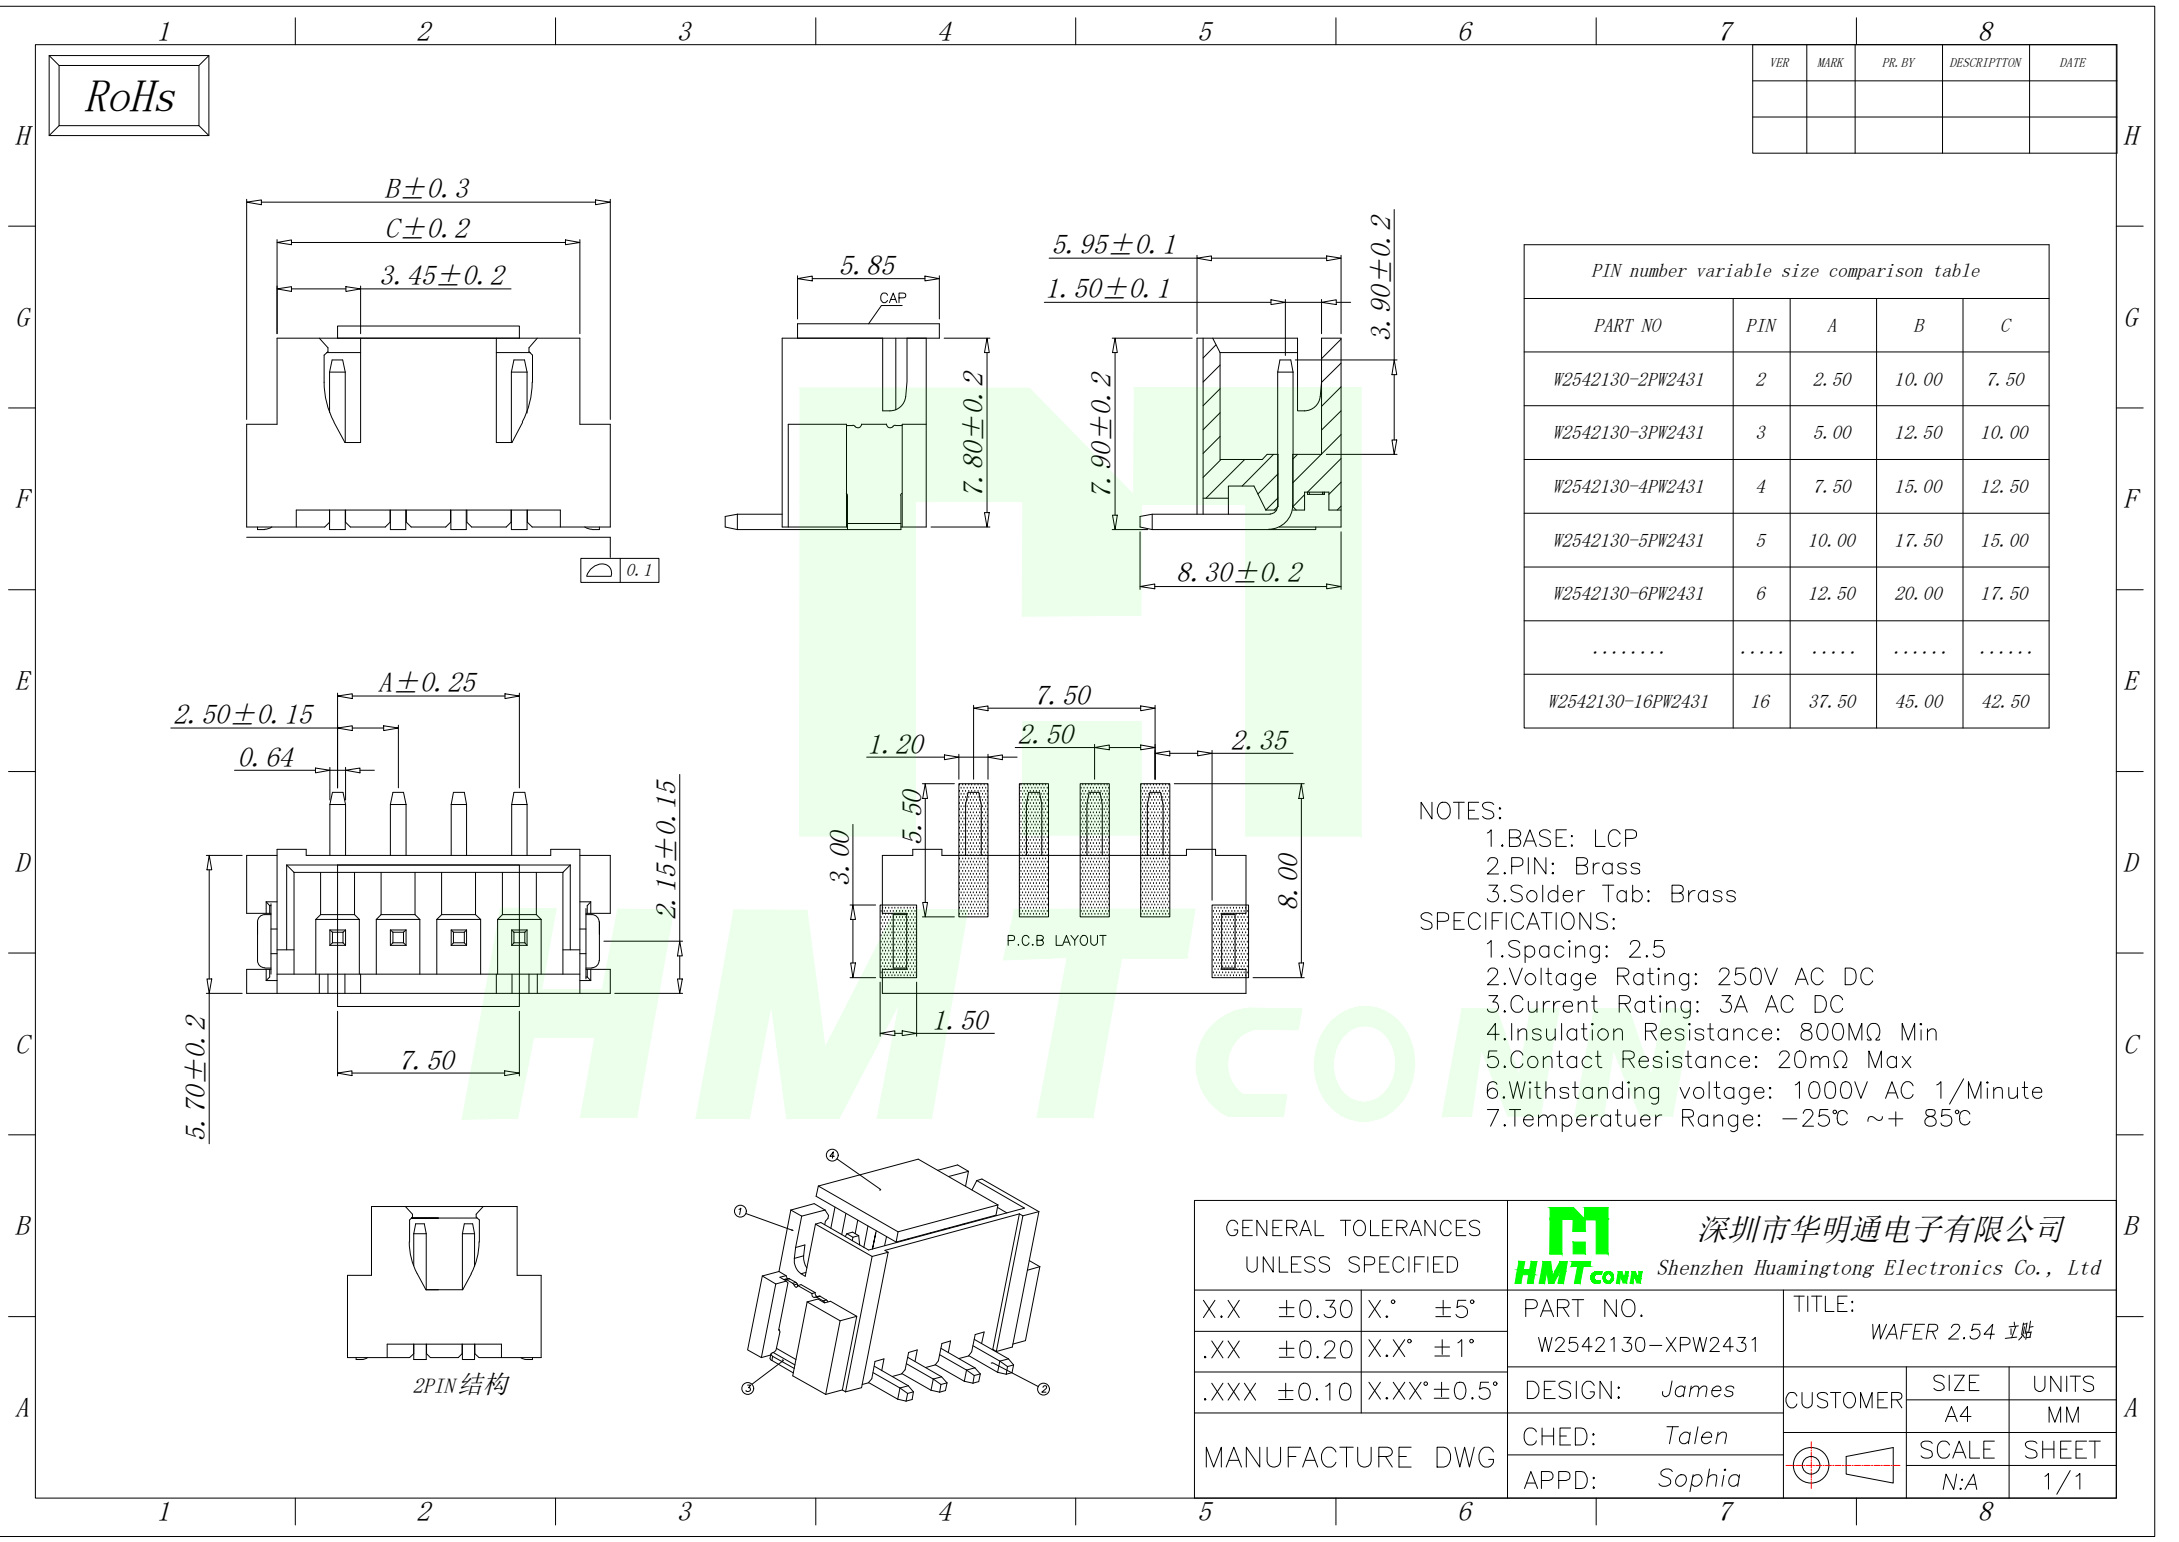



RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table				
PART NO	PIN	A	B	C
W2542130-2PW2431	2	2.50	10.00	7.50
W2542130-3PW2431	3	5.00	12.50	10.00
W2542130-4PW2431	4	7.50	15.00	12.50
W2542130-5PW2431	5	10.00	17.50	15.00
W2542130-6PW2431	6	12.50	20.00	17.50
.....				
W2542130-16PW2431	16	37.50	45.00	42.50

NOTES:
1.BASE: LCP
2.PIN: Brass
3.Solder Tab: Brass
SPECIFICATIONS:
1.Spacing: 2.5
2.Voltage Rating: 250V AC DC
3.Current Rating: 3A AC DC
4.Insulation Resistance: 800MΩ Min
5.Contact Resistance: 20mΩ Max
6.Withstanding voltage: 1000V AC 1/Minute
7.Temperatuer Range: -25℃ ~+ 85℃

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd	
X.X ±0.30	X.° ±5°	PART NO. W2542130-XPW2431	TITLE: WAFER 2.54 立贴
.XX ±0.20	X.X° ±1°	DESIGN: James	CUSTOMER
.XXX ±0.10	X.XX° ±0.5°	CHED: Talen	SIZE A4
MANUFACTURE DWG		APPD: Sophia	UNITS MM
			SCALE N:A
			SHEET 1/1



2PIN 结构

