



SPECIFICATIONS


- 50 Ohms BNC R/A PCB Mount Jack
1.Center Contact:Bronze,Gold Plated
2.Body:Zinc Alloy,Nickel Plated
3.Housing:PBT(UL 94V-0),White
4.Insulator:PE-606
5.Mounting Post:Bronze,Tin Plated
6.Solder Tail:Copper Wire,Tin Plated
7.Washer:Steel,Nickel Plated
8.Nut:Brass,Nickel Plated







Recommended Mounting Hole
Max. Panel Thickness: 5.5mm

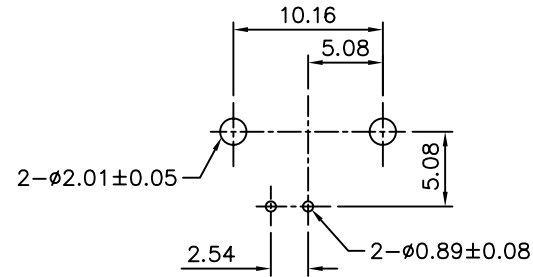

Recommended P.C.Board Layout Without Mounting Posts



Lock Washer

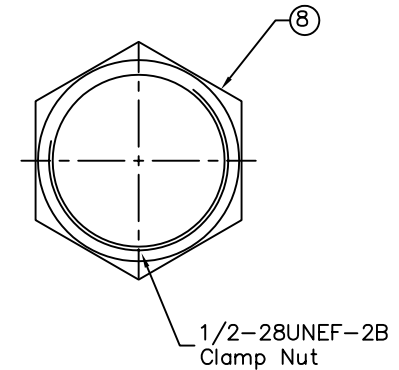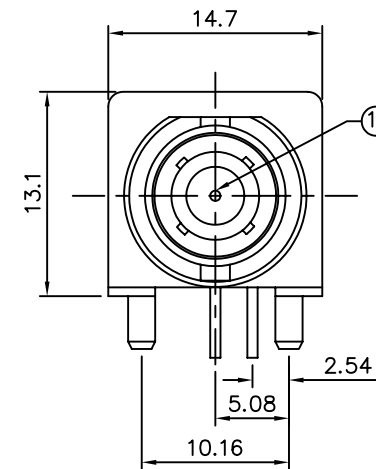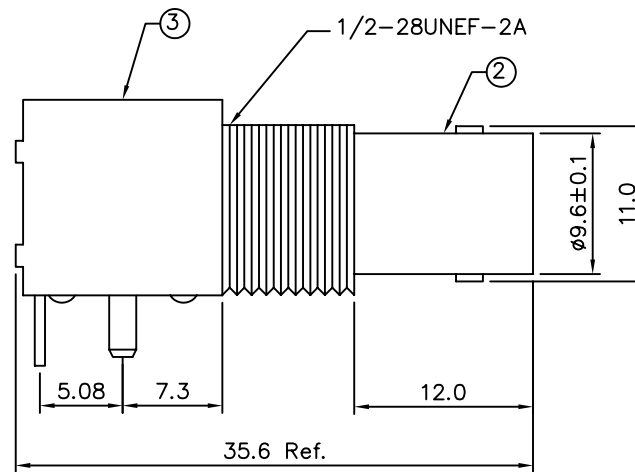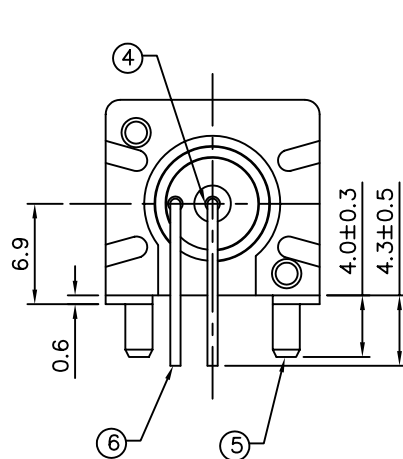

1/2-28UNEF-2B
Clamp Nut

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

06542

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

	X.	± 0.5
--	----	-----------

σ_x	± 0.3
σ_y	± 0.3
σ_z	± 0.3
σ_{xy}	± 0.3
σ_{yz}	± 0.3
σ_{zx}	± 0.3
τ_{xy}	± 0.3
τ_{yz}	± 0.3
τ_{zx}	± 0.3

.X	± 0.5
.XX	± 0.2

	UNIT
	mm



		B0
	NO.REV	

	NEW RELEASE
--	-------------

REVISIONS

BECKY

03/29/2006

CHK

DATE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SparkFun Electronics:](#)

[PRT-10550](#)