
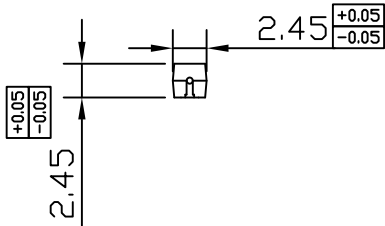



Unit:mm

客户



订购信息: Order Information

型号 Type	干簧管灵敏度 AT Range	触点方式 Contact Form
FRS-09A13SMDH0710		
		常开 (A)
注: 卷盘包装: 2500个/ 盘 2500pcs/reel		

卷盘包装尺寸

Dimensions for tape and reel

技术参数 SPECIFICATION				深圳市法思特传感器有限公司 SHENZHEN FAST SENSOR CO., LTD.		
开关触点	Contact Form		常开 (A)			
最大开关功率	Contact Rating - max.	W	10			
最大开关电压	Switching Voltage - max.	V	100			
最大开关电流	Switching Current - max.	A	0.5	TITLE 塑封贴片干簧管 Molded SMD Reed Switch		
最大载流电流	Carry Current - max.	A	0.5			
最大接触电阻	Contact Resistance - max.	mΩ	150			
最小击穿电压	Breakdown Voltage - min.	V	110/150	PART NO. FRS-09A13SMDH 系列		SCALE 2:1
绝缘电阻	Insulation Resistance - min.	MΩ	10000			REV. 00
工作温度	Operating Temperature	°C	-40~105	Drawn by ZXL / 2016-01-01	Reviewed by LJ / 2016-01-01	Approved by LY / 2016-01-01