

A

B

C

D

E

F

G

A

B




C

D




E

F



G

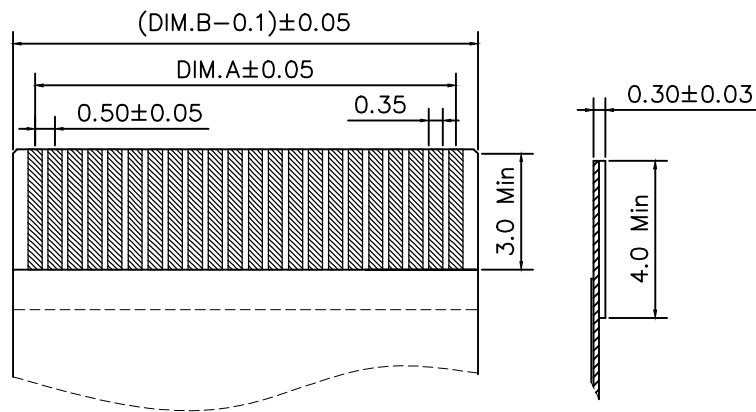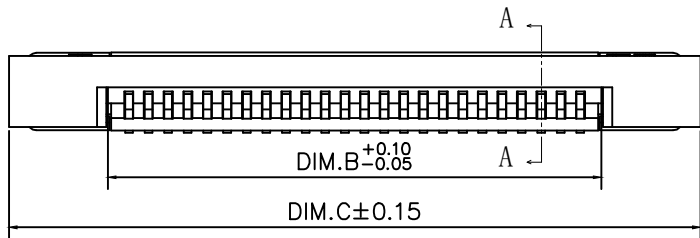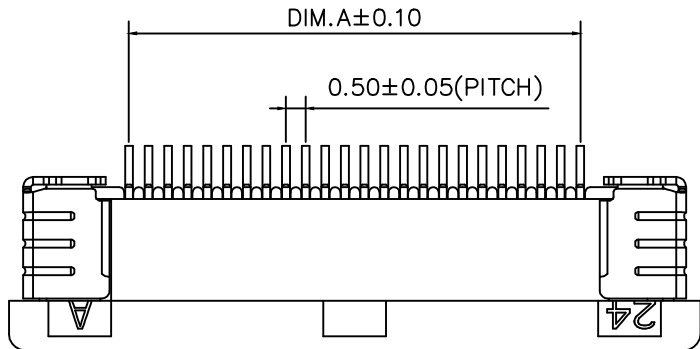

适用扁平线 (Applicable Flat Cable)

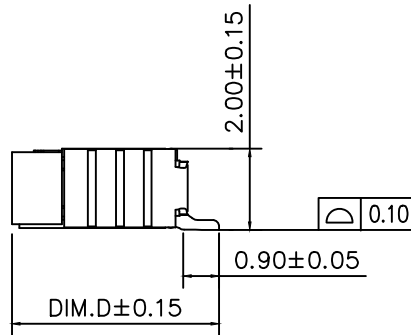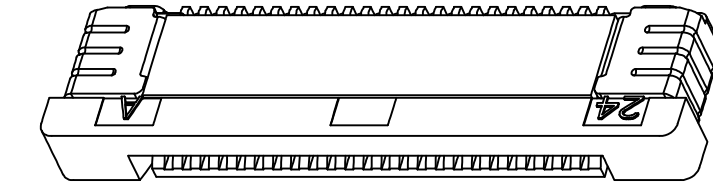

SECTION A-A

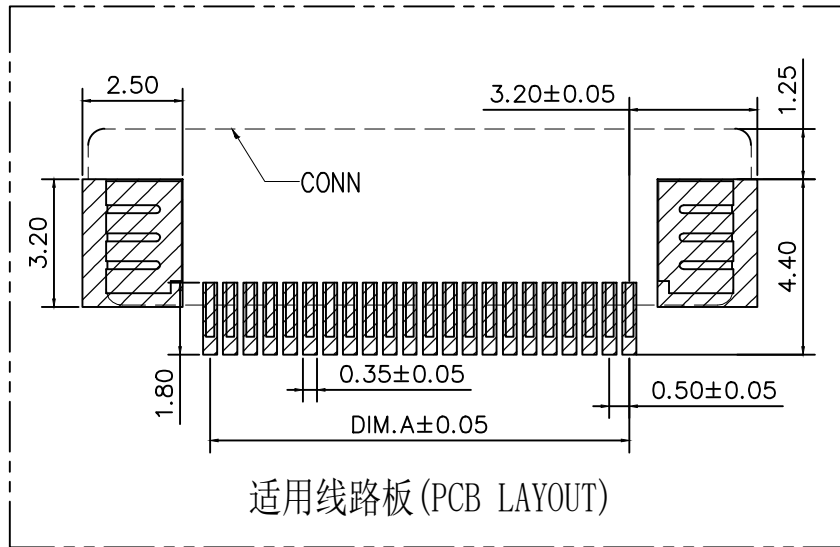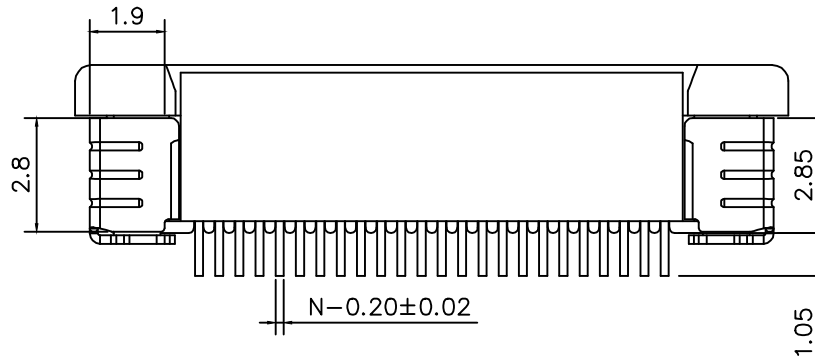

适用线路板 (PCB LAYOUT)

标 记 MARK		ECN编号/变更内容 ECN NO/DEFINITION				修 改 REVISE		日 期 DATE		核 准 APPROVE	
CKI	DIM A	DIM B	DIM C	DIM D		CKI	DIM A	DIM B	DIM C	DIM D	
4	1.50	2.56	7.60	5.20		34	16.50	17.56	22.60	5.20	
5	2.00	3.06	8.10	5.20		35	17.00	18.06	23.10	5.75	
6	2.50	3.56	8.60	5.20		36	17.50	18.56	23.60	5.75	
7	3.00	4.06	9.10	5.20		37	18.00	19.06	24.10	5.75	
8	3.50	4.56	9.60	5.20		38	18.50	19.56	24.60	5.75	
9	4.00	5.06	10.10	5.20		39	19.00	20.06	25.10	5.75	
10	4.50	5.56	10.60	5.20		40	19.50	20.56	25.60	5.75	
11	5.00	6.06	11.10	5.20		41	20.00	21.06	26.10	5.75	
12	5.50	6.56	11.60	5.20		42	20.50	21.56	26.60	5.75	
13	6.00	7.06	12.10	5.20		43	21.00	22.06	27.10	5.75	
14	6.50	7.56	12.60	5.20		44	21.50	22.56	27.60	5.75	
15	7.00	8.06	13.10	5.20		45	22.00	23.06	28.10	5.75	
16	7.50	8.56	13.60	5.20		46	22.50	23.56	28.60	5.75	
17	8.00	9.06	14.10	5.20		47	23.00	24.06	29.10	5.75	
18	8.50	9.56	14.60	5.20		48	23.50	24.56	29.60	5.75	
19	9.00	10.06	15.10	5.20		49	24.00	25.06	30.10	5.75	
20	9.50	10.56	15.60	5.20		50	24.50	25.56	30.60	5.75	
21	10.00	11.06	16.10	5.20		51	25.00	26.06	31.10	5.75	
22	10.50	11.56	16.60	5.20		52	25.50	26.56	31.60	5.75	
23	11.00	12.06	17.10	5.20		53	26.00	27.06	32.10	5.75	
24	11.50	12.56	17.60	5.20		54	26.50	27.56	32.60	5.75	
25	12.00	13.06	18.10	5.20		55	27.00	28.06	33.10	5.75	
26	12.50	13.56	18.60	5.20		56	27.50	28.56	33.60	5.75	
27	13.00	14.06	19.10	5.20		57	28.00	29.06	34.10	5.75	
28	13.50	14.56	19.60	5.20		58	28.50	29.56	34.60	5.75	
29	14.00	15.06	20.10	5.20		59	29.00	30.06	35.10	5.75	
30	14.50	15.56	20.60	5.20		60	29.50	30.56	35.60	5.75	
31	15.00	16.06	21.10	5.20		61	30.00	31.06	36.10	5.75	
32	15.50	16.56	21.60	5.20		64	31.50	32.56	37.60	5.75	
33	16.00	17.06	22.10	5.20		65	32.00	33.06	38.10	5.75	

技术指标:

1. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$
2. 额定电压: 50V, AC/DC (等效)
3. 接触电阻: $\leq 0.03\Omega$
4. 绝缘电阻: $\geq 500\text{M}\Omega$

2	端子	铜	镀锡	
1	胶芯	LCP	本色	
序号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE	FPC座	
			料 号 PART NO	HC-FPC-0.5-20P-CXH20	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1		
X. ± 0.50 .XX ± 0.10		单 位 UNIT	MM	制 图 DRAW	AhYe
.X ± 0.20 .XXX ± 0.05		张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
ANGLES $\pm 1^{\circ}$		版 本 REV	A	批 准 APPROVE	赵亮亮

