
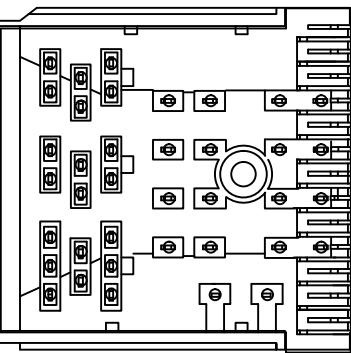
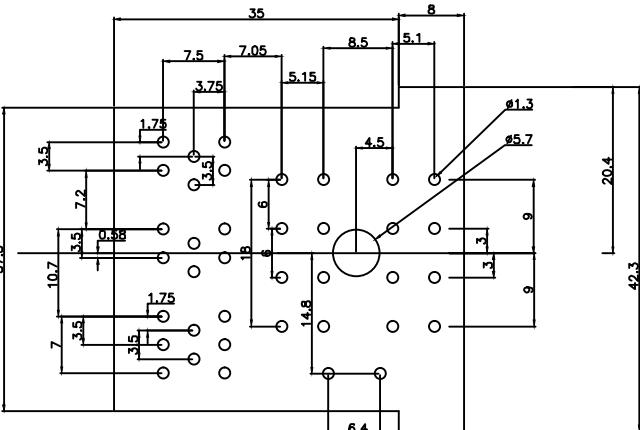
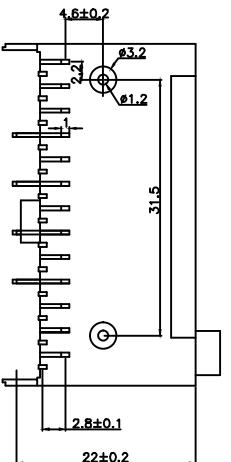
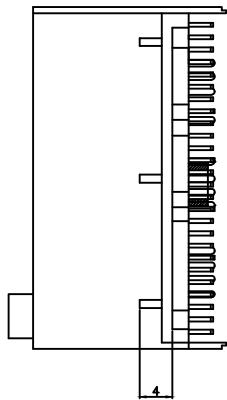
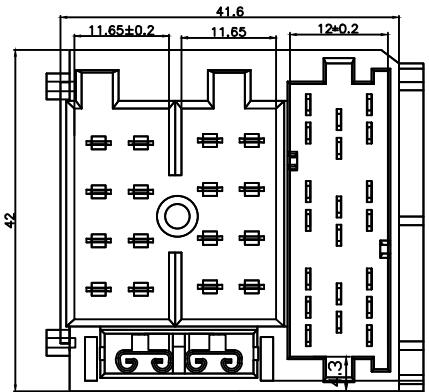


REVISIONS

LTR	DESCRIPTION	DATE	REVISED	APPROVED

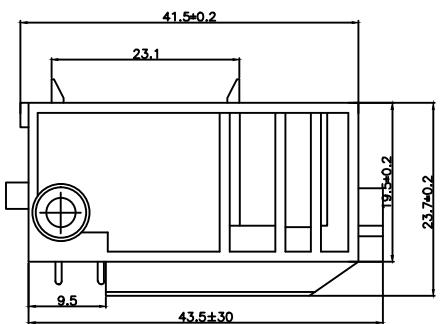

技术参数

- 未注公差尺寸按(GB/T14486-2008-MT-B)制定;
- 表面光滑、无损伤、无缺料;
- 接插件针与塑料件保持力≥3KG;
- 额定电压: 250V
- 额定电流: 10A
- 接触电阻: 0.03欧
- 绝缘电阻: 1000兆欧
- 寿命: 10000次

GENERAL TOLERANCES
(UNLESS SPECIFIED)

X° ±3°
.X ±0.3 .X° ±2°
.XX° ±1°

CUSTOMER

3	TERMINAL(2)	20	ALLOY	MB: Sn PLATED
2	TERMINAL(1)	16	ALLOY	MB: Sn PLATED
1	HOUSING	1	PA66-G30	BLACK
LTR	PART NAME	QTY	MATERIAL	REMARK
DRA	Sam Chen	DATE	2021.10.18	 NAME PART NO. YF-1S0-36P-A 前部无针 CUSTOMER NO.
CHK	Sam Chen	DATE	2021.10.18	
APR	JJ Xie	DATE	2021.10.18	
SIZE: A4	REV. A	SHEET. 1/1	SCALE. 10:1	UNIT: mm
广东富盈兴业精密科技实业有限公司				