


CORE DIMENSIONS:

A	16.00 [.630]	+	0.30 [.012]
B	9.00 [.354]	+	0.30 [.012]
C	28.00 [1.102]	+	0.50 [.020]
		-	0.30 [.012]
D	7.50 [.295]	+	0.20 [.008]
E	5.60 [.220]	+	0.30 [.012]


RoHS

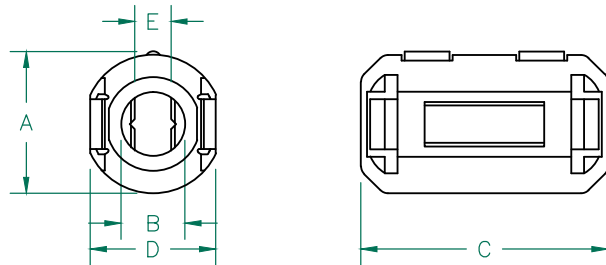

CASE DIMENSIONS:

A	19.70 [.776]	+	REF.
B	9.00 [.354]	+	REF.
C	35.10 [1.382]	+	REF.
D	18.00 [.709]	+	REF.
E	5.38 [.212]	+	REF.

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	88 Ω	200 Ω	260 Ω
Minimum	- Ω	176 Ω	- Ω

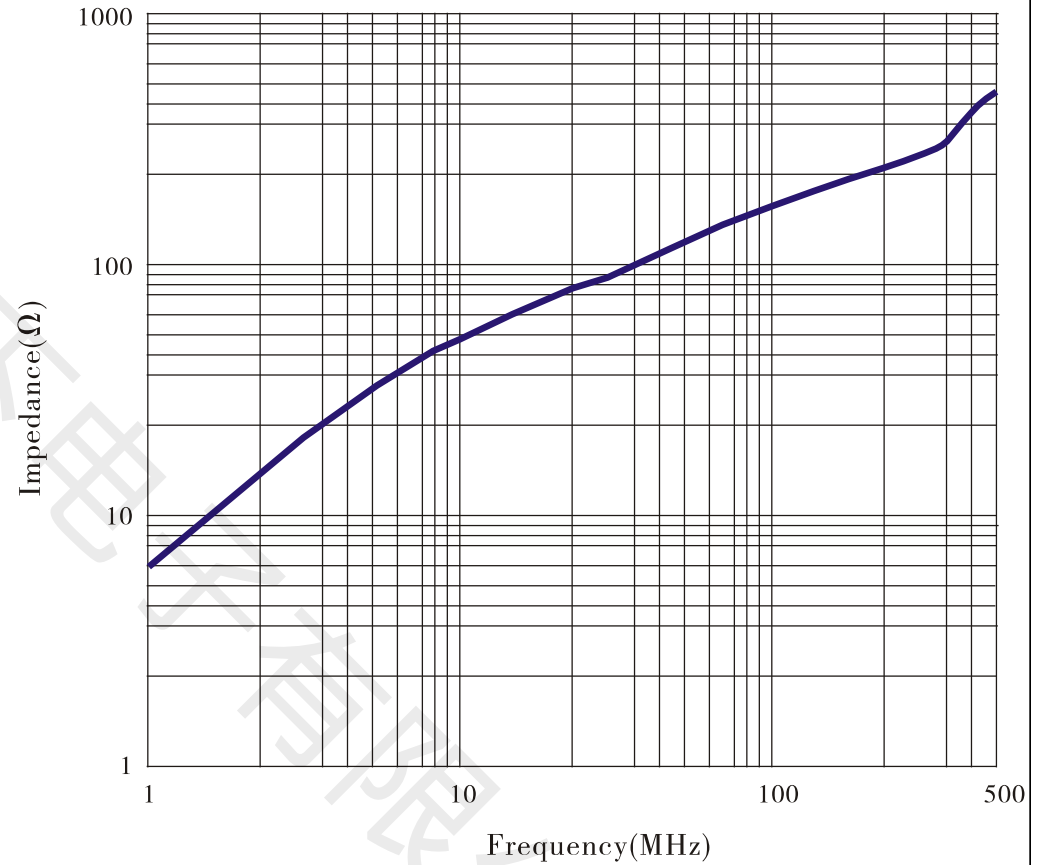

深圳市韩下电子有限公司

HX 2035-0930A-BK-90B

Drawn: 黄彬

Check: 张伟

Approved: 罗小春





深圳市韩下电子有限公司

Shenzhen Hanxia Electronic Co., Ltd

Tel: 0755-33819206 Fax: 0755-27597491

承 认 书

SPECIFICATION FOR APPROVAL

客 户 Customer:

产品名称 Project:

磁环

规格型号 Part No:

HX 2035-0930A-BK-90B

贵公司承认印 Approval signatures

料 号/Part No.	签 章/Signatures

日期 Date:

拟制/Drawn	黄彬	
审核/Check	张伟	
批准/Approved	罗小春	