

1

2

3

4


5

6

7


8

Mark	Qty	Engineering Change Area



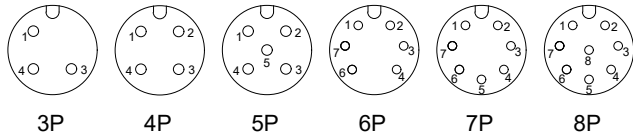


A-CODE FEMALE INTERFACE

POLE	03	04	05	06	07	08
CONDUCTOR CROSS-SECTION	20~24AWG 0.5~0.25mm ²	20~24AWG 0.5~0.25mm ²	20~24AWG 0.5~0.25mm ²	24AWG 0.25mm ²	24AWG 0.25mm ²	24AWG 0.25mm ²
RATED VOLTAGE	250V	250V	60V	30V	30V	30V
RATED CURRENT	4A	4A	4A	2A	2A	2A
RATED IMPULSE VOLTAGE	2.5KV	2.5KV	1.5KV	0.8KV	0.8KV	0.8KV

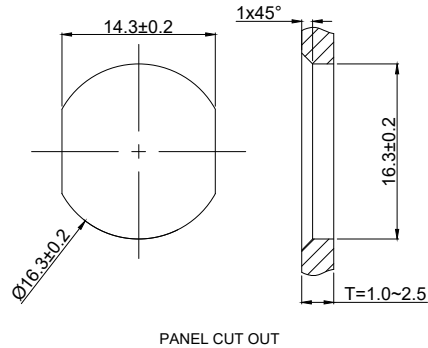

PANEL CUT OUT

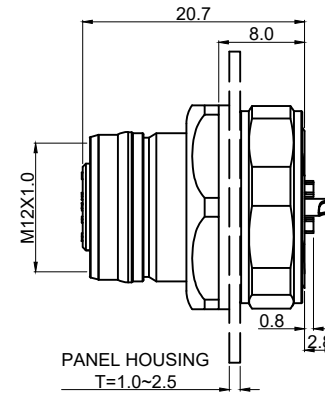

NOTE:

1. ELECTRICAL:

1.1.CONTACT RESISTANCE:≤15mΩ

1.2.INSULATION RESISTANCE:≥100MΩ

2. ENVIRONMENTAL:

2.1.OPERATING TEMPERATURE: -25°C TO +85°C

2.2..PROTECTION GRADE:IP67,WHEN TIGHT LOCKED

2.3.POLLUTION DEGREE:3

3.CONTACT MATERIAL: BRASS NI PLATED UNDER GOLD PLATED


4.CONFORM TO IEC 61076-2-101

* UNLESS OTHERWISE SPECIFIED
TOLERANCES ON DECIMAL IS:

X. ± 0.50 X° ± 2°

X.X ± 0.30

X.XX ± 0.20

All dimensions
are in mm

Material:

Finishing:

Phase Marking

Weight

Scale

拓宜(上海)工控电器设备有限公司
Topone(Shanghai) Industrial Control Electrical Equipment Co., LTD.Part Name:
C12B-FSA-RM1-5SCUPRev.
01Page:
1 OF 1

	Signature	Date
Created by		
Checked by		
Approved by		
State	First Release	

P/N	61030007
MD/CD	

A

B

C

D

A

B

C

D

1

2

3

4

5

6

7

8