
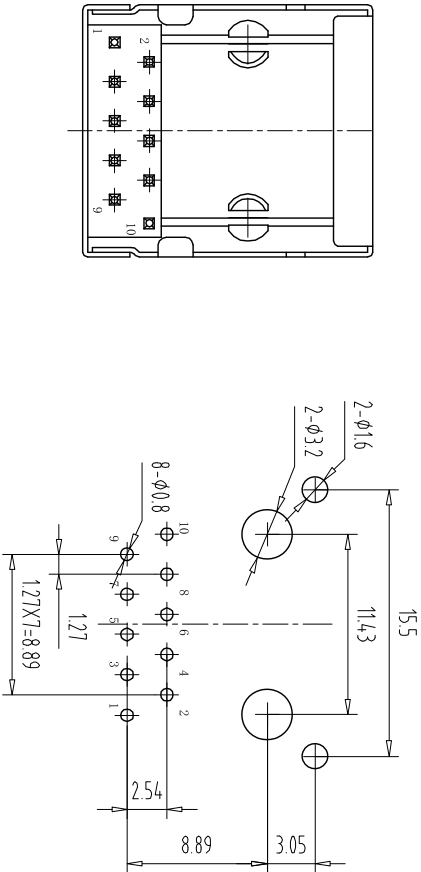
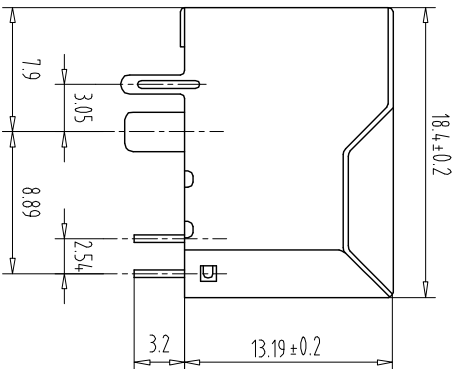


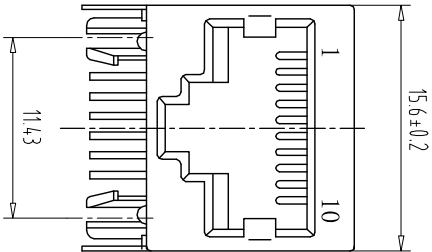

NOTES:

MATERIAL :

- 1.HOUSING MATERIAL
 - 2.CONTACT MATERIAL
 - 3.PLATING
 - 4.SHIELD
- GLASS FILLED POLYESTER UL94V-0
PHOSPHOR BRONZE $\phi 0.45\text{mm}$
GOLD PLATING OVER NICKEL
0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED

ELECTRICAL:

- 1.VOLTAGE RATING
 - 2.CURRENT RATING
 - 3.CONTACT RESISTANCE
 - 4.INSULATION RESISTANCE
 - 5.DIELECTRIC WITHSTANDING RESISTANCE
- 125 VAC RMS
15 AMP.
30 MILLION Ω S MAX.
500 MEGOHMS MIN @ 500V DC.
1000V AC RMS 50Hz MIN.

MECHANICAL:

- 1.DURABILITY
 - 2.PCB RETENTION PRE-SOLDER
- 750 CYCLES MIN.
1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE
 - 2.OPERATION
- 40 $^{\circ}$ ~-+85 $^{\circ}$
-40 $^{\circ}$ ~-+85 $^{\circ}$

PC Board Layout

Component Side Shown

TOLERANCE TABLE

.0	± 0.30
.00	± 0.20
.000	± 0.05

APPROVED:	DATE:	TITLE:			
CHECKED:	DATE:	R-J45-10P/8C 56A TAB-Down 弯插			
DRAWN:	DATE:	带屏蔽 无灯 无弹片 脚前3.05			
DATE:	DATE:	R-J45R10P-B000			

DATE:	DATE:	R-J45R10P-B000			
DATE:	DATE:	R-J45R10P-B000			
DATE:	DATE:	R-J45R10P-B000			
DATE:	DATE:	R-J45R10P-B000			

深圳市灿科盟实业有限公司
CHANKLEMENT INDUSTRYCO., LTD

带屏蔽 无灯 无弹片 脚前3.05

PART. NO.	UNIT	mm	SCALE	free	REV.	A	HY04
FILE NO.	Ckmtw-RJ45-0068						