


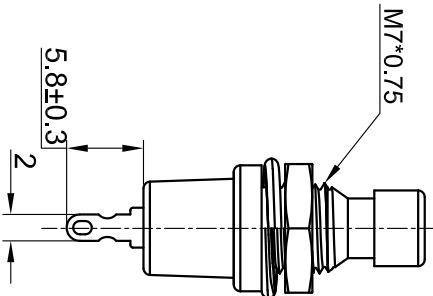


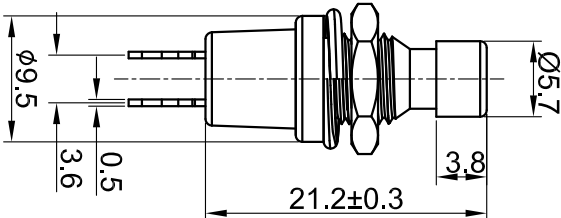

PB-05B




SWITCHING CIRCUIT

Panel Thickness:3mm MAX.

Rating: 3A 125V AC
Contact Resistance: 50mΩ Max
Insulation Resistance:DC 500V 100MΩ Min
Dielectric Strength:AC 1000V1minute
Total travel:1.4±0.4mm
Operating Life:10,000 cycles
Operating Temperature:0°C~85°C
Function:OFF-(ON)

MATERIAL

Base:Brass,Ni plated;
Cap:ABS;
Terminal: Copper,silver or Tin plated;
Nut: Brass,Ni plated.



CUT-OUT

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

		公差 TOLERANCES		.X±0.3 .XX±0.15		角度		± 1°		單位 DIMENSION UNIT		mm.	
		版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.07.15			品名 TITLE		图 号 DRAWING NO	
		核准		核对	Z. H. B.	绘图 DRAWN BY	HXG			PB-05B-B		PB-05B-B_A1	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY								