
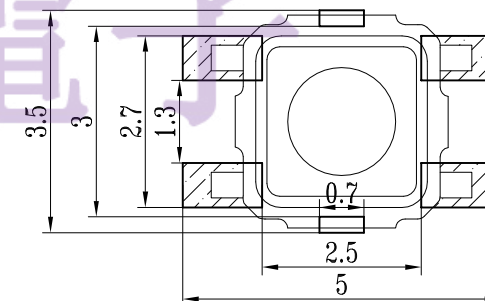
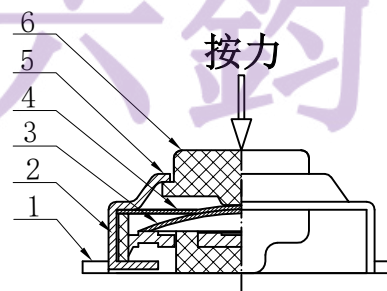


[illegible]

- 1.Rating : DC12V 50mA.
- 2.Contact resistance: $\leq 100m\Omega$.
- 3.Insulation resistance: $\geq 100M\Omega$ (DC100V).
- 4.Withstanding voltage: 250VAC .
- 5.Operating Force: $160\pm 50gf$
- 6.Travel: $0.15\pm 0.1mm$.
- 7.Life test: 100,000 cycles.
- 8.Operation temperature range: $-25^{\circ}C\sim 85^{\circ}C$.

高度	PCS/
H=1.5mm	4000
H=1.6mm	4000
H=1.7mm	4000
H=2.0mm	3000
H=2.5mm	3000

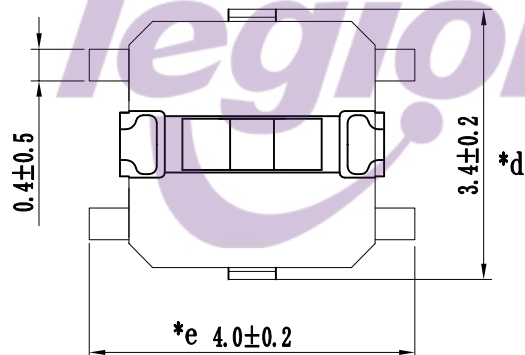

P.C.B LAYOUT

					TOLERANCE UNLESS SPECIFIED		A3	2024.6.26	变更BOM表用量 $\triangle 3$			YKH		
							A2	2024.4.12	更正行程为0.15 $\triangle 2$			MLQ		
6	STEM	LCP	1	WHITE/BLACK	<1.5: $\pm 0.1\text{mm}$ >1.5~5.0: $\pm 0.25\text{mm}$ >5.0: $\pm 0.3\text{mm}$	ANGULAR $\pm 1^\circ$	A1	2021.5.18	更新图纸			WM		
5	COVER	SUS	1				NO	DATE	REVISIONS			BY	APPD	
4	WATERPROOF MEMBRANE	PI	1	YELLOW	TITLE: TACT SWITCH				UNIT : MM	ROHS	DWN			
3	CONTACT	SUS	$\triangle 3$ 2	Ag-Plated	MODEL: TS-1177-C-01				SCALE: 1:1	COMPLIANT	CHK'D			
2	CASE	LCP	1	BLACK	东莞市六钧电子五金有限公司						APPD			
1	TERMINAL	PHOSPHOR BRONZE	4	Ag-Plated										
NO.	PART NAME	MATERIAL	QTY	FINISHING										