



3.4A,40V Synchronous Rectifier

Description

NDP7834KC is a synchronous rectifier for switch mode power supplies, which combines an N-Channel MOSFET and a driver circuit designed for synchronous rectification in DCM and QR operation.

The synchronous rectification can effectively reduce the secondary side rectifier power dissipation and provide high performance solution. By sensing MOSFET SW-to-source voltage, NDP7834KC can output ideal drive signal with less external components. It can provide high performance solution for 5V output voltage application.


Features

- Supports DCM and Quasi-Resonant Topologies
- Supports Low-side Rectification
- Max 85kHz Switching Frequency
- Fast Turn-off Total Delay of 30ns
- Compatible with Energy Star
- ~150uA Low Quiescent Current
- Available in SOP8 Package

Applications

- Chargers for Cell Phones
- AC/DC adapter
- Industrial Power Systems
- Flyback Converters

Typical Application

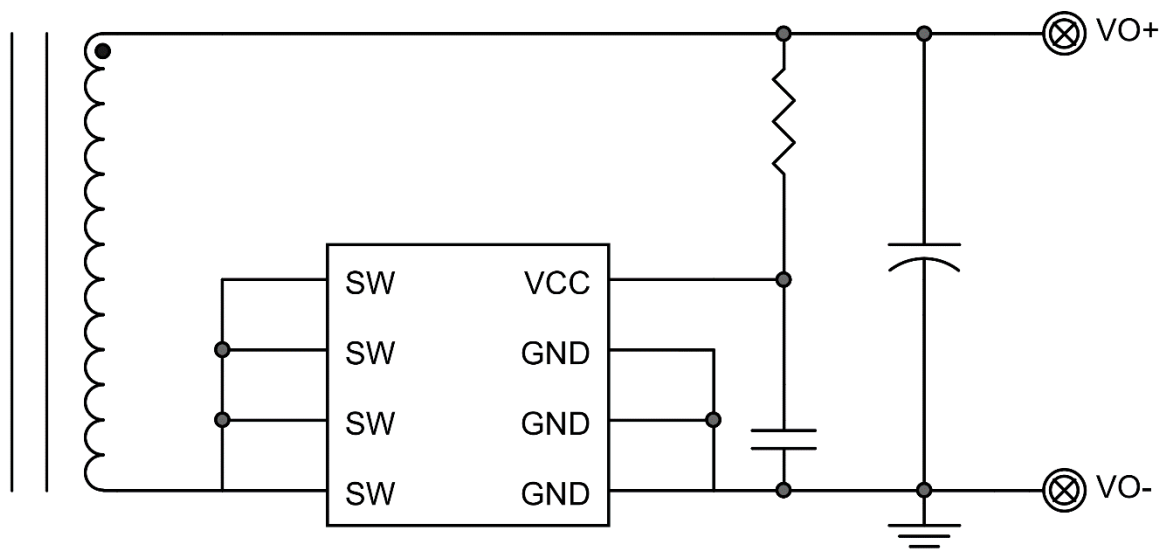




Absolute Maximum Ratings (at TA = 25°C)

Characteristics	Symbol	Rating	Unit
VCC to GND		-0.3 to 6.5	V
SW to GND		-0.3 to 45	V
Operating Junction Temperature		-40 to 150	°C
Storage Junction Temperature		-55 to 150	°C
Thermal Resistance from Junction to case	θ_{JC}	80	°C/W
Thermal Resistance from Junction to ambient	θ_{JA}	160	°C/W

Pin Function And Descriptions

PIN	NAME	Description
1,2,3	GND	Ground
4	VCC	Power supply
5,6,7,8	SW	Drain of internal N-MOS



Order information

Order Information	Top Marking
NDP7834 K C Pin NO. C:8 Package K: SOP Product Number	DY: Year (D8=2018,D9=2019,...) WW: Weekly (01-53) X : Internal ID Code




Electrical Characteristics

T_J = 25°C. V_{CC} = 5V, unless otherwise noted

Characteristics	Symbol	Conditions	Min	Typ	Max	Units
Input Voltage	V _{CC}		3.6	-	6.0	V
UVLO Voltage	V _{UVLO}			2.3		V
UVLO Hysteresis				0.2		V
V _{CC} voltage clamp	V _{ovp}			6.2		V
Quiescent Current	I _{CCQ}	no switch	-	150	-	uA
Turn on Threshold	V _{TH_ON}			-170		mV
Driver Voltage Regulator	V _{reg}			-37		mV
Turn OFF Threshold	V _{TH_OFF}			-20		mV
Turn-off Total Delay	T _{off_delay}			30		nS
Minimum on time	T _{min}			1.7		uS
NMOS R _{DS(on)}	R _{DS}			9		mΩ
Breakdown Voltage	BVDSS		40			V
Thermal shutdown Temp	T _{SD}		-	150	-	°C
Thermal Shutdown Hysteresis	T _{SH}		-	30	-	°C

Block Diagram

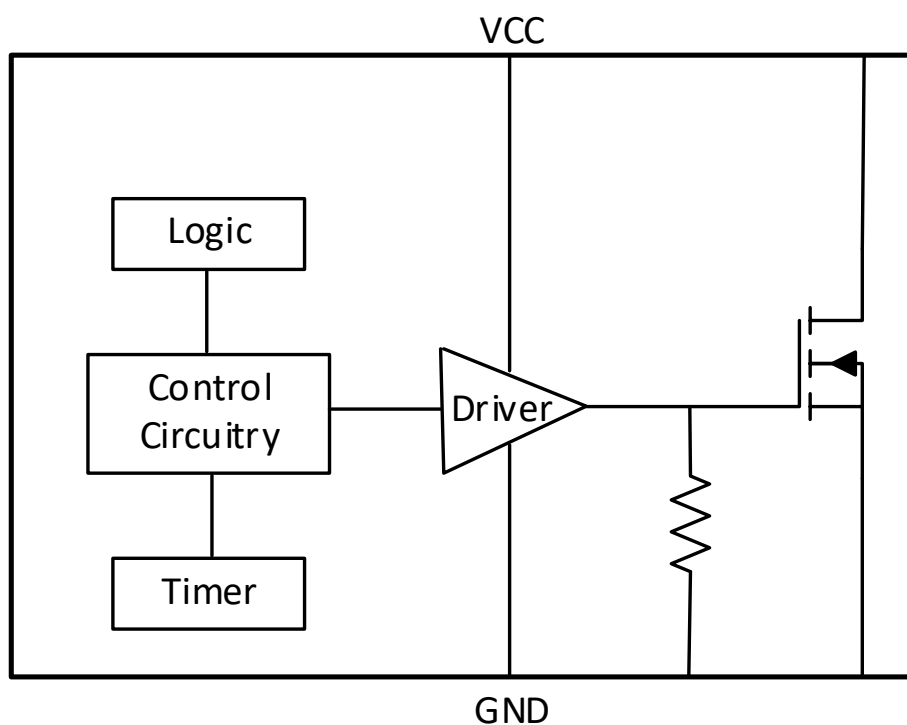



Operation

The NDP7834KC supports operation in DCM and Quasi-Resonant topologies. Operating in either a DCM or Quasi-Resonant topology, the control circuitry controls the gate in forward mode and will turn the gate off when the MOSFET current is fairly low.

VCC Under voltage lockout(UVLO)

When the Vcc is below UVLO threshold, the part is in sleep mode and the internal N-MOS will be turn off.

Turn ON phase

When the synchronous MOSFET is conducting, current will flow through its body diode which generates a negative Vds across it. Because this body diode voltage drop is much smaller than the turn on threshold of the control circuitry (-170mV), which will then turn on the N-MOS.

Conducting Phase

When the synchronous N-MOS is turned on, Vds becomes to rise according to its on resistance, as the current become smaller Vds rises above the Driver Voltage Regulator (-37mV), the circuitry starts pulling down the gate driver which leads to the VDS be regulated to a fixed voltage (the internal reference).

Turn OFF phase

When the Vds rises to trigger the turn off threshold(-20mV), the N-MOS gate voltage is

pulled to low after about 30nS delay by the control circuitry, a 1.7uS blanking time is added after the synchronous N-MOS is turn off to avoid error trigger because of the ringing.

Blanking

The NDP7834KC control circuitry contains a blanking function. When it pulls the MOSFET OFF, it makes sure that the OFF state at least lasts for about ~1.7us, so it is not recommended to set the synchronous period less than 1.6us in flyback converter, otherwise shoot through may occur During normal operation.

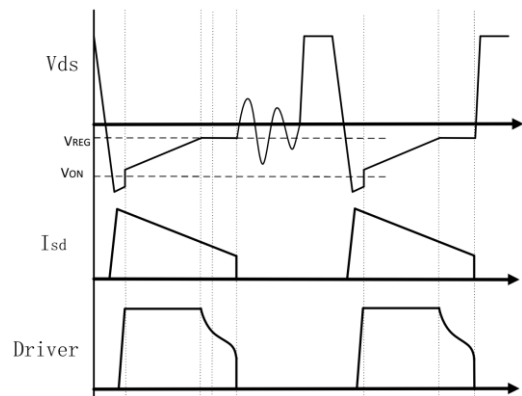



Figure 1

Operation in DCM mode



Package Description

8-Lead Standard Small Outline Package [SOP-8]

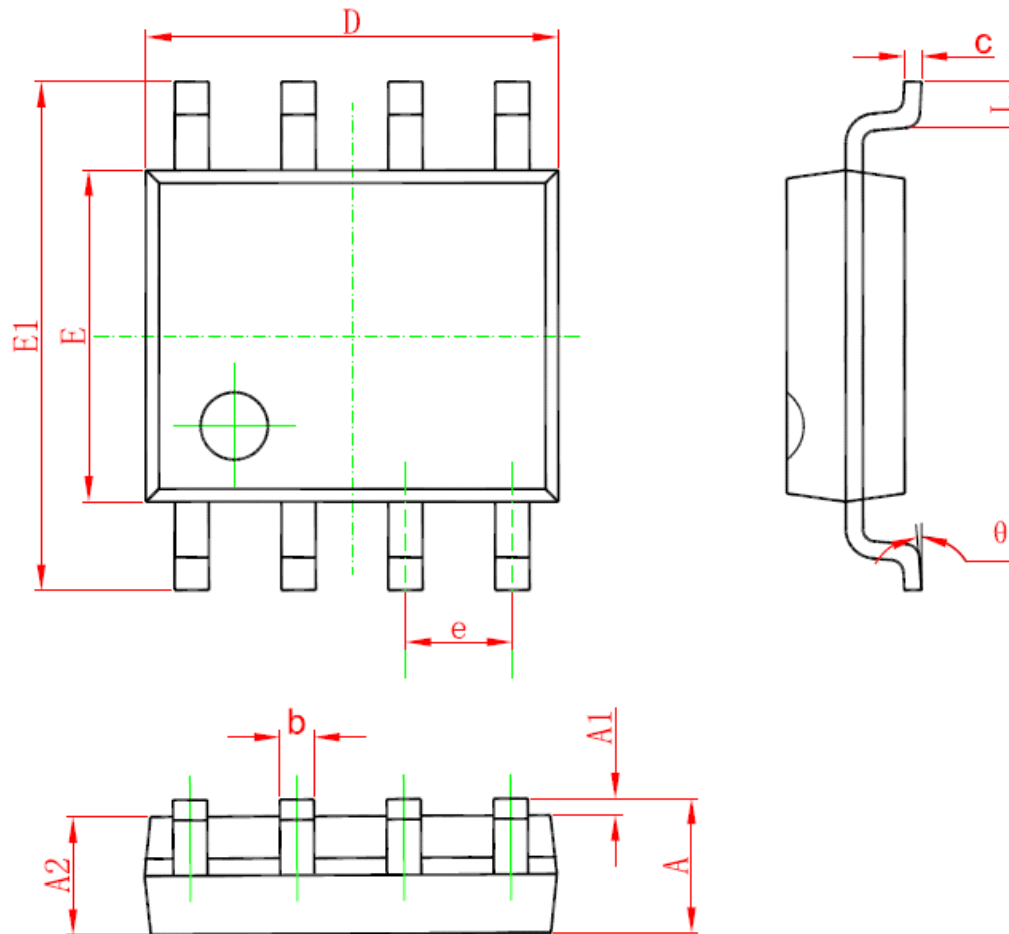

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.650	0.049	0.065
b	0.310	0.510	0.012	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.150	0.185	0.203
E	3.800	4.000	0.15	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.05 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°