

标 记
MARK

ECN编号/变更内容
ECN NO/DEFINITION

修 改
REVISE

日 期
DATE

核 准
APPROVE

A

B

C

D

E

F

G

A

B







C

D

E

F

G

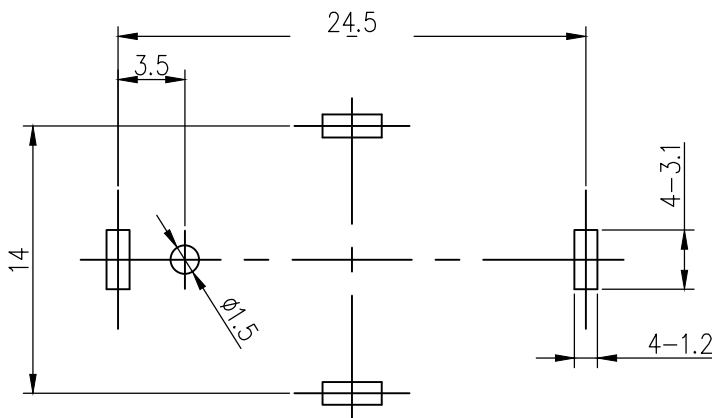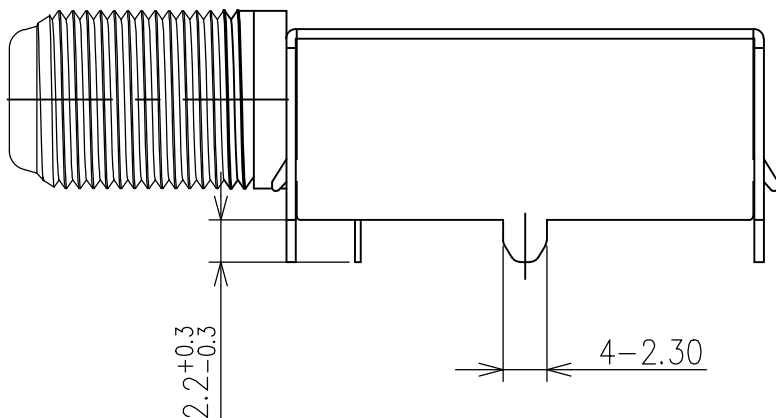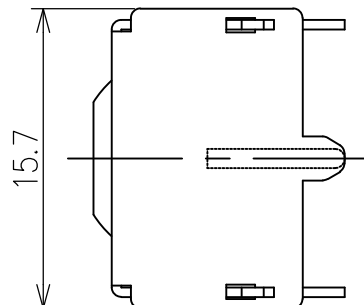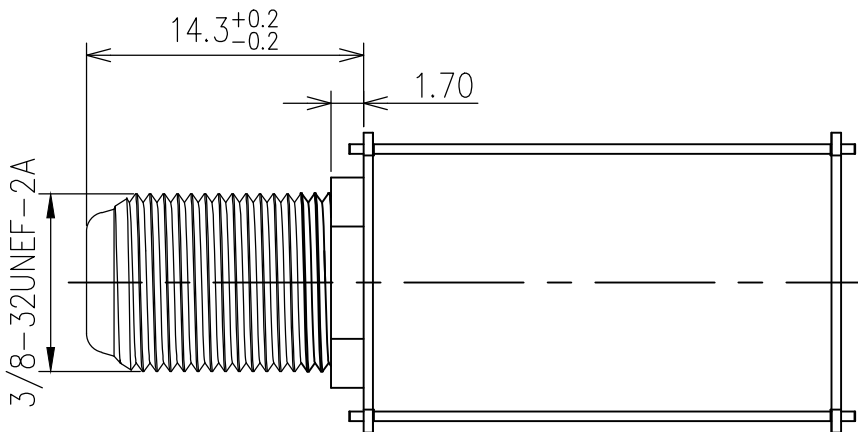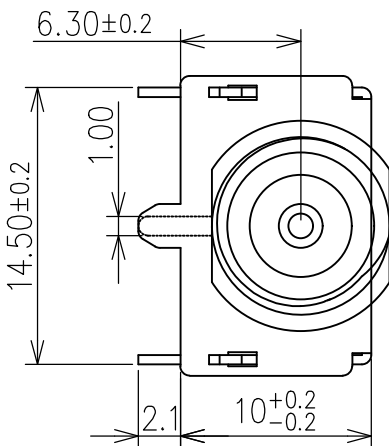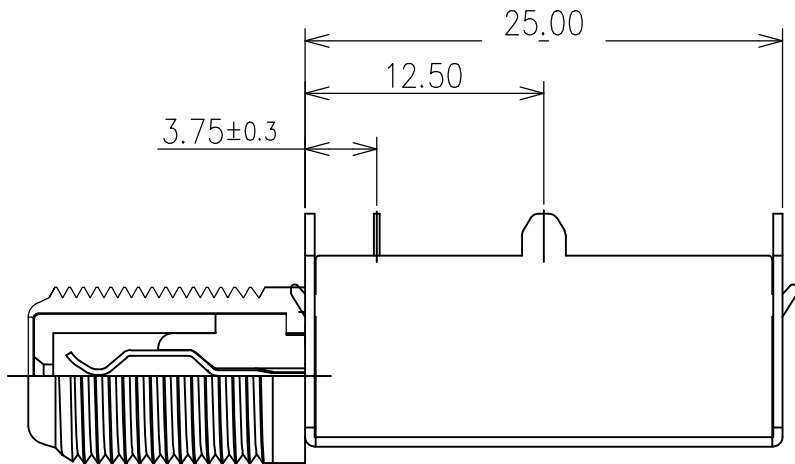

PCB LAYOUT(TOP VIEW) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.1mm

SPECIFICATION (技术要求)

1. Operating Temperature(环境温度): -25℃~85℃
2. Voltage Rating(额定电压): 50V AC/DC
3. Current Rating(额定电流): 0.5A
4. Contact Resistance(接触抗阻): 30mΩ
5. Insulation Resistance(绝缘抗阻): 100MΩ
6. Dielectric Withstanding Voltage(耐电压): 500V AC Min
7. Insertion/Withdrawal Force(插拔力): 3-50N
8. Life Time(mating cycles)寿命: >1000 Cycles
9. SIGNAL LOSS<1dB IN BOTH VHF, UHF BAND.
10. NOMINAL IMPEDANCE : 75 OHMS.
11. OPERATING FREQUENCY : 0-2 GHZ.

3	F头	锌合金	镀镍	
2	支架	马口铁	— —	
1	绝缘体	PPS	棕色	
序号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE	屏蔽罩
料 号 PART NO	HC-PBZ-R030

GENERAL TOLERANCES (UNLESS SPECIFIED)	比 列 SCALE	1:1	制 图 DRAW	AhYe	
X : ±0.5	单 位 UNIT	MM	张 数 PART NO	夏操云	
X.X : ±0.3 X : ±2°	版 本 REV	A	批 准 APPROVE	赵亮亮	
X.XX : ±0.2 X.X : ±1°					