
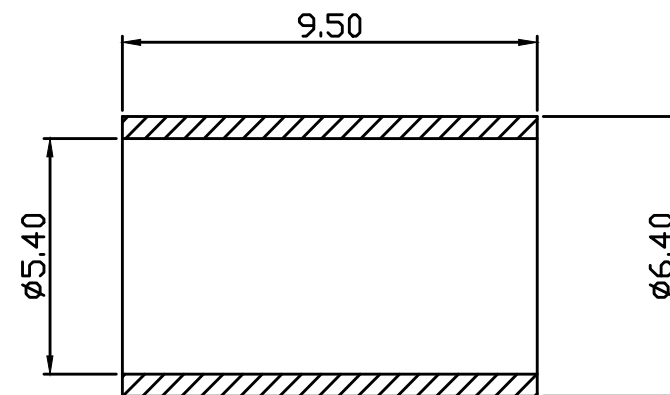
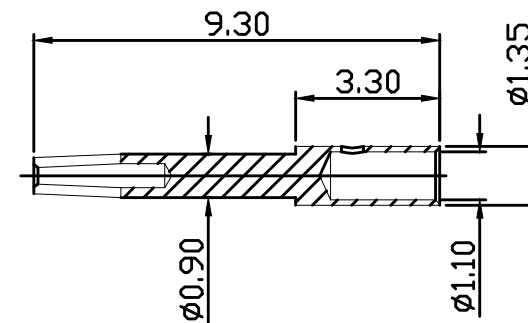


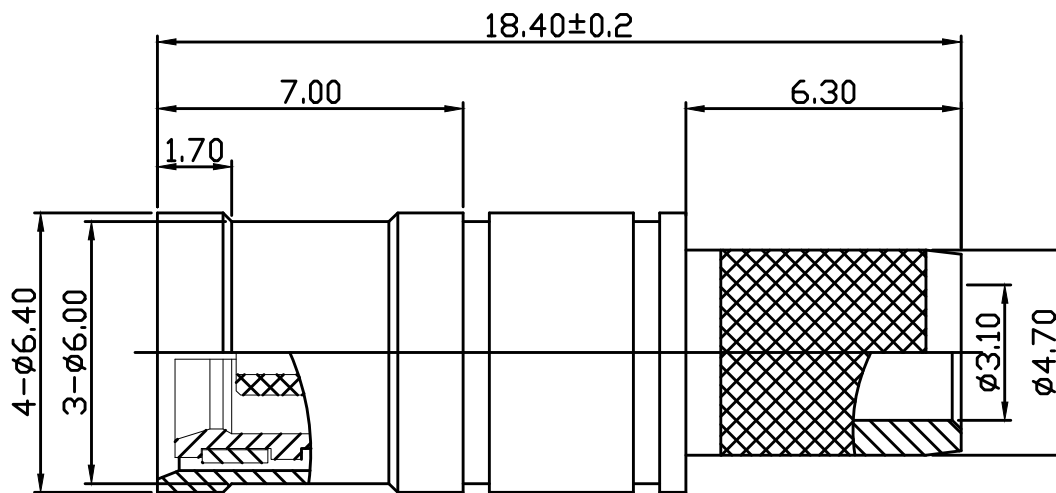

1. Electrical Characteristics

- 1.1 Impedance: 50 Ohm
- 1.2 Working Frequency: DC - 6 GHz
- 1.3 V. S. W. R. : 2.0Max
- 1.4 Working Voltage:335V / max
- 1.5 Withstand Voltage:750V RMS
- 1.6 Insulation Resistance: 5000 Mohm
- 1.7 Contact Resistance: Center Contact:5mohm
- 1.8 Outer Contact: ≤2.5 mohm

2. Environmental

- 2.1 Working Temperature Range: - 40 ° C ~ +85° C

6	铜管	黄铜 镀镍	1
5	PIN针	黄铜 镀金	1
4	卡环	磷铜 镀金	1
3	绝缘体	PTFE 白色	1
2	六爪本体	黄铜 镀金	1
1	本体	黄铜 镀金	1

部件 序号	部件品名/规格	材料	零件编号	用量
1				
2				
3				
4				
5				
6				

Rev.	Date.	ECN No.	变更者	Description. 内容

  Tolerance 未標注公差: . X ±0.2 . XX ±0.10 . XXX ±0.05 未標注角度公差: ±1°	 深圳市环协科技有限公司 ShenZhenHuanXieTechnologyco.ltd					
	C/U NO. 客戶編號	B023	Part Name. 品名/規格		SMB PLUG FOR RG58	
	Material. 材質		C/U Part No. 客戶料號			
	Finish. 處理		PartNo. 料號		HX-SMB-C-8394	
	Scale. 比例	1:1	Draw . 繪圖		Check. 校對	App. 核准
	REV. 版本/次	A/0	琺芬			
	Unite. 單位:	mm	19. 03. 04			