

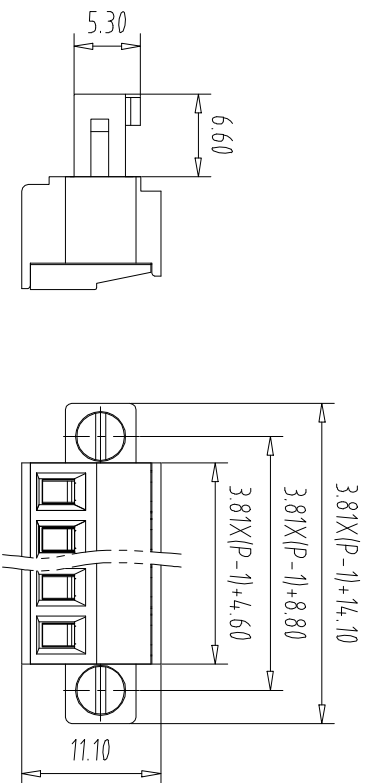


注：本型为禁止传输、复制、编辑、修改、以及用其内容进行交流

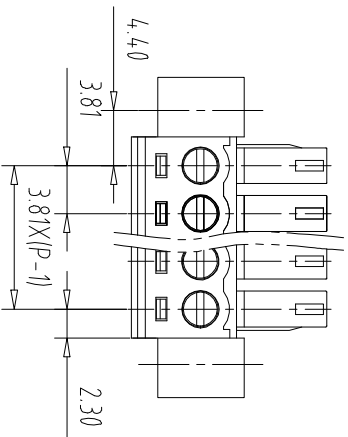

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

2.Torque value: M2.0, 1.77Lb.in

3.Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M2, 0.2Nm

3.wire range: 0.2~1.5mm²

NOTES2:

1.Housing: PA66 (UL94V-0)

2.Cover: PA66 (UL94V-0)

3.Cage: Brass (Ni Plated)

4.Clamp: Copper alloy (Ni Plated)

5.Screw 1: Steel (M2.0,Zn Plated)

6.Screw 2: Steel (M2.5,Zn Plated)

NOTES3:

1.Pitch: 3.81mm Poles: 02-24P

2.Stripping length: 6-7mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

MX15EDGKM - 381 - XXP - XXXX - XX - X - X

产品型号

间距

颜色:

极数

01:常规颜色

A-Z其他定制

灰色:GY 橙色:OE 02-99:

蓝色:BU 红色:RD 定制颜色

黑色:BK 透明色:TT

绿色:GN 黄色:YW

白色:WE

Cu:铜方块
Fe:铁方块
2:PS平头十字螺丝

Pitch Range In mm		Nominal Dimension Range In mm		—		0.1/10	
Over	6	Over	10	Over	30	Over	60
TO	6	TO	10	TO	30	TO	60
6	10	24	30	60	100	150	150

±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°
-------	-------	-------	-------	-------	-------	-------	-------	-----

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CKK	DATE	22.09.14	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	MX15EDGKM-3.81-XXP



CIXI MAIXU ELECTRONICS CO.,LTD.

慈溪市迈旭电子有限公司

DWGNO.

1