


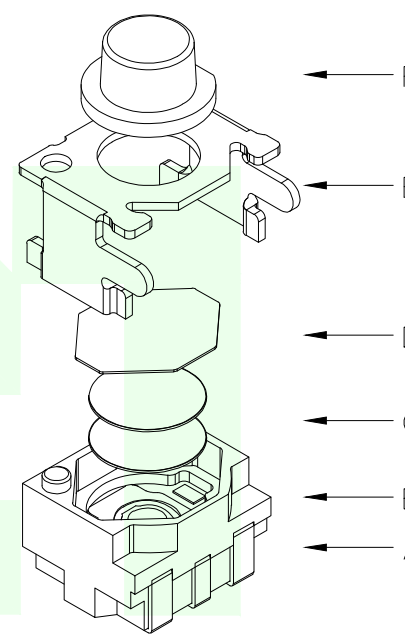


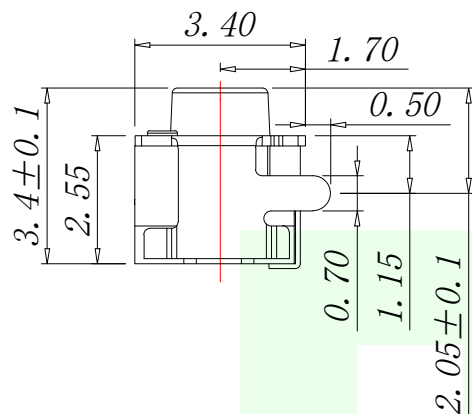


RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

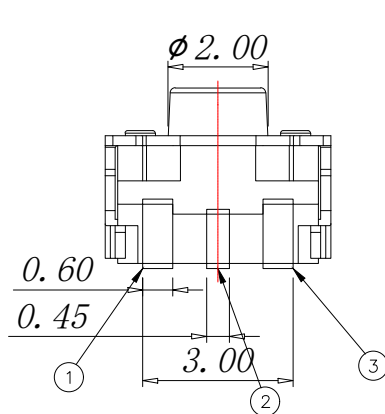

CIRCUIT DIAGRAM

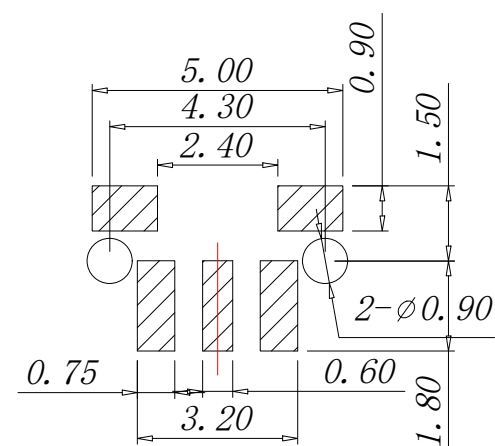

PCB.WELDING DRAWING

The Main Thchnology Performance


Rate voltage,current	50mA DC12V
Contact resistance	≤100mΩ
Operating force	±50gf
Travel	0.20±0.10mm
Insulated resistance	≥100MΩ
Dielectric strength	≥250VAC/1min

TS40210-411-AA

E	防尘膜	聚酰亚胺	1	橙黄
E	按钮	LCP	1	米黄色
D	盖板	磷铜	1	镀银
C	弹片	不锈钢	1	镀银
B	本体	PPA	1	黑色
A	卡件	磷铜	1	镀银
ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR

按力码 按力可定制
100=10
150=15
280=28

高度码
H3.4=034

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.35	X.° ±5°	PART NO. TS40210-411-AA		TITLE: 4.5*3.4*3.3 SMD TACT SWITCH	
.XX ±0.25	X.X° ±3°				
.XXX ±0.15	X.XX° ±1°	DESIGN: James	CUSTOMER	SIZE	UNITS
MANUFACTURE DWG		CHED: Talen		A4	MM
		APPD: Sophia			SCALE
			N:A	1/1	