


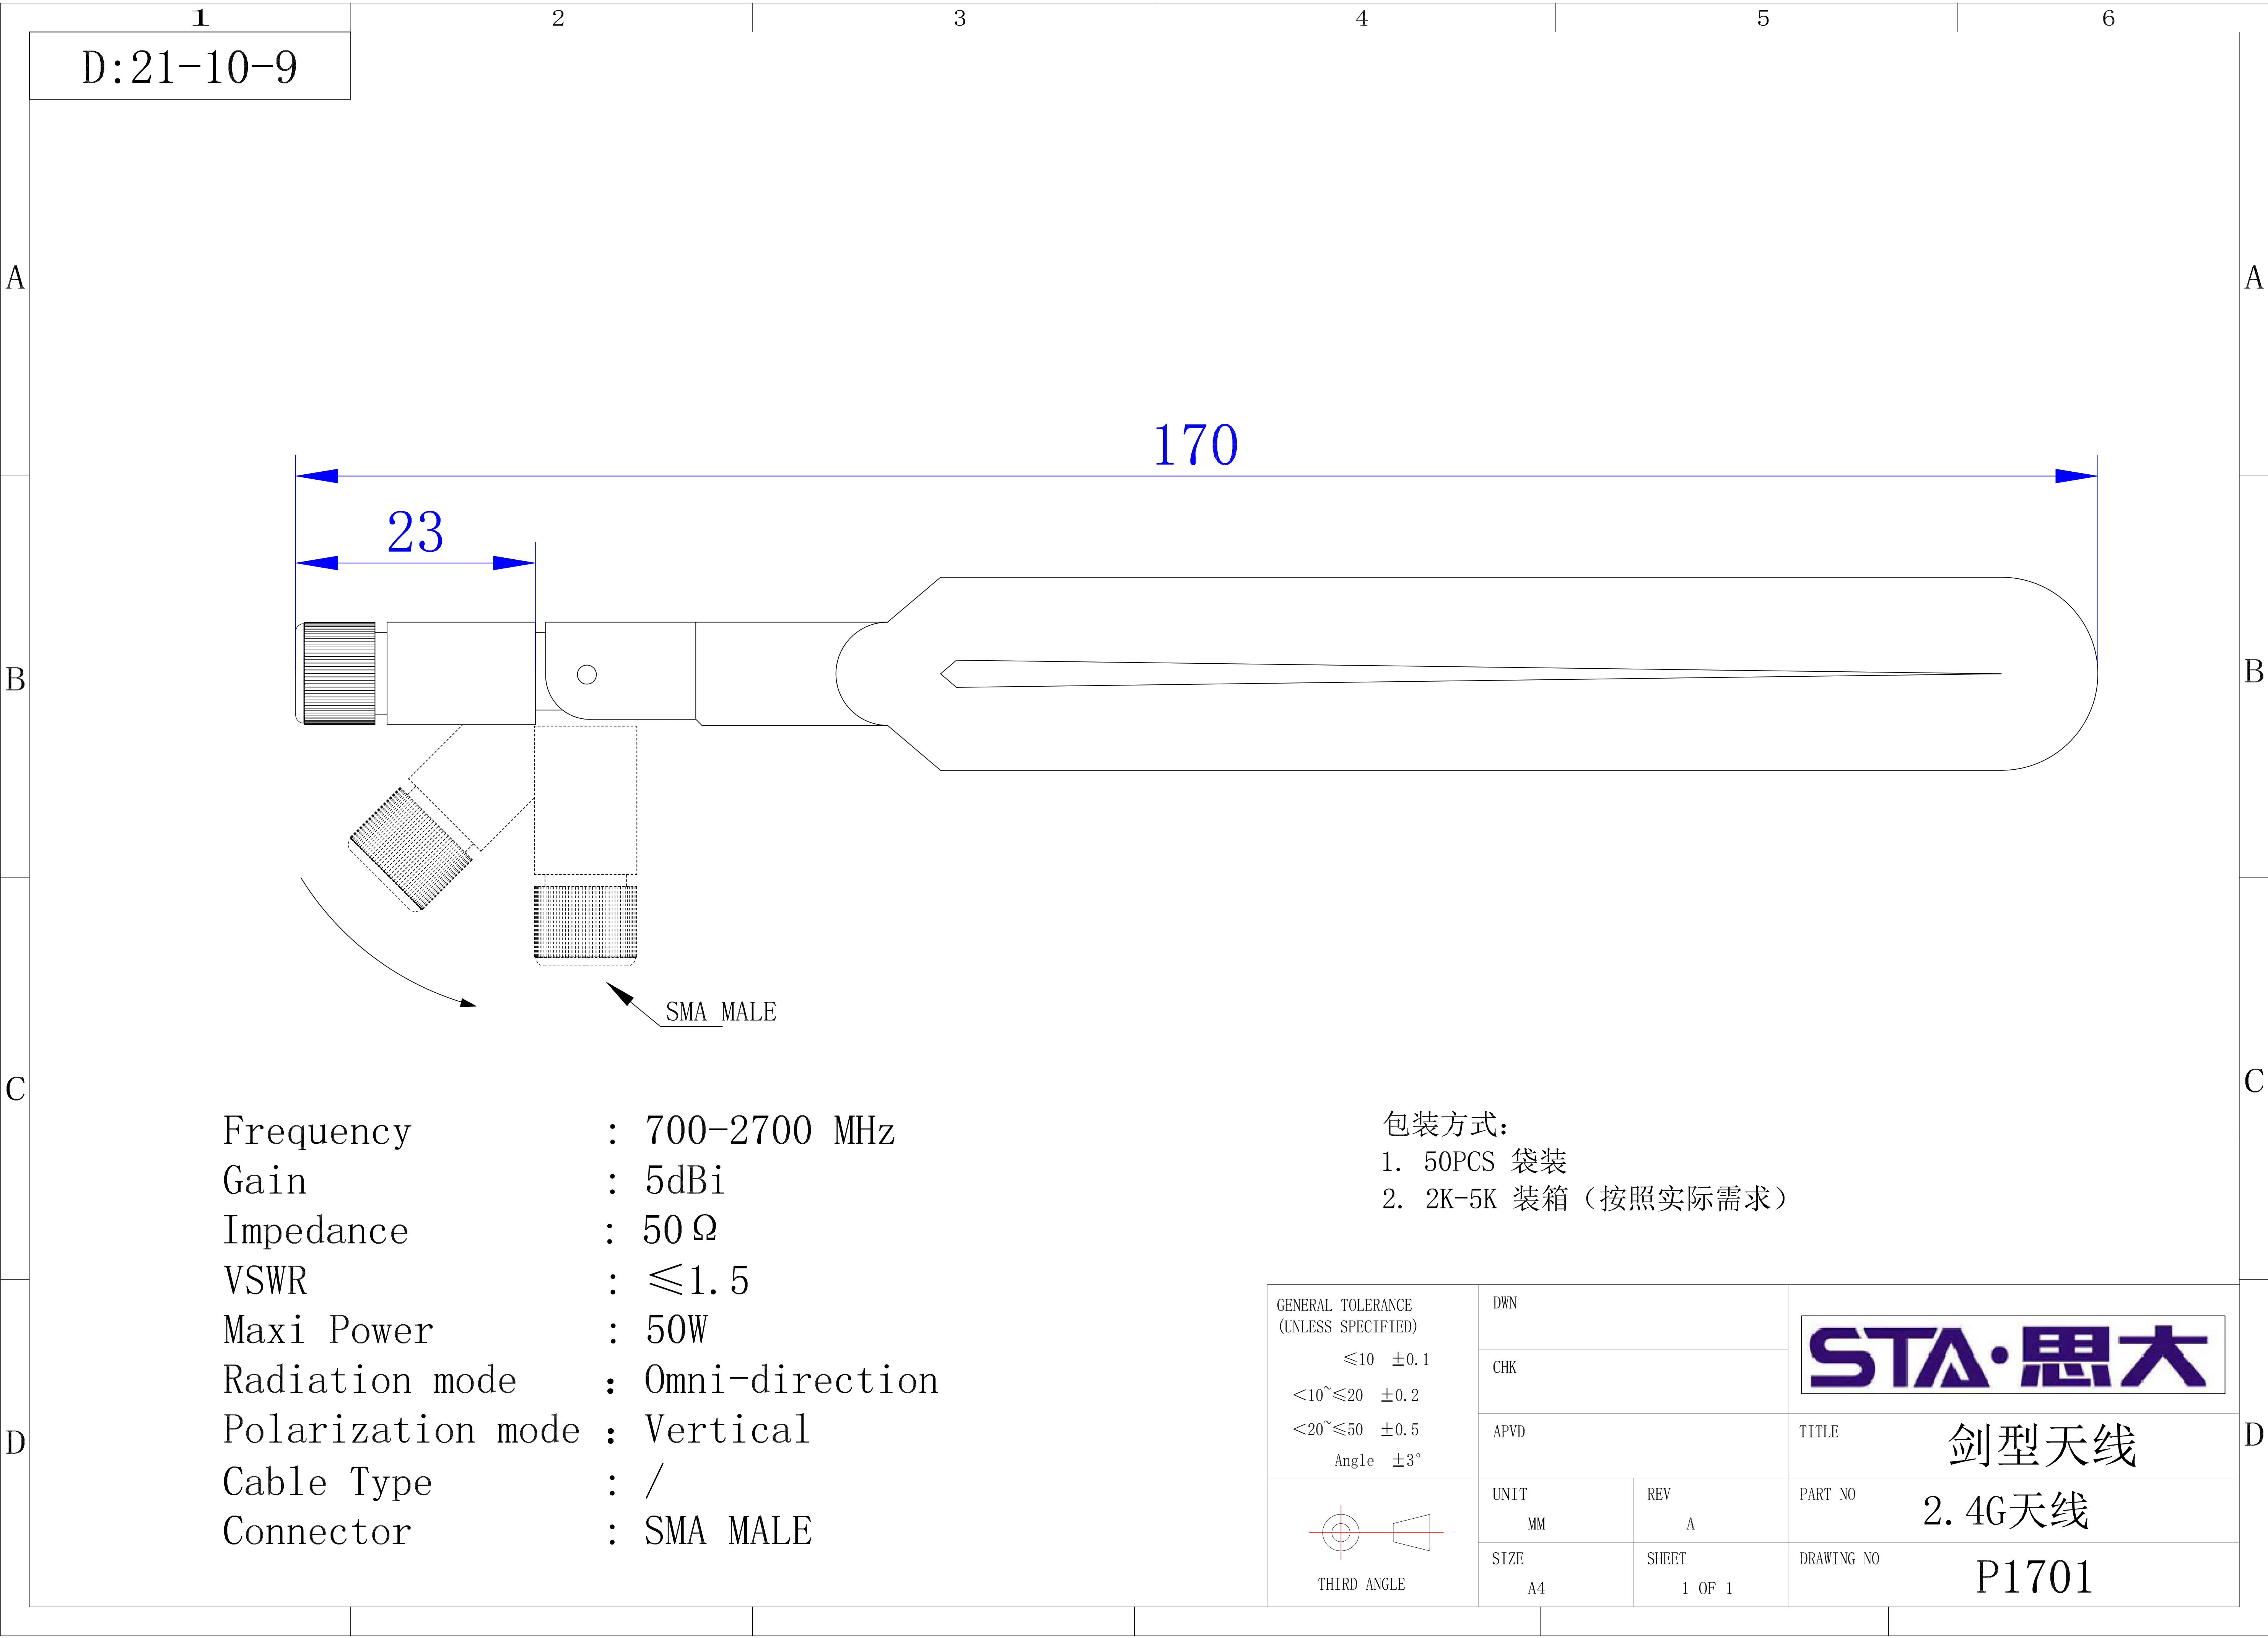

D:21-10-9

Frequency : 700-2700 MHz
Gain : 5dBi
Impedance : 50 Ω
VSWR : ≤1.5
Maxi Power : 50W
Radiation mode : Omni-direction
Polarization mode : Vertical
Cable Type : /
Connector : SMA MALE

包装方式:
1. 50PCS 袋装
2. 2K-5K 装箱（按照实际需求）

GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 <10~≤20 ±0.2 <20~≤50 ±0.5 Angle ±3°	DWN		STA·思大
	CHK		
	APVD		
 THIRD ANGLE	UNIT MM	REV A	TITLE 剑型天线
	SIZE A4	SHEET 1 OF 1	PART NO 2. 4G天线 DRAWING NO P1701