


4


3

2

1





CIRCUIT OF SWITCH

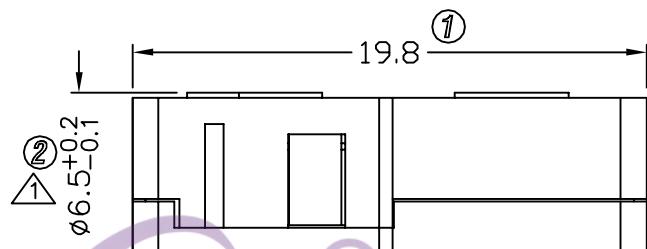


NOTES:

- 1.RATING: 5A125/250VAC.
 - 2.OPERATING FORCE: 240g±60gf 
 - 3.CONTACT RESISTANCE: <50mΩ
 - 4.INSULATION RESTISTANCE: >100MΩ(500VDC BETWEEN OPEN CONTACTS)
 - 5.DIELETRIC STRENGTH: >1500Vac 0.5mA 1 MINUTE
 - 6.COLOR: BLACK
 - 7.COMPLY WITH THE REQUITEMENTS OF THE EU DIRECTION 2002/GS/EC ROHS AND SUBSEQUENT AMENDMENTS.
 - 8.UL FILE NO.: E300970.

TEL: 0769-82310510-867

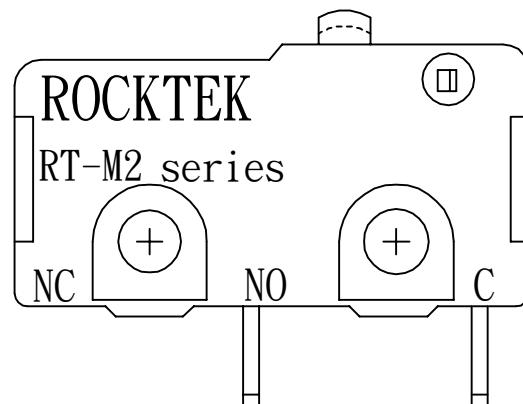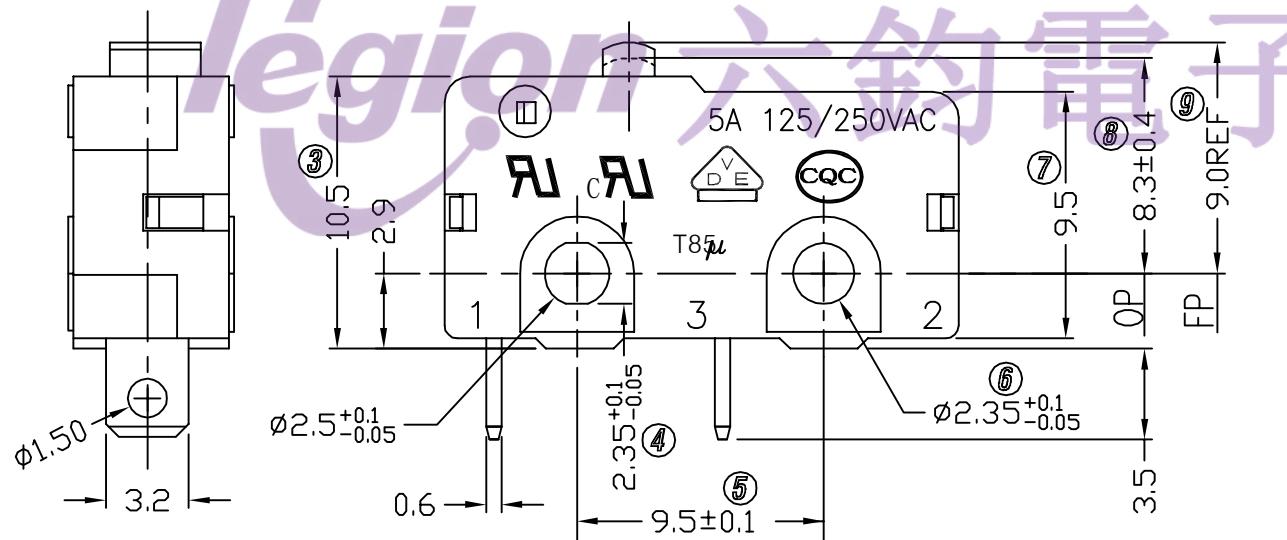

5	→	10	→	DIMENSIONAL TOLERANCES	APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM	
4	→	9	→	RANGE	TOLERANCE	SCALE	FIT				
3	→	8	→	X	± 0.4	MAT'L	***				
2	200 ± 30	→	240 ± 60	X.X	± 0.3	MATERIAL NO.					
1	6.4	→	$\phi 6.5^{+0.2}_{-0.1}$	X.XX	± 0.2	DRAWING NO.	REV				
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	$\pm 0.5^\circ$	ROCK TEK ELECTRICAL(SHENZHEN) CO.,LTD.			RTM2-0CNS05C200	WIF109010	C1