


裸端子系列

Non-Insulated Terminal Series

Non-Insulated
Terminal Series
裸端子系列




叉形裸端子
Non-Insulated Fork Terminal

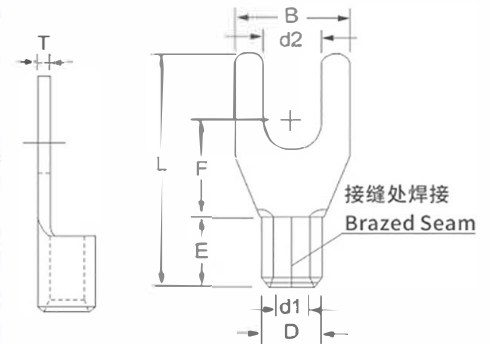

型号 ITEM NO.	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	说明 EXPLANATION		
	American	Metric d2	B	F	L	E	D	d1	T				
SNB0.5-3	#4	3.2	5.7	5.1	14.2	4.3	2.3	1.3	0.5	1000	导线截面:0.2~0.5mm² (美国线规26~22) 最大电流: I _{max} =10A 材质:紫铜 Lead Section: 0.5~1.5mm² (A.W. G.26-22) Max Current:I _{max} =10A Material:Copper		
SNB0.5-3.5S	#6	3.7											
SNB0.5-3.5L	#6	3.7	6.4	5.3									
SNB0.5-4	#8	4.3											
SNB1.25-3	#4	3.2	5.7	6.5	16.0	4.8	3.4	1.8	0.7	1000	导线截面:0.5~1.5mm² (美国线规22~16) 最大电流: I _{max} =19A 材质:紫铜 Lead Section: 0.5~1.5mm² (A.W. G.22-16) Max Current:I _{max} =19A Material:Copper		
SNB1.25-3.5S	#6	3.7											
SNB1.25-3.5L	#6	3.7	6.4										
SNB1.25-4S	#8	4.3											
SNB1.25-4M	#8	4.3	7.2										
SNB1.25-4L	#8	4.3	8.1										
SNB1.25-5S	#10	5.3											
SNB1.25-5L	#10	5.3	9.5										
SNB1.25-6S	1/4	6.5											
SNB1.25-6L	1/4	6.5	12.0									11.0	22.2
SNB1.25-8	5/16	8.5	14.0									12.0	23.5
SNB2-3	#4	3.2	5.7	6.5	15.5	5.0	4.0	2.3	0.8	1000	导线截面:1.5~2.5mm² (美国线规16~14) 最大电流: I _{max} =27A 材质:紫铜 Lead Section: 1.5~2.5mm² (A.W. G.16-14) Max Current:I _{max} =27A Material:Copper		
SNB2-3.5S	#6	3.7											
SNB2-3.5L	#6	3.7	6.5										
SNB2-4S	#8	4.3											
SNB2-4M	#8	4.3	7.2										
SNB2-4L	#8	4.3	8.2										
SNB2-5S	#10	5.3											
SNB2-5L	#10	5.3	9.5										
SNB2-6S	1/4	6.5											
SNB2-6L	1/4	6.5	12.0		11.0							22.0	
SNB2-8	5/16	8.5	14.0		12.5							23.6	




叉形裸端子
Non-Insulated Fork Terminal

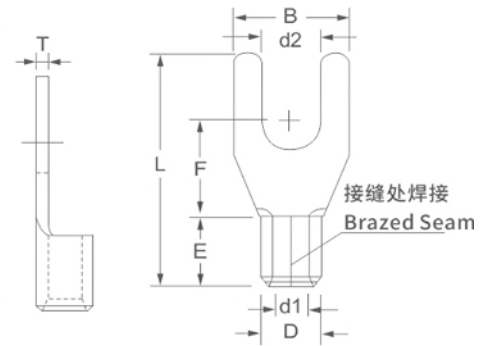

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	说明 EXPLANATION			
	American	Metric d2	B	F	L	E	D	d1	T					
SNB3.5-3	#4	3.2	8.0	7.0	18.3	6.0	5.0	3.0	1.0	1000	导线截面:2.5~4mm ² (美国线规14~12) 最大电流: I _{max} =37A 材质:紫铜 Lead Section: 2.5~4mm ² (A.W. G.14-12) Max Current:I _{max} =37A Material:Copper			
SNB3.5-3.5	#6	3.7												
SNB3.5-4	#8	4.3												
SNB3.5-5S	#10	5.3												
SNB3.5-6S	1/4	6.5	9.0	7.5	19.0									
SNB3.5-6L	1/4	6.5	12.0	9.1	21.5									
SNB3.5-8	5/16	8.5	14.0	11.5	23.8									
SNB3.5-10	3/8	10.5	17.5	12.5	26.5									
SNB5.5-3	#4	3.2	8.3	7.5	19.0	6.2	5.5	3.4	1.0	1000	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 Lead Section: 4~6mm ² (A.W. G.12-10) Max Current:I _{max} =48A Material:Copper			
SNB5.5-3.5	#6	3.7												
SNB5.5-4S	#8	4.3												
SNB5.5-4L	#8	4.3	8.9		19.3							6.6	5.8	3.7
SNB5.5-5	#10	5.3	9.0		19.0									
SNB5.5-6S	1/4	6.5												
SNB5.5-6L	1/4	6.5	12.0	12.0	24.0							6.2	5.5	3.4
SNB5.5-8	5/16	8.5	14.0		24.4									
SNB5.5-10	3/8	10.5	17.5		12.5									




叉形裸端子
Non-Insulated Fork Terminal

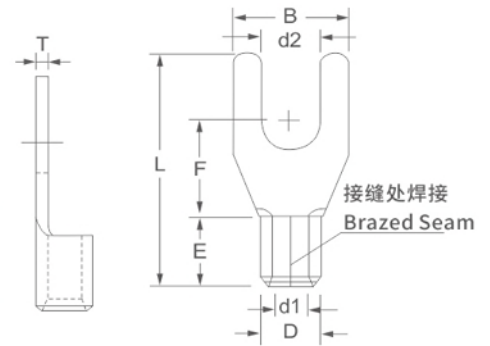

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	说明 EXPLANATION						
	American	Metric d2	B	F	L	E	D	d1	T								
SNB8-4S	#8	4.3	8.0	7.2	23.0	8.6	7.2	4.5	1.2	500	导线截面:8~10mm ² (美国线规8) 最大电流: I _{max} =62A 材质:紫铜 Lead Section: 8~10mm ² (A.W. G.8) Max Current:I _{max} =62A Material:Copper						
SNB8-4M	#8	4.3	9.0	7.5	23.8												
SNB8-4L	#8	4.3	10.5	9.0	23.0												
SNB8-5S	#10	5.3	9.0	7.5	21.2												
SNB8-5M	#10	5.3			23.8												
SNB8-5L	#10	5.3	10.8	7.2	23.0												
SNB8-6	1/4	6.5			28.0												
SNB8-8	5/16	8.5	14.5														
SNB8-10	3/8	10.5	16.0														
SNB14-4	#8	4.3	9.0	12.0	27.3	10.8	9.0	5.8	1.5	200	导线截面:10~16mm ² (美国线规6) 最大电流: I _{max} =88A 材质:紫铜 Lead Section: 10~16mm ² (A.W. G.6) Max Current:I _{max} =88A Material:Copper						
SNB14-5	#10	5.3	11.0	10.2	28.2												
SNB14-6	1/4	6.5			28.5												
SNB14-8	5/16	8.5	13.8														
SNB14-10	3/8	10.5	15.9														
SNB22-5	#10	5.3	12.8	13.5	33.0	12.0	11.5	7.7	1.8	200	导线截面:16~25mm ² (美国线规4) 最大电流: I _{max} =115A 材质:紫铜 Lead Section: 16~25mm ² (A.W. G.4) Max Current:I _{max} =115A Material:Copper						
SNB22-6	1/4	6.5			33.5												
SNB22-8S	5/16	8.5															
SNB22-8	5/16	8.5	16.5	13.7	33.5												
SNB22-10	3/8	10.5															

叉形裸端子 (90D)
Non-Insulated Fork Terminal
90-Degree

角度可定制
Customized design

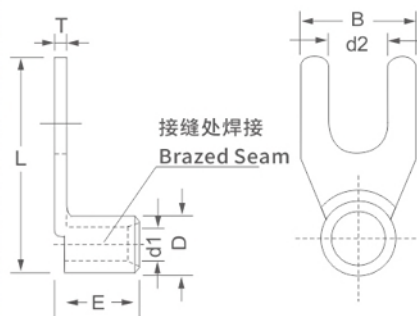


型号 ITEM NO.	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm						包装 PCS/ PACK	说明 EXPLANATION	
	American	Metric d2	B	L	E	D	d1	T			
SNB0.5-3-90D	#4	3.2	5.7	12.0	5.5	2.3	1.3	0.5	1000	导线截面:0.2~0.5mm² (美国线规26~22) 最大电流: I _{max} =10A 材质:紫铜 Lead Section: 0.5~1.5mm² (A.W. G.26-22) Max Current:I _{max} =10A Material:Copper	
SNB0.5-3.5S-90D	#6	3.7									
SNB0.5-3.5L-90D	#6	3.7	6.4								
SNB0.5-4-90D	#8	4.3									
SNB1.25-3-90D	#4	3.2	5.7	14.0	6.0	3.4	1.8	0.7	1000	导线截面:0.5~1.5mm² (美国线规22~16) 最大电流: I _{max} =19A 材质:紫铜 Lead Section: 0.5~1.5mm² (A.W. G.22-16) Max Current:I _{max} =19A Material:Copper	
SNB1.25-3.5S-90D	#6	3.7									
SNB1.25-3.5L-90D	#6	3.7	6.4								
SNB1.25-4S-90D	#8	4.3									
SNB1.25-4M-90D	#8	4.3	7.2								
SNB1.25-4L-90D	#8	4.3	8.1								
SNB1.25-5S-90D	#10	5.3									
SNB1.25-5L-90D	#10	5.3	9.5								
SNB1.25-6S-90D	1/4	6.5									
SNB1.25-6L-90D	1/4	6.5	12.0								20.2
SNB1.25-8-90D	5/16	8.5	14.0								21.5
SNB2-3-90D	#4	3.2	5.7	13.5	6.2	4.0	2.3	0.8	1000	导线截面:1.5~2.5mm² (美国线规16~14) 最大电流: I _{max} =27A 材质:紫铜 Lead Section: 1.5~2.5mm² (A.W. G.16-14) Max Current:I _{max} =27A Material:Copper	
SNB2-3.5S-90D	#6	3.7									
SNB2-3.5L-90D	#6	3.7	6.5								
SNB2-4S-90D	#8	4.3									
SNB2-4M-90D	#8	4.3	7.2								
SNB2-4L-90D	#8	4.3	8.2								
SNB2-5S-90D	#10	5.3									
SNB2-5L-90D	#10	5.3	9.5								
SNB2-6S-90D	1/4	6.5									
SNB2-6L-90D	1/4	6.5	12.0	20.0							
SNB2-8-90D	5/16	8.5	14.0	21.6							



叉形裸端子 (90D)
Non-Insulated Fork Terminal
90-Degree

角度可定制
Customized design

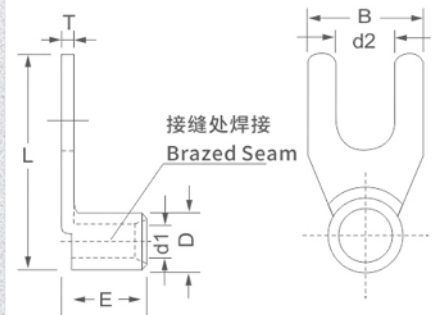


型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm						包装 PCS/ PACK	说明 EXPLANATION								
	American	Metric d2	B	L	E	D	d1	T										
SNB3.5-3-90D	#4	3.2	8.0	16.3	7.0	5.0	3.0	1.0	1000	导线截面:2.5~4mm ² (美国线规14~12) 最大电流: I _{max} =37A 材质:紫铜 Lead Section: 2.5~4mm ² (A.W. G.14-12) Max Current:I _{max} =37A Material:Copper								
SNB3.5-3.5-90D	#6	3.7																
SNB3.5-4-90D	#8	4.3																
SNB3.5-5S-90D	#10	5.3																
SNB3.5-6S-90D	1/4	6.5	9.0	17.0							7.4	5.5	3.4	1.0	1000	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 Lead Section: 4~6mm ² (A.W. G.12-10) Max Current:I _{max} =48A Material:Copper		
SNB3.5-6L-90D	1/4	6.5	12.0	19.5														
SNB3.5-8-90D	5/16	8.5	14.0	21.8														
SNB3.5-10-90D	3/8	10.5	17.5	24.5														
SNB5.5-3-90D	#4	3.2	8.3	17.0	7.4	5.5	3.4	1.0	1000	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 Lead Section: 4~6mm ² (A.W. G.12-10) Max Current:I _{max} =48A Material:Copper								
SNB5.5-3.5-90D	#6	3.7																
SNB5.5-4S-90D	#8	4.3																
SNB5.5-4L-90D	#8	4.3	8.9	17.3							7.4	5.5	3.4	1.0			1000	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 Lead Section: 4~6mm ² (A.W. G.12-10) Max Current:I _{max} =48A Material:Copper
SNB5.5-5-90D	#10	5.3	9.0	17.0														
SNB5.5-6S-90D	1/4	6.5																
SNB5.5-6L-90D	1/4	6.5	12.0	22.0											7.4	5.5		
SNB5.5-8-90D	5/16	8.5	14.0	22.4														
SNB5.5-10-90D	3/8	10.5	17.5															



叉形裸端子 (90D)
Non-Insulated Fork Terminal
90-Degree

角度可定制
Customized design

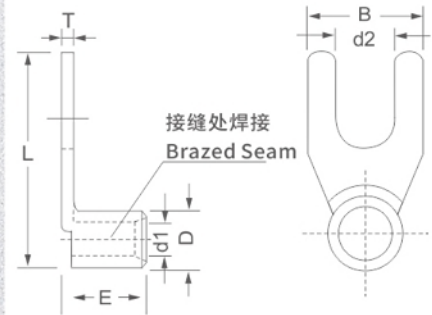

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm						包装 PCS/ PACK	说明 EXPLANATION
	American	Metric d2	B	L	E	D	d1	T		
SNB8-4S-90D	#8	4.3	8.0	20.5	10.0	7.2	4.5	1.2	500	导线截面:8~10mm ² (美国线规8) 最大电流: I _{max} =62A 材质:紫铜 Lead Section: 8~10mm ² (A.W. G.8) Max Current:I _{max} =62A Material:Copper
SNB8-4M-90D	#8	4.3	9.0	21.2						
SNB8-4L-90D	#8	4.3	10.5	20.5						
SNB8-5S-90D	#10	5.3	9.0	18.7						
SNB8-5M-90D	#10	5.3		21.2						
SNB8-5L-90D	#10	5.3	10.8	20.5						
SNB8-6-90D	1/4	6.5		25.4						
SNB8-8-90D	5/16	8.5	14.5							
SNB8-10-90D	3/8	10.5	16.0							
SNB14-4-90D	#8	4.3	9.0	24.2	12.5	9.0	5.8	1.5	200	导线截面:10~16mm ² (美国线规6) 最大电流: I _{max} =88A 材质:紫铜 Lead Section: 10~16mm ² (A.W. G.6) Max Current:I _{max} =88A Material:Copper
SNB14-5-90D	#10	5.3	11.0	25.0						
SNB14-6-90D	1/4	6.5		25.3						
SNB14-8-90D	5/16	8.5	13.8							
SNB14-10-90D	3/8	10.5	15.9							
SNB22-5-90D	#10	5.3	12.8	30.7	14.0	11.5	7.7	1.8	200	导线截面:16~25mm ² (美国线规4) 最大电流: I _{max} =115A 材质:紫铜 Lead Section: 16~25mm ² (A.W. G.4) Max Current:I _{max} =115A Material:Copper
SNB22-6-90D	1/4	6.5								
SNB22-8S-90D	5/16	8.5								
SNB22-8-90D	5/16	8.5	16.5	31.2						
SNB22-10-90D	3/8	10.5								