



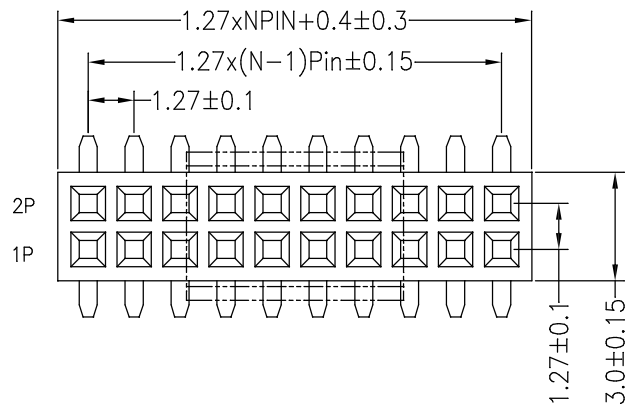

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

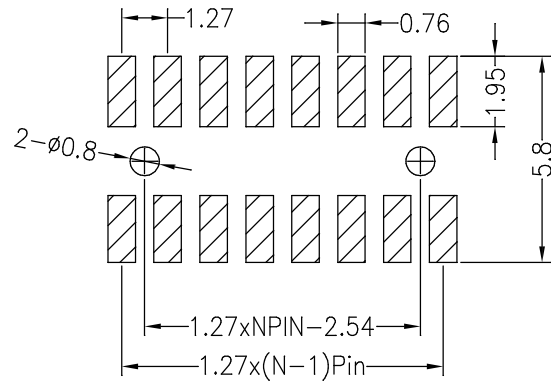

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C



Contact Material:Phosphor Bronze

Contact Plating:Au Over Ni


Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

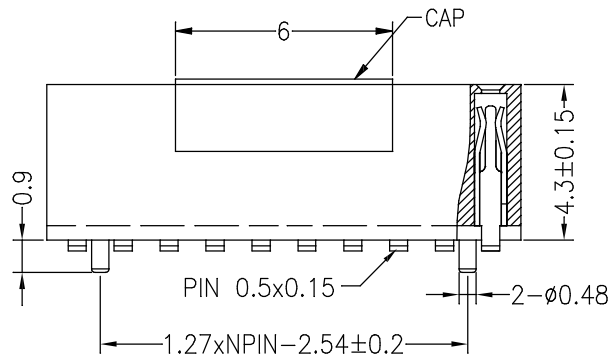

P= With Post



默认 = W/O Post

Ordering Information

No. of Rows	No. of Pins	Type	Length (mm)	Contact Plating	R-Row	Post
1=Single Row	3-50Pin	2=00	4.3	G2:Gold Flash	Cap	00
2=Dual Row	3-50Pin	0=00	4.3	G1:1u" Gold	00	00
		1=00	4.3	G2:3u" Gold		
		2=00	4.3	G3:5u" Gold		
		3=00	4.3	G4:10u" Gold		
		4=00	4.3	G5:15u" Gold		
		5=00	4.3	G6:30u" Gold		
		6=00	4.3	S2:Gold Flash/Tin		
		7=00	4.3	St: Tin		

GENERAL TOLERANCE			制 图		深圳市华灿天禄电子有限公司			
DIM TOL			DRAWING		ShenzhenhuacantianluELECTRONICS CO.,LTD			
X.X ±0.30			审 核		产品名称		版 本	A
X.XX ±0.20			批 准		1.27 双排 插针 贴片		REV.	
X.XXX ±0.10			比 例		规格4.3 (轴带+盖)		单 位	mm
Angle ±3.0°			投 影		PM127-2-N-S-4.3-G0-R		页 次	1/1
序号	变更内容	日 期	投影	Projection	材 料		SHEET	
No.	MODIFY CONTENT	MODIFY DATE			MATERIAL			