
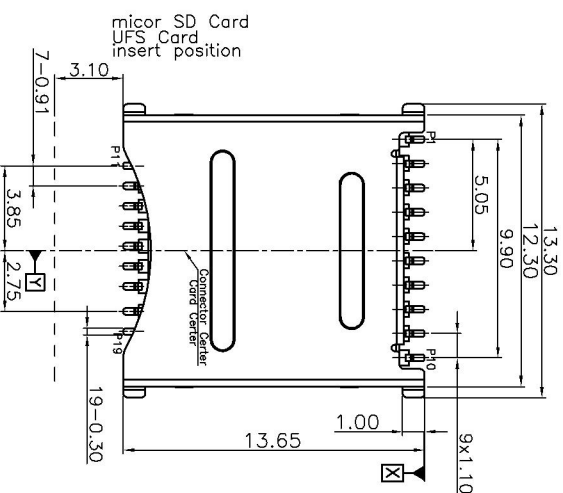


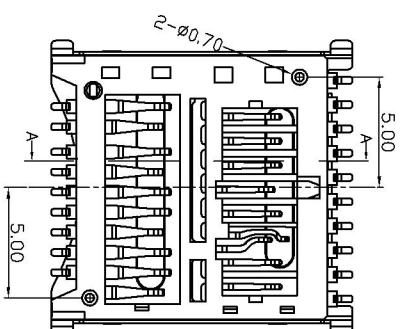

Specification

1. MATERIAL:

1. MATERIAL:

- 1.1 Insulator:High Temperature Thermoplastic,
(LCP S475),UL Block 94V-0.
 - 1.2 Contact: Phosphor Bronze(C5210R-H,T=0.15±0.03mm)
 - 1.3 Shell: SUS304 T=0.15±0.03mm
- 2.Plating:
- 2.1 Contact: Plated 50u"min Ni Overall
Plated 1u"min Au Selective contact area
Gold Flash over Ni on solder area
 - 2.2 Shell: Plated 30u"min Ni Overall
Gold Flash Selective Contact Area
- 3.Property:
- 3.1 Current Rating :0.5A
 - 3.2 Withstanding Voltage:AC500V r.m.s
 - 3.3 Ambient Temperature Range :-30°C~+80°C
 - 3.4 Contact Resistance:200mΩ Maximum
 - 3.5 Insulation Resistance:500 MΩ Minimum at DC 500V.
 - 3.6 Durability:10,000 cycles

RECOMMEND P.C.B LAYOUT
(General tolerance ± 0.05)

 PAD AREA
 KEEP OUT AREA
 GND PATTERN ONLY

深圳市连欣科技有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:
X.X ±0.30		CO CO	2020.06.11	TF 三合一卡座 SMT TYPE
X.XX ±0.25		CHECKED BY:	DATE :	PART NO.
X.XXX ±0.15			2020.06.11	XDFP-C7211-0316
X: ±2				MOLD NO.
X.X ±0.5		APPROVED BY:	DATE :	DRAW NO:
		Andy	2020.06.11	LX-2206011718
				SHEET NO.