CIOD I CIN, II IO.	Drawing Title: USB Key A 20-pin Plug mating to shielded header aka USB-E (USB TYPE-E) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB wiring connector, Plug Connector 20 Position Surface Mount, For overmolding	SB 3.1)) Internal	
•	Model No. Connector		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. PLUG-USBE-20PINBM	Rev A	
Fax (201) 784-0111			

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at http://www.globtek.com/iso-certificates/

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (http://www.globtek.com/terms-and-conditions/).

Prop 65 Statement: https://www.globtek.com/prop-65-statement.pdf

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

GlobTek, Inc. www.globtek.com	Drawing Title: USB Key A 20-pin Plug mating to shielded header aka USB-E (USB TYPE-E) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Internal wiring connector, Plug Connector 20 Position Surface Mount, For overmolding	
186 Veterans Drive,	Model No. Connector	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. PLUG-USBE-20PINBM	Rev A
Fax (201) 784-0111		

REVISION HISTORY

REV	,	DESCRIPTION	SUB	DATE	APPROVED
	Α	Initial release	DR	02/24/2023	DAVID

AGENCY ONLINE DOCUMENTS

RoHS/RoHS3 Declaration https://www.globtek.com/pdf/rohs_cert/01t3a000005hFTtAAM
REACH Declaration https://www.globtek.com/r2/eM2co8
Conflict Minerals Declaration https://www.globtek.com/r2/SNw6P3
Prop 65 Statement https://www.globtek.com/r2/VMPRnr

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

USB 3.1 Internal Connector Plug (Key A 20 Pin Cable Plug Interface) For overmolding



Mechanical Drawing


GlobTek, Inc.
www.globtek.com
186 Veterans Drive,
Northvale, NJ 07647
Tel. (201) 784-1000
Fax (201) 784-0111

Drawing Title: USB Key A 20-pin Plug mating to shielded header aka USB-E (USB TYPE-E) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Internal
wiring connector, Plug Connector 20 Position Surface Mount, For overmolding

Model No. Connector

Part No./Ordering No. PLUG-USBE-20PINBM

Rev A

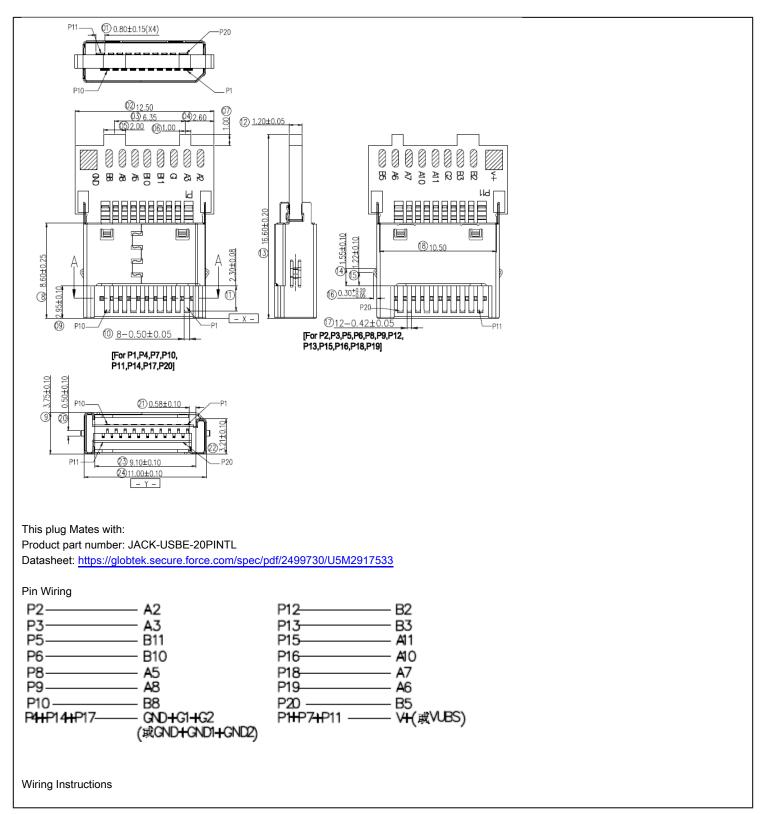

GlobTek, Inc.	Drawing Title: USB Key A 20-pin Plug mating to shielded header aka USB-E (USB TYPE-E) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1 wiring connector, Plug Connector 20 Position Surface Mount, For overmolding	1)) Internal
186 Veterans	Model No. Connector	
Northvale, NJ	7	
Tel. (201) 784	Part No./Ordering No. PLUG-USBE-20PINBM Rev	' A
Fax (201) 784		



Image Not Available

This image is not available because:

- You don't have the privileges to see it, OR
- . It has been removed from the system

SPECIFICATIONS

1.MATERIALS:

SHELL: STAINLESS STEEL;

HOUSING: THERMOPLASTIC.UL94—VO,BLACK;

CONTACT: COPPER ALLOYS;

2.PLATING:

CONTACT: 50,-100u"Min. NICKEL UNDERPLATING OVERALL;

PLATED GOLD 30u"M in. ON CONTACT AREA,

OR REFERENCE PART NO. CODE:

PLATED MATTE Sn 60"150u"MIN. ON SOLDER AREA;

SHELL: PLATED NICKEL;

3.DIMENSIONAL TOLERANCE:

NOT SPECIFIED TOLERANCE, COMPLIED TO THE GENERAL TOLERANCE; CONTROL DIMENSIONS INDICATED FORM "V", MUST BE INSPECTED BY QC;

4.ELECTRICAL CHARACTERISTICS:

LOW LEVEL CONTACT RESISTANCE: 40mΩ Max.:

INSULATION RESISTANCE:100MΩ Min.;

DIELECTRIC WITHSTANDING VOLTAGE:100 VAC;

CONTACT CURRENT RATING: 3A Max;

5.MECHANICAL CHARACTERISTICS:

INSERTION FORCE: 35N MAX;

EXTRACTION FORCE:15N MIN;

DURABILITY: 50 CYCLES:


6.IR REFLOW CONDITION PEAK TEMPERATURE: 260°-10S

guest /10/14/2024 1:02:47 PM CLONED FROM PLUG-USBE-20PINST

7. COMPLIES WITH USB 3.1

PACKAGING

GlobTek, Inc. www.globtek.com	Drawing Title: USB Key A 20-pin Plug mating to shielded header aka USB-E (USB TYPE-E) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (Uwiring connector, Plug Connector 20 Position Surface Mount, For overmolding	SB 3.1)) Internal
186 Veterans Drive,	Model No. Connector	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. PLUG-USBE-20PINBM	Rev A
Fax (201) 784-0111		

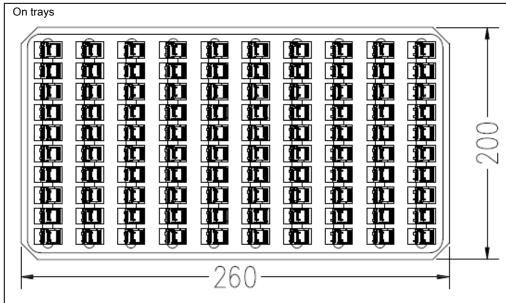

TRAY SIZE: 260 X 200 X 10.6MM

QUANTITY/TRAY: 80 PCS

GlobTek, Inc. www.globtek.com	Drawing Title: USB Key A 20-pin Plug mating to shielded header aka USB-E (USB TYPE-E) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Internal wiring connector, Plug Connector 20 Position Surface Mount, For overmolding		
186 Veterans Drive,	Model No. Connector		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. PLUG-USBE-20PINBM	Rev A	
Fax (201) 784-0111			

QUANTITY/INNER CARTON: 8000 PCS	
MASTER CARTON, 100 TRAYS, 375 X 295 X 280 MM	

GlobTek, Inc. www.globtek.com	Drawing Title: USB Key A 20-pin Plug mating to shielded header aka USB-E (USB TYPE-E) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Internal wiring connector, Plug Connector 20 Position Surface Mount, For overmolding		
186 Veterans Drive,	Model No. Connector	tor .	
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. PLUG-USBE-20PINBM	Rev A	
Fax (201) 784-0111			

PACKAGING Packing Spec P/N: Box Qty: 8000 Gift Box Size (mm): 260 x 200 x 10.6 Gift Box Color: White Master Carton Size (mm): 280 x 375 x 295 Master Carton Cubic Volume (m³): 0.03 Master GW (Kg): kg wt Ea. (Kg): kg wt Ea. (Kg): kg LABEL SPECS:, PACK SPEC: