

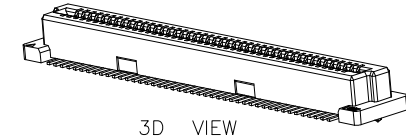




NOTES:

- 1.HUOSING:LCP HGH-TEMP THERMOPLASTIC UL94V-0
- 2.TERMINAL:PHOSPHOR BRONZE
- 3.COLOR:BEIGE

SECTION: A-A
3.7HSECTION: A-A
7.7H/11.7H/15.7H

SOCKET H1	MATED HEIGHT			
	PLUG H			
4.70	5.70	6.70	7.70	
3.70	5.00	6.00	7.00	8.00
7.70	9.00	10.00	11.00	12.00
11.70	13.00	14.00	15.00	16.00
15.70	17.00	18.00	19.00	20.00

Model	PIN	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
BTB0.850-40PLBDC-M41	40	21.80	15.20	16.80	20.20	18.80	20.15
BTB0.850-50PLBDC-M41	50	25.80	19.20	20.80	24.20	22.80	24.15
BTB0.850-60PLBDC-M41	60	29.80	23.20	24.80	28.20	26.80	28.15
BTB0.850-80PLBDC-M41	80	37.80	31.20	32.80	36.20	34.80	36.15
BTB0.850-100PLBDC-M41	100	45.80	39.20	40.80	44.20	42.80	44.15
BTB0.850-120PLBDC-M41	120	53.80	47.20	48.80	52.20	50.80	52.15
BTB0.850-140PLBDC-M41	140	61.80	55.20	56.80	60.20	58.80	60.15
BTB0.850-160PLBDC-M41	160	69.80	63.20	64.80	68.20	66.80	68.15
BTB0.850-180PLBDC-M41	180	77.80	71.20	72.80	76.20	74.80	76.15
BTB0.850-200PLBDC-M41	200	85.80	79.20	80.80	84.20	82.80	84.15

MANUFACTURE DWG

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,LtdUNLESS OTHERWISE
SPECIFIED TOLERANCESTITLE: 0.8mm PITCH BTB
CONNECTOR SOCKET

DECIMALS:

ANGLES:

.X±0.25

±1°

.XX±0.20

SCALE:1:1

UNIT:MM

SIZE:A4

SHEET:1F1

REV:A

CUSTOMER COPY

CUSTOMER COPY

CUSTOMER COPY

CUSTOMER COPY

CUSTOMER COPY

CUSTOMER COPY