

Poles	01P	02P	03P	04P	05P	06P	07P	08P	09P	10P	12P
Dim P	---	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	27.94
Dim L	3.96	6.50	9.04	11.58	14.12	16.66	19.20	21.74	24.28	26.82	31.90






REV	ECN	DESCRIPTION	DRFT	DATE

Specifications

- Contact Rating
Switching.....25mA,24VDC
Non-Switchin.....100mA,50VDC
- Contact Resistance
Initial.....50mΩ Max
After Life Test.....100mΩ Max
- Insulation Resistance.....100MΩ Min at 500VAC
- Dielectric Strength.....500VAC/1 minute
- Operating Force.....1000g Max
- Mechanical Life.....5000 cycles
- Electrical Life.....3000 cycles
- Operating Temperature : -40℃ to +85℃.
- Storage Temperature : -40℃ to +85℃.

Packaging Information

- All DIP switches are shipped in Tube
- Actuators all in "OFF" position

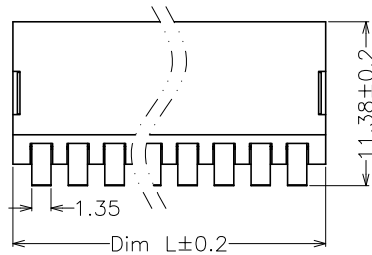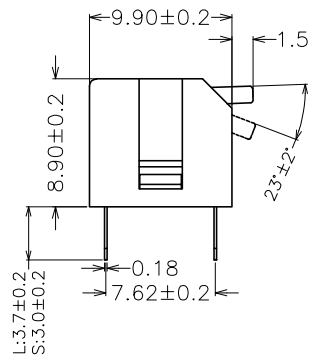

P.C.B.LAYOUT

SCHEMATIC(TYP.)



(1,2,3,4,5,POS AVAILABLE)

HOW TO ORDER

DP-XXP-C-X X

- > L: LONG PIN(3.7) S: SHORT PIN(3.0)
- > G: Convex bottom F: Flat bottom
- > Color: RD(Red) BU(Blue) BK(Black)
- > No. of poles: 01~12P
- > MODEL

5	Contact	Copper alloy	Au Plated	GENERAL TOLERANCE	ANGLE TOLERANCE	DORABO 宁波地博电气有限公司 NINGBO DORABO ELECTRICAL CO., LTD NAME: DP-XXP-C-XX			
4	Tape Sealed	Polyester Film	/	X. ±0.5 .X ±0.3 .XX ±0.1	X° ±5° .X° ±3° .XX° ±1°				
3	Base	PBT	UL94V-0	DRFT: ENK 2025.02.27	DRAWING NO.: DB0021040012	REV	MO		
2	Cover	PBT(Blue/Red/Black)	UL94V-0	SIZE: A4	TYPE: CUSTOMER_DRAWING	SCALE:	SHEET	1/1	
1	Button	PBT	UL94V-0						
NO	NAME OF PART	MATERIAL	NOTES						