
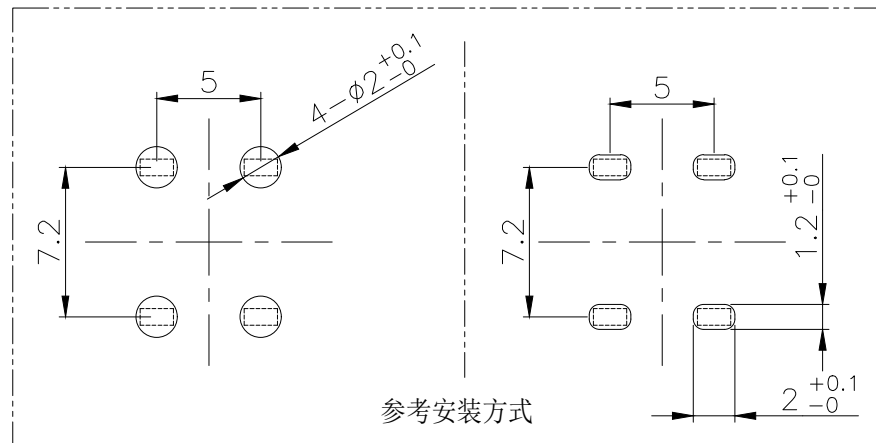


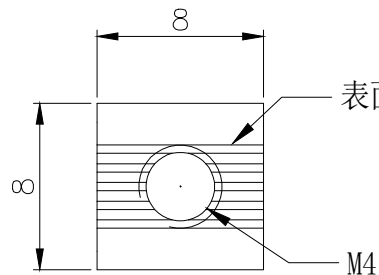

NOTES:

备注

1. Copper, nickel base, matte tin
黄铜, 镍底, 镀雾锡




2. Wire screw hole M4
压线螺孔M4

3. Current Rating: 45A
额定电流: 45A

4. There shall be no defects such as
pin deformation and burrs.

不得有脚变形, 毛刺等缺陷

5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

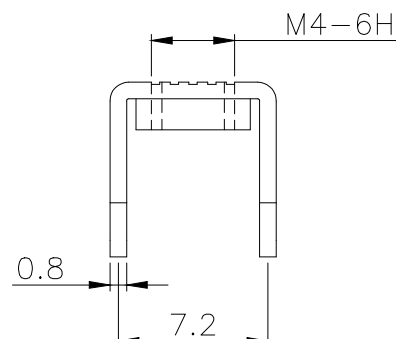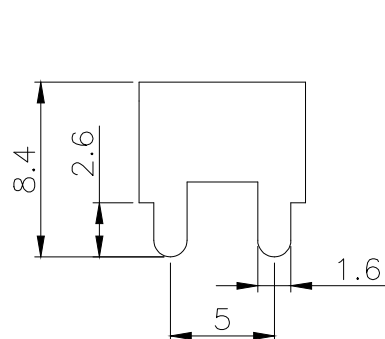

Ordering Information

HC - * * * - * * * - D * * * * - 01

Type	Screw Thread	Welding Feet	Series	D-BIP	Product No.	Material
M-Pull Teeth (铆牙)	S-M4 (铆牙)	0808-8x8mm (焊脚)	163D-16x20mm	S-SMT FD-Flag Dip	产品序号	默认-Copper (黄铜) RC-Ret Copper (紫铜)
BN-Rivet Nut (铆螺母)	4-M4 (铆牙)	2-2个				
RG-Rivet Gasket (铆垫片)	S-M5 (铆牙)	4-4个				
	6-M6 (铆牙)	6-6个				
		8-8个				

			GENERAL TOLERANCE	制图 DRAWING	01	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核 CHECK		产品名称 TITLE	PCB 焊接端子 插板 铆螺母 M4 4焊脚 8x8x8.4mm	版本 REV.	A
			5 or more ±0.35	批准 APPROVAL		产品料号 PART NO.	HC-RN44-0808-D001RC-01	单位 UNITS	mm
1	初版发行		2~5 ±0.25	比例 SCALE		材料		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	0~2 ±0.15	投影 Projection					
			Angle ±3.0°						