


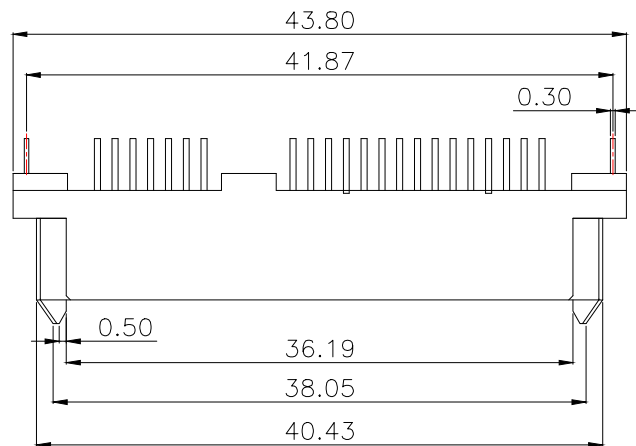

NOTE:

1. MATERIAL:

HOUSING: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.

CONTACTS: PHOSPHOR BRONZE.




BORAD LOCK: COPPER ALLOY.

2. FINISH:

CONTACTS: GOLD FLASH PLATED ON CONTACT AREA, [100μ"] MIN..

BRIGHT-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT
UNDERPLATED [50μ"] MIN.. NICKEL.

BORAD LOCK: [100μ"] MIN. TIN OVER[50μ"]MIN. NICKEL PLATED.

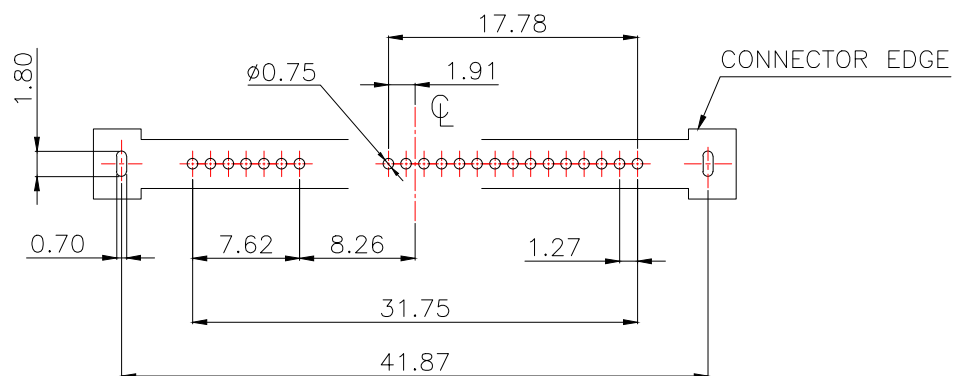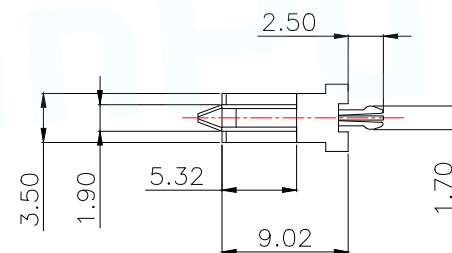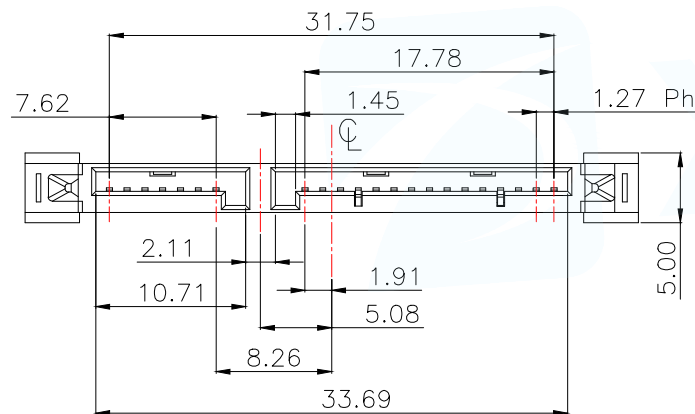


RECOMMEND PCB LAYOUT (T=1.6)
PCB TOLERANCE:±0.05

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: SATA 7+15P 长体半180度DIP
			PAR SATA-050-F22SS1BY-A
DECIMALS:	ANGLES:		DWN
X.X±0.30	X.*±5°		CHKD
X.XX±0.25	X.X*±2°		APVD
X.XXX±0.15	X.XX*±1°		SCALE N:A
CUSTOMER COPY		SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A



- 1-1 将SATA 产品整齐的装入真空盒底盒内。
1-2 将真空盒盖在装有成品的底盒上, 以免产品漏失。

备注: 每盘装成品50PCS
真空壳规格: 长245*宽245*高10CM

TOP COVER




TRAY LAYOUT




- 2-1 每箱分2扎装, 每层放盖子1PCS; 每扎共20盘, 用PE膜扎成一扎; 每箱的数量小计:
 $(50*20) + (50*20) = 2000CS$

BIG PE BAG

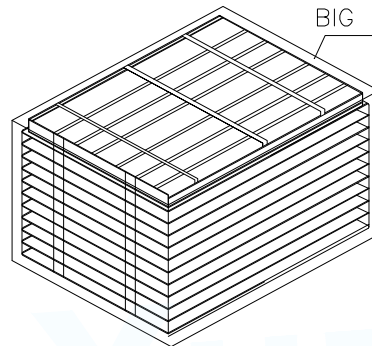


- 3-1 将2捆成品依次放入纸箱内. 备注:
纸箱规格: 长52*宽26*高22CM K=A

2000PCS/CARTON

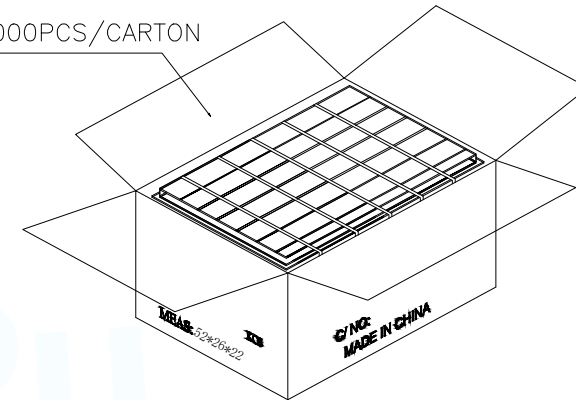

- 4-1 纸箱开口处以透明胶带贴合。
4-2 若有未装满的零数箱, 必须以缓冲材塞满。

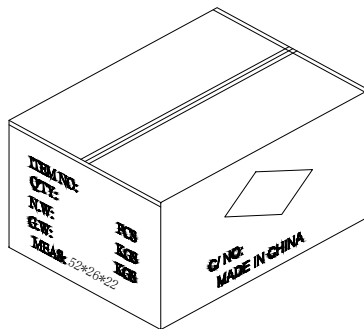

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES				TITLE:	
				SATA 7+15P 长体单排180度DIP	
				PAR	SATA-050-F22SS1BY-A
				DWN	
DECIMALS:	ANGLES:			CHKD	
X.X±0.30	X.*±5°			APVD	
X.XX±0.25	X.X°±2°			SCALE N:A	UNIT:MM
X.XXX±0.15	X.XX°±1°			SIZE:A4	UNIT:MM
CUSTOMER COPY		SHEET:1F1		REV:A	