


| REV. | DESCRIPTION/ECO NO.      | DATE    |
|------|--------------------------|---------|
|      | RELEASED                 | 5/17/00 |
| A    | DELETE #S 331, 375, FF48 | 8/3/05  |
| B    | 385 UPDATE RATINGS       | 6/11/09 |
|      |                          |         |
|      |                          |         |
|      |                          |         |
|      |                          |         |

| JKL LAMP NUMBER | VOLTS RATED | AMPS ±10% | MSCP ±25% | LUMENS ±25% | AVERAGE LIFE HRS. | FILAMENT TYPE |
|-----------------|-------------|-----------|-----------|-------------|-------------------|---------------|
| 368             | 2.5         | .200      | .200      | 2.51        | 500               | C-2R          |
| 268             | 2.5         | .350      | .200      | 2.51        | 20,000            | C-2R          |
| 252             | 2.5         | .350      | LENS END  |             | 20,000            | C-2R          |
| 338             | 2.7         | .060      | .040      | 0.50        | 6,000             | C-2R          |
| FF23            | 5.0         | .020      | .020      | 0.25        | 50,000            | C-2R          |
| FF90            | 5.0         | .021      | .034      | 0.43        | 10,000            | C-2R          |
| 7332            | 5.0         | .060      | .030      | 0.38        | 100,000           | C-2R          |
| 7333            | 5.0         | .060      | .050      | 0.63        | 100,000           | C-2R          |
| 3150            | 5.0         | .060      | .150      | 1.89        | 5,000             | C-2R          |
| 7335            | 5.0         | .115      | .150      | 1.89        | 40,000            | C-2R          |
| 345             | 6.0         | .040      | .030      | 0.38        | 10,000            | C-2V          |
| 328             | 6.0         | .200      | .630      | 7.92        | 1,000             | C-2R          |
| 380             | 6.3         | .040      | .030      | 0.38        | 20,000            | C-2F          |
| 377             | 6.3         | .075      | .230      | 2.89        | 1,000             | C-2R          |
| 350             | 6.3         | .150      | .450      | 5.66        | 3,000             | C-2R          |
| 381             | 6.3         | .200      | .400      | 5.03        | 50,000            | C-2F          |
| 349             | 6.3         | .200      | .550      | 6.91        | 5,000             | C-2R          |
| 344             | 10.0        | .014      | .002      | 0.03        | 50,000            | C-2F          |
| 367             | 10.0        | .040      | .080      | 1.01        | 30,000            | C-2F          |
| 394             | 12.0        | .040      | .120      | 1.51        | 10,000            | C-2F          |
| 382             | 14.0        | .080      | .300      | 3.77        | 50,000            | C-2F          |
| 330             | 14.0        | .080      | .500      | 6.29        | 2,500             | C-2F          |
| 8918            | 14.0        | .100      | .500      | 6.29        | 50,000            | C-2F          |
| 370             | 18.0        | .040      | .150      | 1.89        | 10,000            | C-2F          |
| 459             | 22.0        | .040      | .300      | 3.77        | 2,000             | C-2F          |
| 8176            | 24.0        | .050      | .500      | 6.29        | 2,000             | C-2F          |
| FF28            | 28.0        | .024      | .150      | 1.89        | 16,000            | C-2F          |
| 385             | 28.0        | .040      | .150      | 1.89        | 20,000            | C-2F          |
| 387             | 28.0        | .040      | .300      | 3.77        | 25,000            | C-2F          |
| 327             | 28.0        | .040      | .340      | 4.27        | 4,000             | C-2F          |
| 376             | 28.0        | .060      | .340      | 4.27        | 25,000            | C-2F          |
| 7341            | 28.0        | .065      | .650      | 8.17        | 5,000             | C-2F          |
| 269             | 32.0        | .040      | .340      | 4.27        | 20,000            | C-2F          |

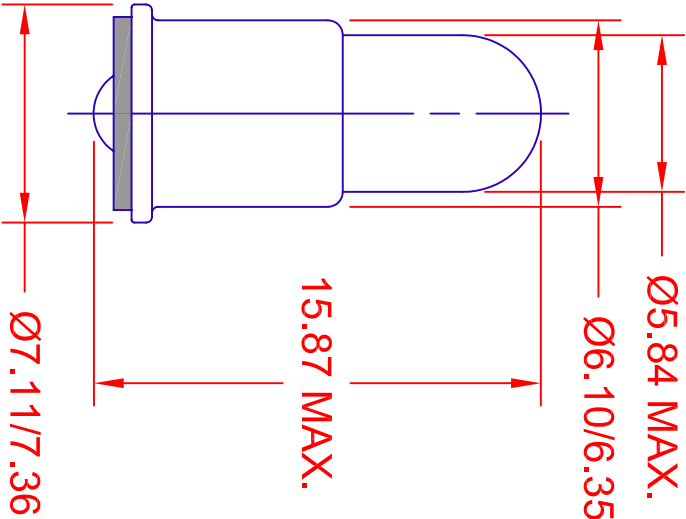

| METRIC                                                                              | DIMENSIONS ARE IN MILLIMETERS        |                                              | TITLE                          |                             |
|-------------------------------------------------------------------------------------|--------------------------------------|----------------------------------------------|--------------------------------|-----------------------------|
|                                                                                     | TOLERANCE UNLESS OTHERWISE SPECIFIED |                                              | T-1 3/4 STANDARD MIDGET FLANGE |                             |
|  | THIRD ANGLE PROJECTION               | 1 PL +/- 0.2<br>2 PL +/- 0.20<br>ANGLE +/- 0 | FLANGE T-1 3/4                 |                             |
| DRAWN BY<br>L. WENGSTROM                                                            | APPROVED BY<br>L.W.                  | DATE<br>6/11/09                              | SIZE<br>A                      | FSCM NO.<br>55335           |
| - CAD DRAWING -                                                                     |                                      | SCALE<br>NONE                                | RELEASED<br>DATE<br>5/17/00    | REVISION<br>DATE<br>6/11/09 |
| MANUAL REVISIONS NOT PERMITTED                                                      |                                      | REV.<br>NO.<br>B                             | SHEET<br>1 OF 1                |                             |