

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
150V	$6.7m\Omega@10V$	140A



合肥矽普半导体

Siliup Semiconductor Technology Co., Ltd

技术 品质 服务

www.siliup.com


Feature

- Fast Switching
- Low Gate Charge and $R_{DS(on)}$
- Advanced Split Gate Trench Technology
- 100% Single Pulse avalanche energy Test


Applications

- Power switching application
- DC-DC Converter
- Power Management


Package

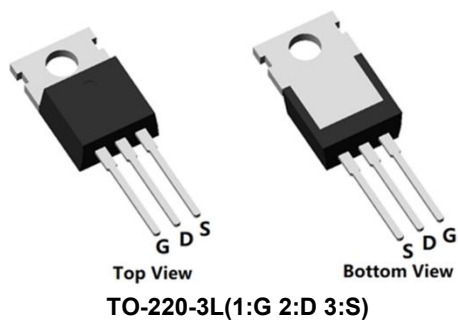

Circuit diagram



Marking

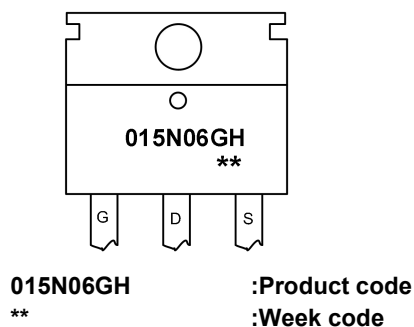

Order Information

Device	Package	Unit/Tube
SP015N06GHTQ	TO-220-3L	50

Absolute maximum ratings (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	150	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current (Tc=25°C)	I_D	140	A
Continuous Drain Current (Tc=100°C)	I_D	95	A
Pulsed Drain Current	I_{DM}	560	A
Single Pulse Avalanche Energy ¹	E_{AS}	812	mJ
Power Dissipation (Tc=25°C)	P_D	230	W
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	0.54	°C/W
Storage Temperature Range	T_{STG}	-55 to 150	°C
Operating Junction Temperature Range	T_J	-55 to 150	°C


Electrical characteristics (Ta=25°C, unless otherwise noted)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$ID = 250\mu A, VGS = 0V$	150	-	-	V
Drain Cut-Off Current	$IDSS$	$VDS = 120V, VGS = 0V$	-	-	1	μA
Gate Leakage Current	$IGSS$	$VGS = \pm 20V, VDS = 0V$	-	-	± 0.1	
Gate Threshold Voltage	$V_{GS(th)}$	$VDS = VGS, ID = 250\mu A$	2.0	3.0	4.0	V
Drain-Source ON Resistance	$R_{DS(ON)}$	$VGS = 10V, ID = 20A$	-	6.7	8.5	m Ω
Dynamic Characteristics						
Input Capacitance	C_{iss}	$VDS = 75V, VGS = 0V, f = 1.0MHz$	-	5240	-	pF
Output Capacitance	C_{oss}		-	430	-	
Reverse Transfer Capacitance	C_{rss}		-	14	-	
Total Gate Charge	Q_g	$VDS=75V, VGS=10V, ID=70A$	-	70	-	nC
Gate-Source Charge	Q_{gs}		-	31	-	
Gate-Drain Charge	Q_{gd}		-	20	-	
Switching Characteristics						
Turn-On Delay Time	$t_{d(on)}$	$VGS = 10V, VDS = 50V, ID = 70A$ $RG = 6\Omega$	-	24	-	nS
Rise Time	t_r		-	35	-	
Turn-Off Delay Time	$t_{d(off)}$		-	46	-	
Fall Time	t_f		-	15	-	
Drain-Source Body Diode Characteristics						
Source-Drain Diode Forward Voltage	V_{SD}	$I_S = 1A, VGS = 0V$	-	-	1.2	V
Maximum Body-Diode Continuous Current	I_S		-	-	140	A
Body Diode Reverse Recovery Time	T_{rr}	$I_S=50A, di/dt=100A/us, T_J=25^{\circ}C$	-	98	-	nS
Body Diode Reverse Recovery Charge	Q_{rr}		-	217	-	nC


Note :

1. The test condition is $V_{DD}=50V, V_{GS}=10V, L=0.5mH, RG=25\Omega$;


Typical Characteristics

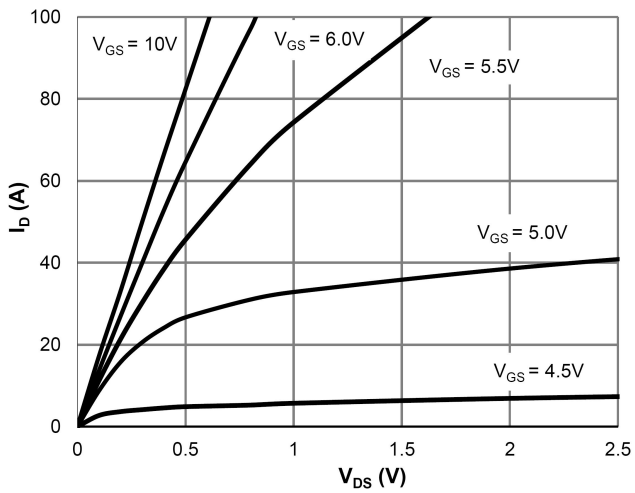


Saturation Characteristics

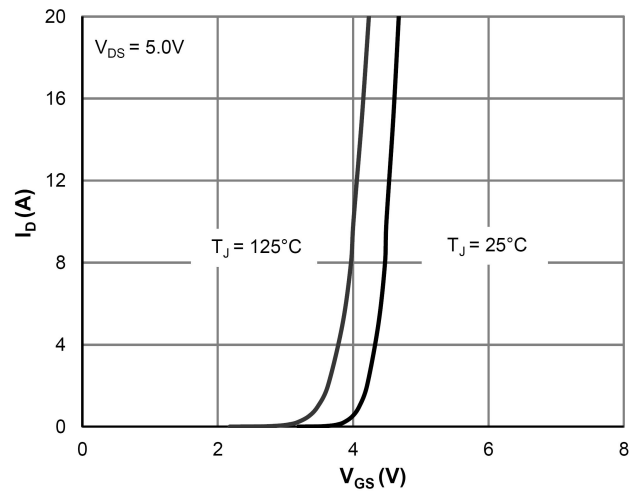


Transfer Characteristics

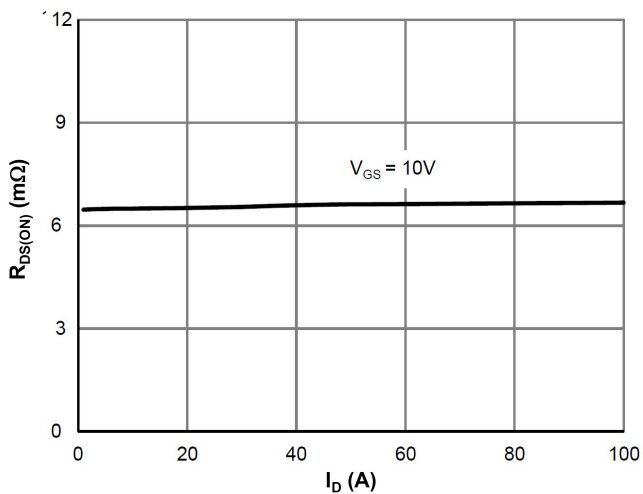


$R_{DS(on)}$ vs. Drain Current

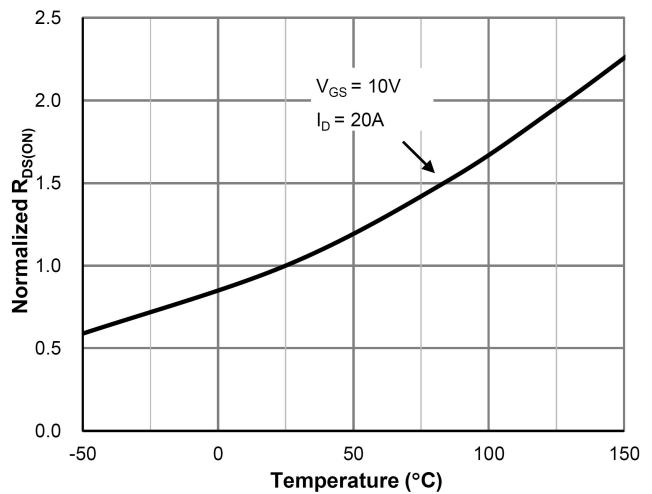


$R_{DS(on)}$ vs. Junction Temperature

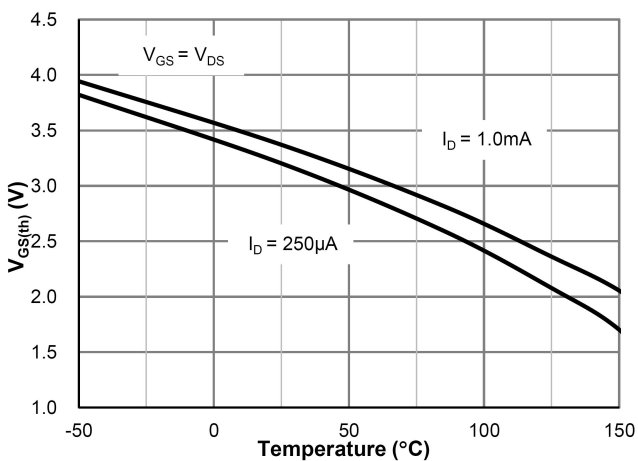


$V_{GS(th)}$ vs. Junction Temperature

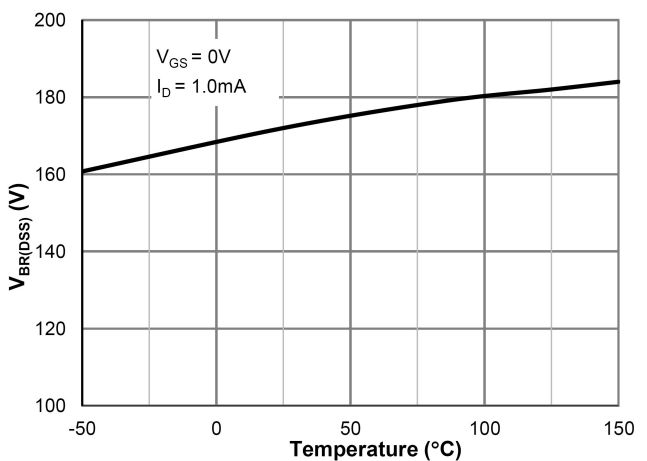


$V_{BR(DSS)}$ vs. Junction Temperature

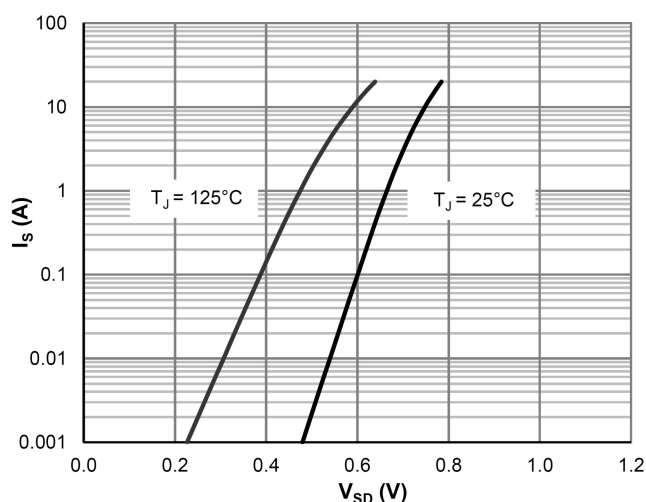


Body-Diode Characteristics

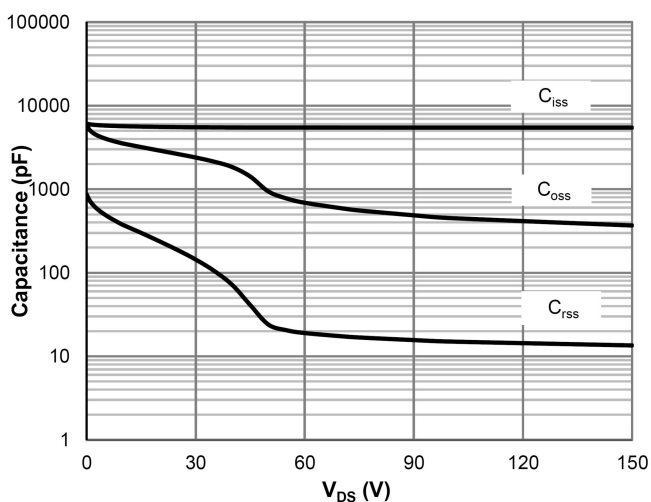


Capacitance Characteristics

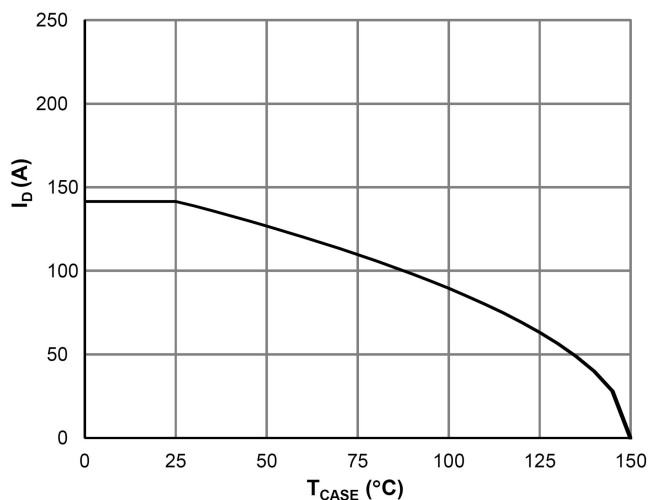


Current De-rating

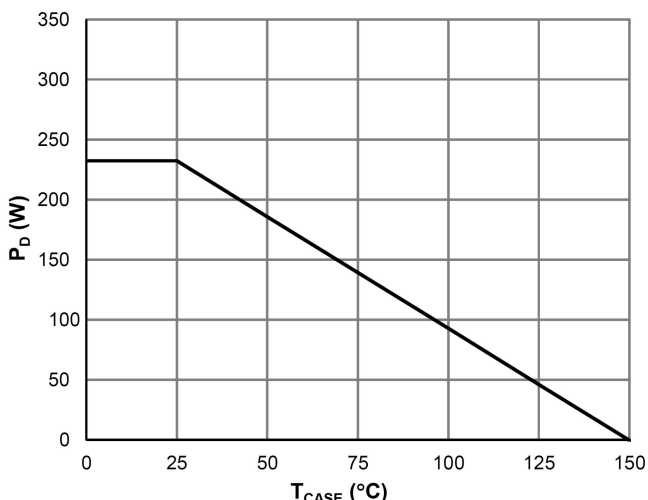


Power De-rating

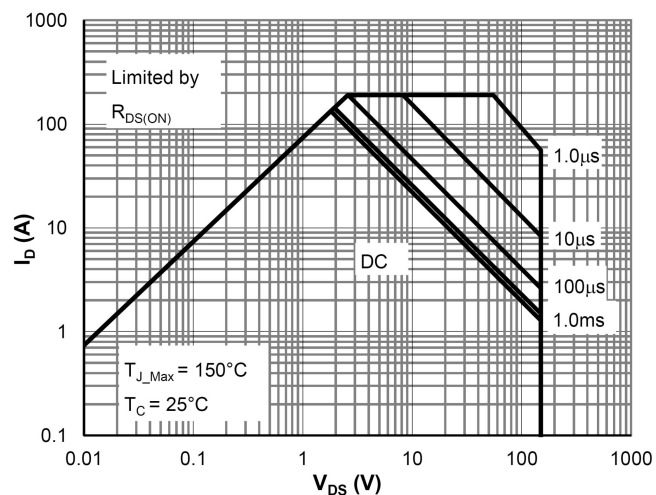


Maximum Safe Operating Area

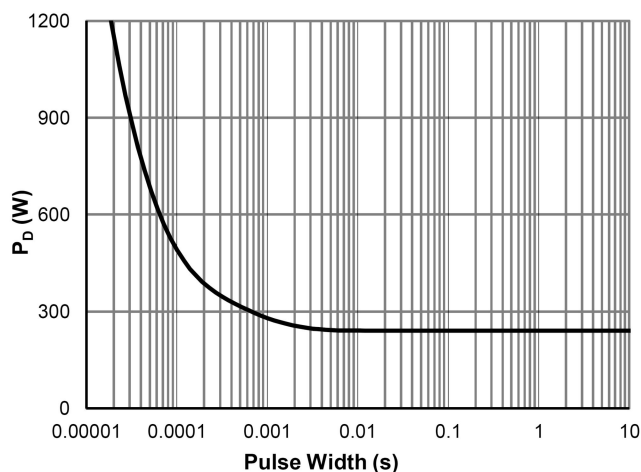

Single Pulse Power Rating, Junction-to-Case

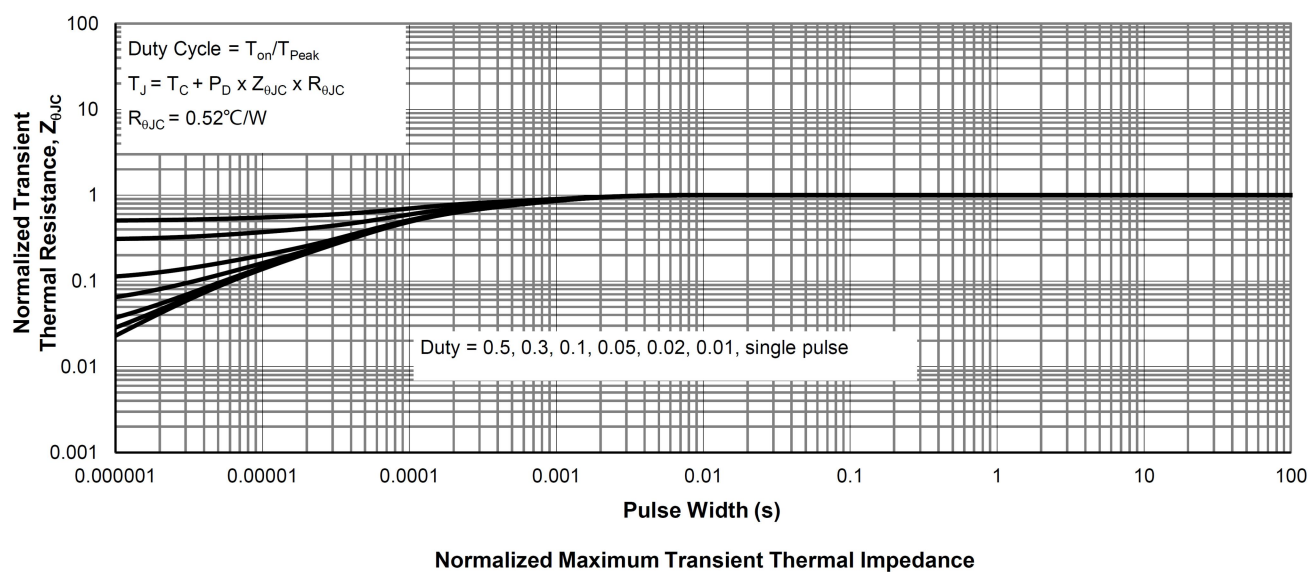

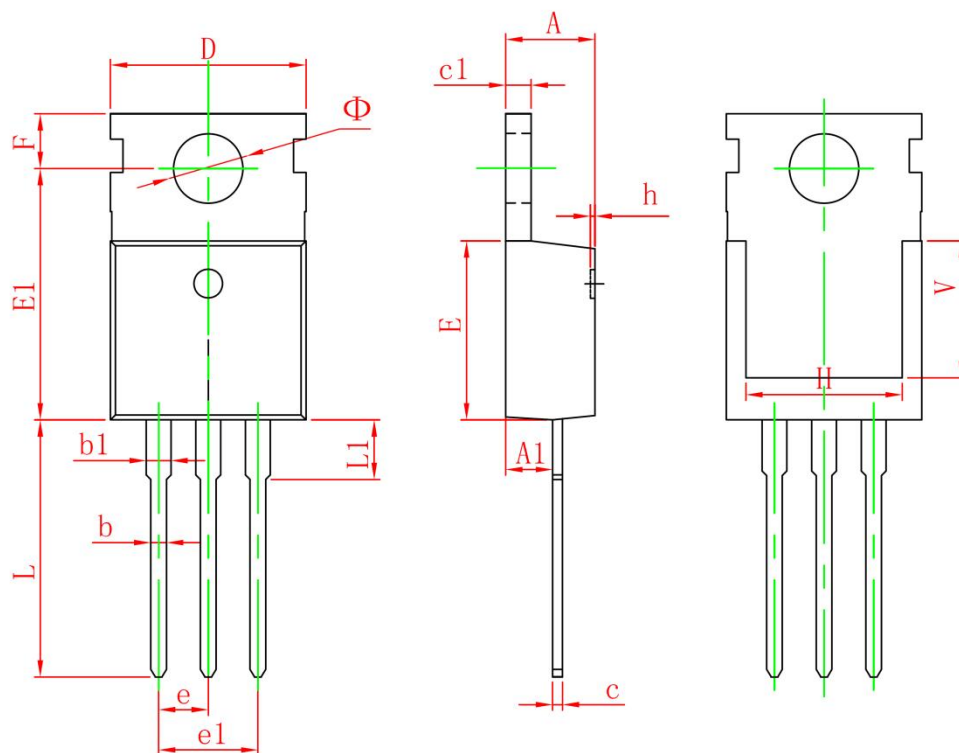TO-220-3L Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.400	4.600	0.173	0.181
A1	2.250	2.550	0.089	0.100
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.330	0.650	0.013	0.026
c1	1.200	1.400	0.047	0.055
D	9.910	10.250	0.390	0.404
E	8.950	9.750	0.352	0.384
E1	12.650	13.050	0.498	0.514
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
F	2.650	2.950	0.104	0.116
H	7.900	8.100	0.311	0.319
h	0.000	0.300	0.000	0.012
L	12.900	13.400	0.508	0.528
L1	2.850	3.250	0.112	0.128
V	6.900 REF.		0.276 REF.	
Φ	3.400	3.800	0.134	0.150