




## Features

- Low profile package
- Ideal for automated placement
- Complementary to DTA143ZM(PNP).
- Power Dissipation of 150mW
- High Stability and High Reliability
- RoHS Compliant

## Mechanical Data

- Package: SOT-723
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound.
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020
- Tape Reel :8000pcs

## Appearance & Symbol




Package: SOT-723

- 1: Base  
2: Emitter  
3: Collector


## Applications

- Amplifying signal
- Electronic switch
- Oscillating circuit
- Variable resistance

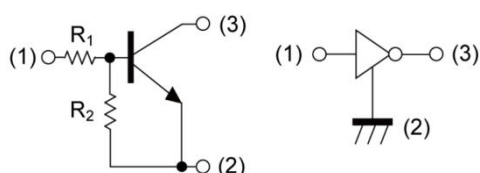

- (1) IN (BASE)  
(2) GND (EMITTER)  
(3) OUT (COLLECTOR)

## Marking Information



E23= Marking Code



## Absolute Maximum Ratings (T=25°C unless otherwise noted)

| Parameter                  | Symbol    | Value       | Units |
|----------------------------|-----------|-------------|-------|
| Supply Voltage             | $V_{CC}$  | 50          | V     |
| Input Voltage              | $V_{IN}$  | -5 to +30   | V     |
| Output Current             | $I_O$     | 100         | mA    |
| Peak Collector Current     | $I_{CM}$  | 200         | mA    |
| Power Dissipation          | $P_D$     | 150         | mW    |
| Junction Temperature Range | $T_J$     | -55 to +150 | °C    |
| Storage Temperature Range  | $T_{stg}$ | -55 to +150 | °C    |

| Parameter            | Symbol       | Test conditions              | Min  | Typ | Max  | Unit       |
|----------------------|--------------|------------------------------|------|-----|------|------------|
| Input voltage        | $V_{I(off)}$ | $V_{CC}=5V, I_O=100\mu A$    | 0.5  |     |      | V          |
|                      | $V_{I(on)}$  | $V_O=0.3V, I_O=5mA$          |      |     | 1.3  | V          |
| Output voltage       | $V_{O(on)}$  | $I_O/I_I=5mA/0.25mA$         |      | 100 | 300  | mV         |
| Input current        | $I_I$        | $V_I=5V$                     |      |     | 1.8  | mA         |
| Output current       | $I_{O(off)}$ | $V_{CC}=50V, V_I=0V$         |      |     | 500  | nA         |
| DC current gain      | $G_I$        | $V_O=5V, I_O=10mA$           | 80   |     |      |            |
| Input resistance     | $R_1$        |                              | 3.29 | 4.7 | 6.11 | k $\Omega$ |
| Resistance ratio     | $R_2/R_1$    |                              | 8    | 10  | 12   |            |
| Transition frequency | $f_T$        | $V_O=10V, I_O=5mA, f=100MHz$ |      | 250 |      | MHz        |



## Typical Characteristics

Fig.1 Input voltage vs. output current (ON characteristics)

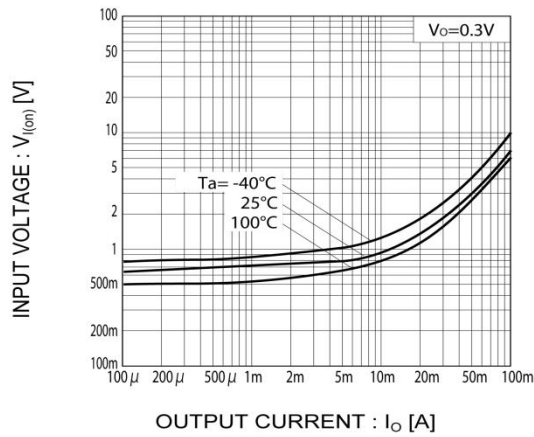


Fig.2 Output current vs. input voltage (OFF characteristics)

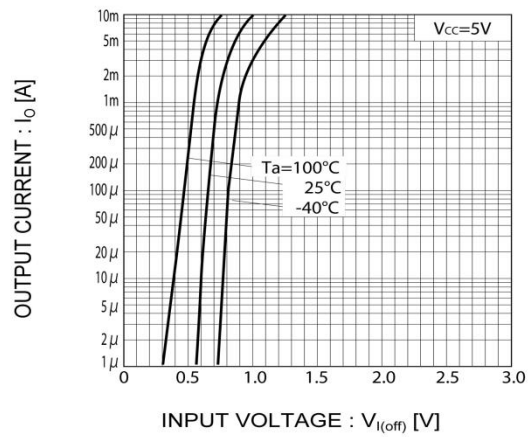


Fig.3 Output current vs. output voltage

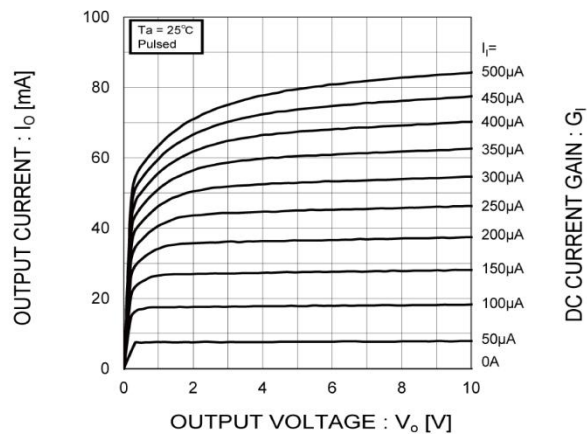


Fig.4 DC current gain vs. output current


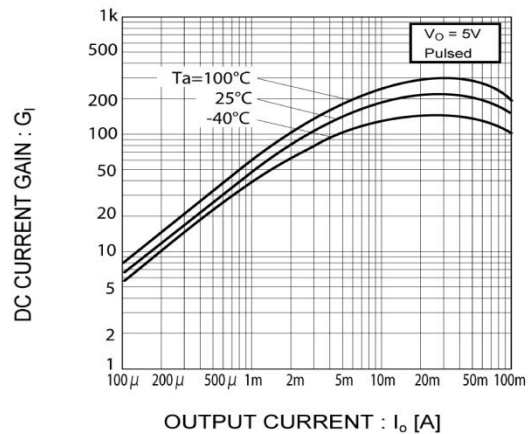



Fig.5 Output voltage vs. output current



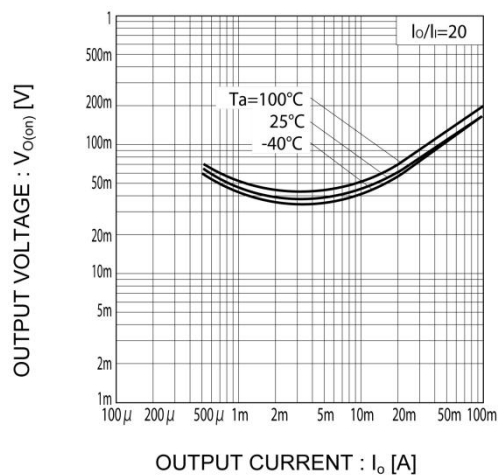


### Soldering parameters

| Reflow Condition                                        |                                   | Pb-Free assembly<br>see as bellow |
|---------------------------------------------------------|-----------------------------------|-----------------------------------|
| Pre Heat                                                | -Temperature Min ( $T_{s(min)}$ ) | +150°C                            |
|                                                         | -Temperature Max( $T_{s(max)}$ )  | +200°C                            |
|                                                         | -Time (Min to Max) ( $t_s$ )      | 60-180 secs.                      |
| Average ramp up rate (Liquid us Temp ( $T_L$ ) to peak) |                                   | 3°C/sec. Max                      |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                    |                                   | 3°C/sec. Max                      |
| Reflow                                                  | -Temperature( $T_L$ ) (Liquid us) | +217°C                            |
|                                                         | -Temperature( $t_L$ )             | 60-150 secs.                      |
| Peak Temp ( $T_p$ )                                     |                                   | +260(+0/-5)°C                     |
| Time within 5°C of actual Peak Temp ( $t_p$ )           |                                   | 30 secs. Max                      |
| Ramp-down Rate                                          |                                   | 6°C/sec. Max                      |
| Time 25°C to Peak Temp ( $T_p$ )                        |                                   | 8 min. Max                        |
| Do not exceed                                           |                                   | +260°C                            |

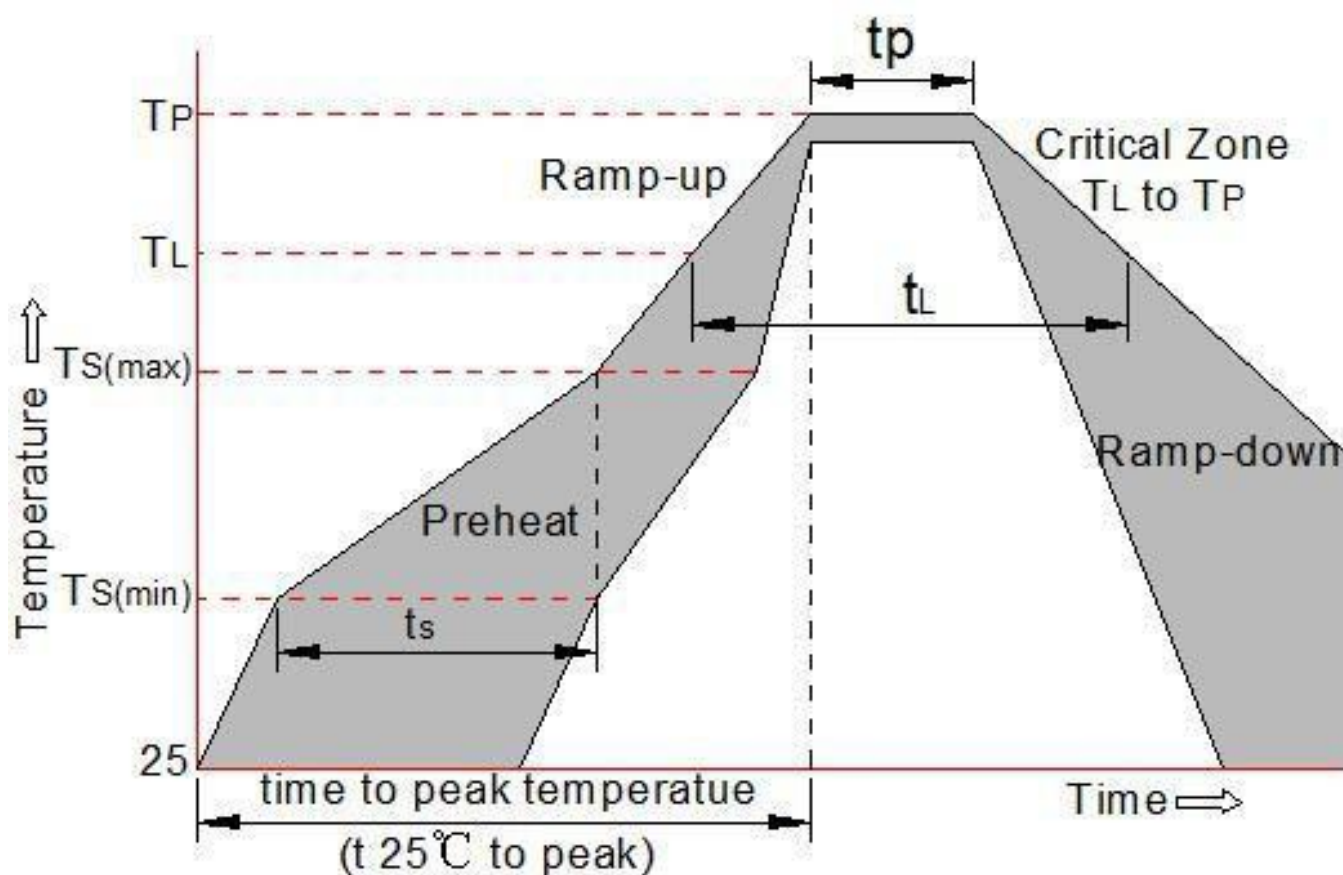


## Package mechanical data

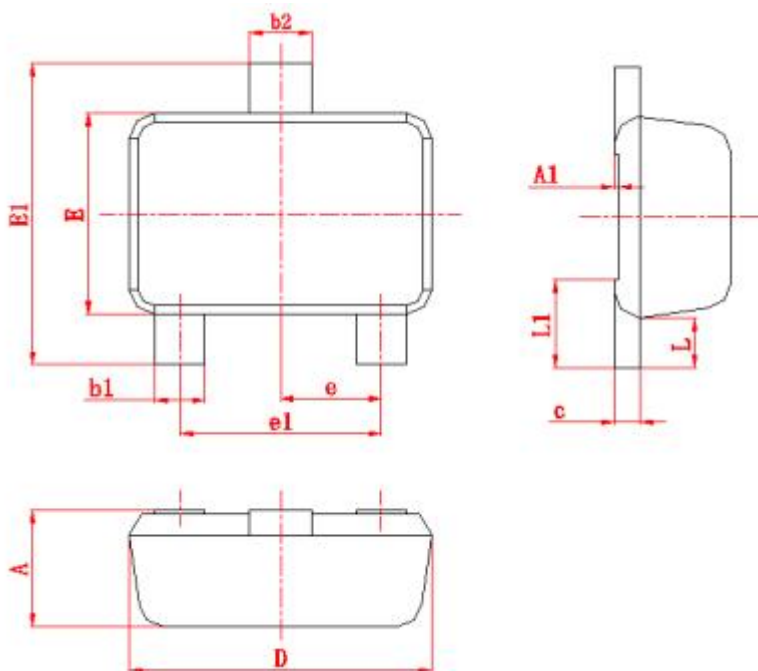

| Symbol | Dimension in Millimeters |      |
|--------|--------------------------|------|
|        | min                      | max  |
| A      | 0.43                     | 0.5  |
| A1     | 0                        | 0.05 |
| D      | 1.15                     | 1.25 |
| E      | 0.75                     | 0.85 |
| E1     | 1.15                     | 1.25 |
| e      | (0.4)                    |      |
| e1     | 0.7                      | 0.9  |
| b1     | 0.15                     | 0.25 |
| b2     | 0.25                     | 0.35 |
| c      | 0.08                     | 0.15 |
| L      | 0.12                     | 0.28 |
| L1     | (0.3)                    |      |

## Suggested Land Pattern

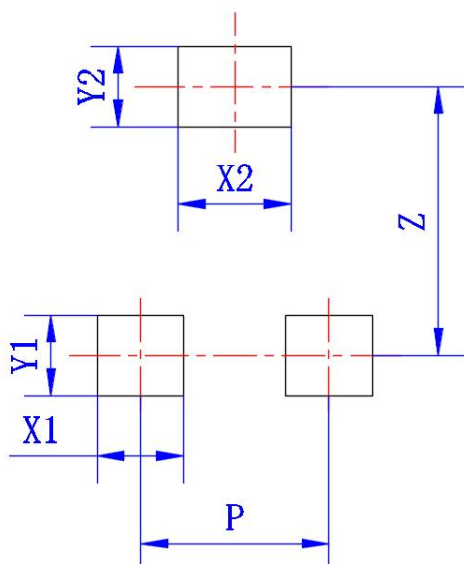

| Symbol | Dimension in Millimeters |
|--------|--------------------------|
|        | typ                      |
| X1     | (0.4)                    |
| X2     | (0.45)                   |
| Y1     | (0.4)                    |
| Y2     | (0.4)                    |
| P      | (0.8)                    |
| Z      | (1.1)                    |