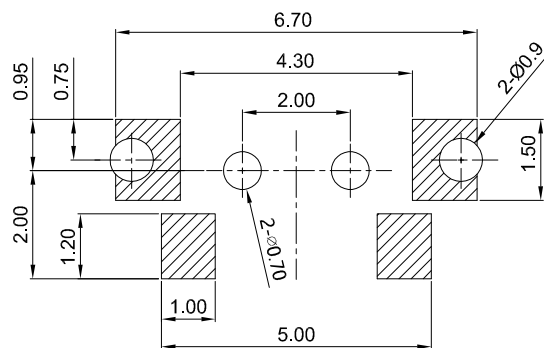
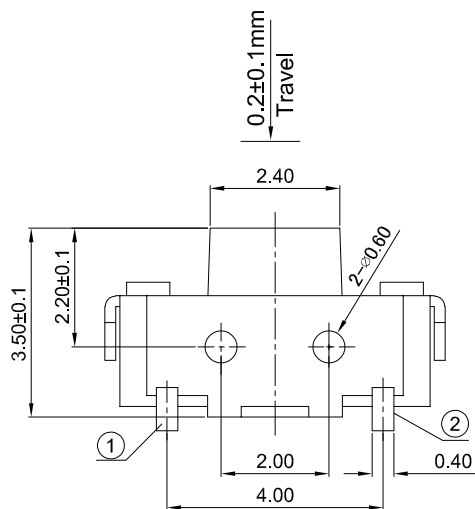





GT-TA208B-H035-L1

G-Switch

Operating Force
A=180gf
B=260gf

Switch Height (mm)
H035=3.5mm

Switch lifetime
L05=50,000 Cycles
L1=100,000 Cycles

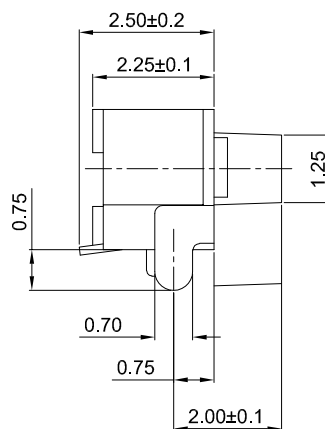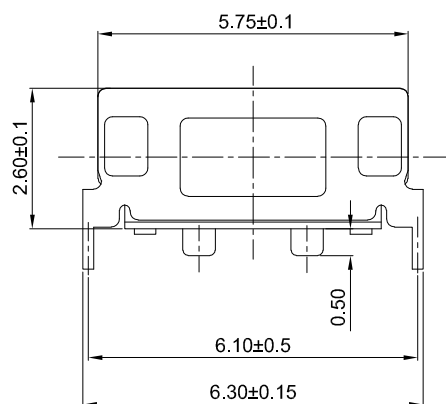

CIRCUIT DIAGRAM

G-Switch Specification:

Operating temperature range: -40℃to+85℃
Rating: 50mA, 12V DC
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V AC for 1 min
Contact resistance: 100m Ω max.
Travel: 0.20±0.1mm

5	COVER	STAINLESS STEEL	
4	BUTTON	HIGH TEMPERATURE PLASTIC	BLACK
3	CONTACT	STAINLESS STEEL	Ag PLATING
2	TERMINAL	COPPER ALLOY	Ag PLATING
1	BASE	HIGH TEMPERATURE PLASTIC	BLACK
NO.	PART NAME	MATERIAL	REMARK



RoHS
Compliant
2002/95/EC



SCALE: 7:1 UNIT: mm
SIZE: A4

Unless otherwise
General Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

Title: Horizontal Tact Switch
SMT 5.75×2.6×3.5mm

Molde Code: GT-TA208B-H035-L1

DRAWN	CHECKED	APPROVED	DATE
Xia	Chen	Chen	2023.02.01

品赞科技
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1