



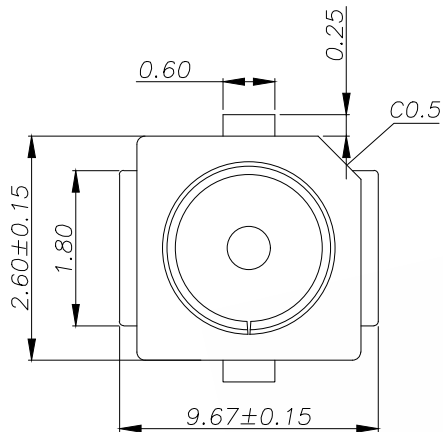
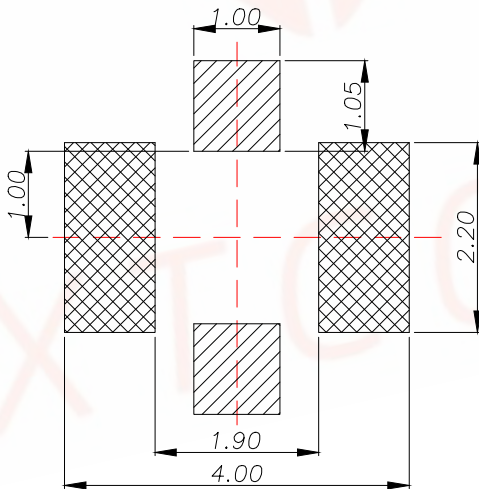


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



CENTER CONTACT

GROUND CONTACT

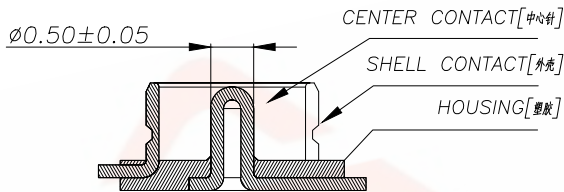

RECOMMENDED PCB LAYOUT
(TOLERANCE:±0.05)

NOTES

- 1.0. RATING(额定值) :
- 1.1. VOITAGE(电压) :60 VAC (R.M.S.)

1.2. NOMINAL CHARACTERISTIC IMPEDANCE(特性阻抗) : 50 Ohm

1.3. APPLICABLE FREQUENCY(适用频率) : DC ~ 6GHz

1.4. VSWR(电压驻波比) : 1.3 MAX. (DC~3GHz), 1.5 MAX. (3~6GHz)

1.5. TEMPERATURE(适用温度) : -40°C TO +85°C


1.6. APPLIED TO IR SOLDERING PROCESS(适用回流焊接方式)
- 2.0. MATERIAL SEE BILL OF MATERIAL (材料清单):
- 2.1.HOUSING(塑胶): THERMOPLASTIC LCP,UL94V-0(LCP符合UL94V-0),

2.2.CENTER CONTACT: COPPER ALLOY C5191

2.3.SHELL CONTACT(外壳): COPPER ALLOY C5191(铜合金C5191) .



TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
X.X:±0.15	X.*:±2°	PART NO. AIPEX-2	TITLE: MICRO RF I BAORD SMT 4 PADS TYPE		
X.XX:±0.05	X.X':±1°				
X.XXX:±0.05		DESIGN: Ethan	MANUFACTURE DWG		
UNITS	mm	CHED: Olvia			
MATERILA	---	APPD: Ava		SCALE	SHEET
FINISH	---			N:A	1/1


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

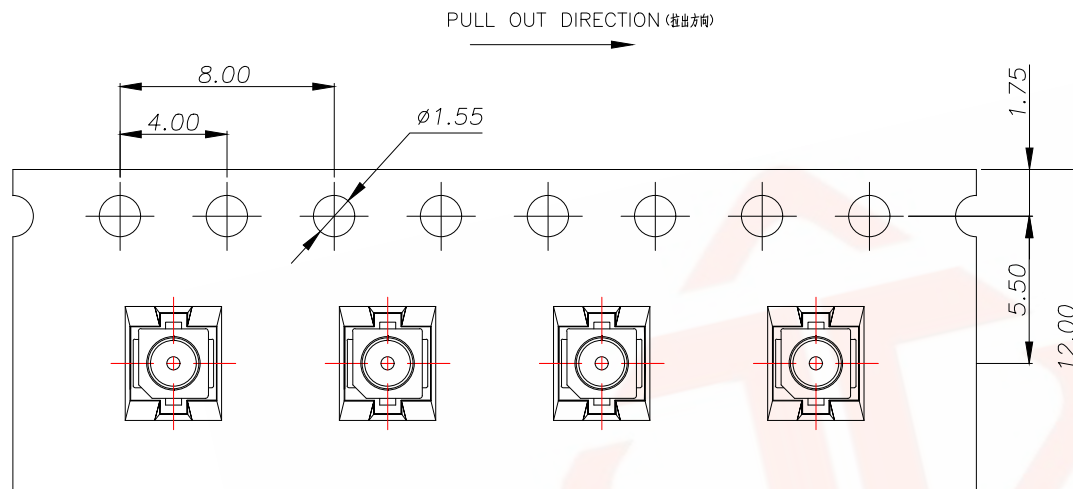

NOTES(备注):

- MATERIAL(材料):
 - EMBOSSED CARRIER(载带): PET
 - COVER TAPE(盖带): PET
 - REEL(卷盘): PS
 - SHIPPING CARTON(包装箱): CORRUGATED FIBER(多层瓦楞纸)
- DIMENSION(尺寸):
 - REEL(卷盘): W=12.5
 - SHIPPING CARTON(包装箱): L=350, W=350, H=190
- QUANTITY(数量):
 - PRIMARY PACKING(基本包装): 5000PCS/REEL
 - CRITERION PACKING(标准包装): 10REELS/CARTON(10卷/箱50000PCS)
- WEIGHT(重量):
 - NET WEIGHT(净重): 0.50KG/REEL.
 - GROSS WEIGHT(总重): 0.50KG/REEL, 5.5KG/CARTON.
- PEELING RESISTANCE(盖带剥离力): 10gf~130gf.

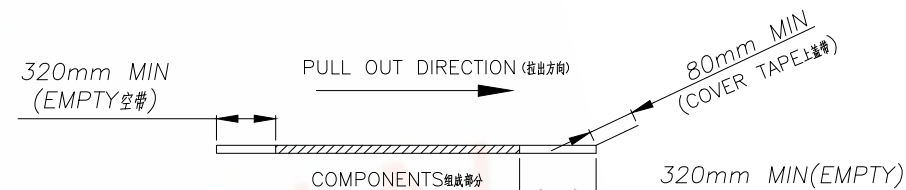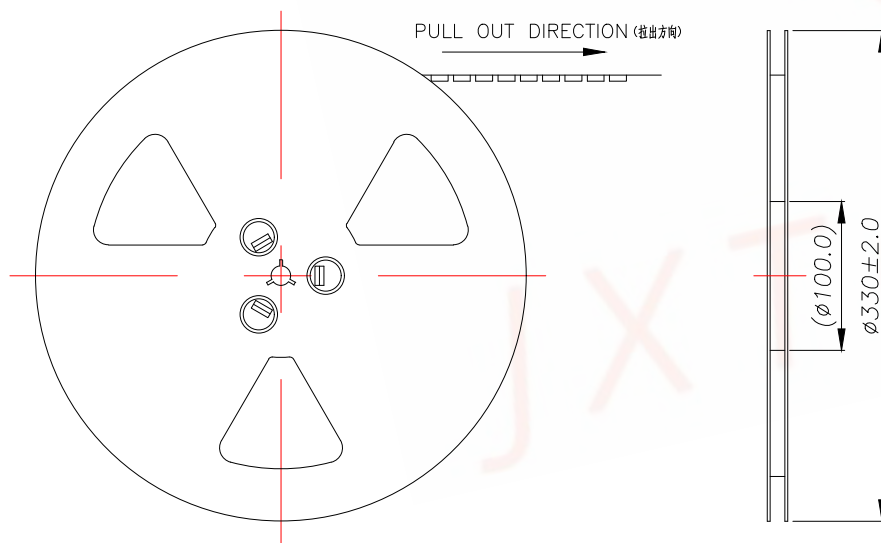

TOLERANCE		 深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
X.X:±0.15	X.°:±2°	PART NO. A/PEX-2	TITLE: MICRO RF 1 BAORD SMT 3 PADS TYPE		
X.XX:±0.05	X.X°:±1°				
X.XXX:±0.05					
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG		
MATERILA	— — —	CHED: Olvia			
FINISH	— — —	APPD: Ava			
				SCALE N:A	SHEET 1/1

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

品名 NAME: _____

料号 PART No.: _____


客户料号 CLIENT P/N: _____

客户订单 CLIENT PO#: _____


数量 Q'TY: _____ 重量 WEIGHT: _____

批次 LOT No.: _____

日期 DATE : _____

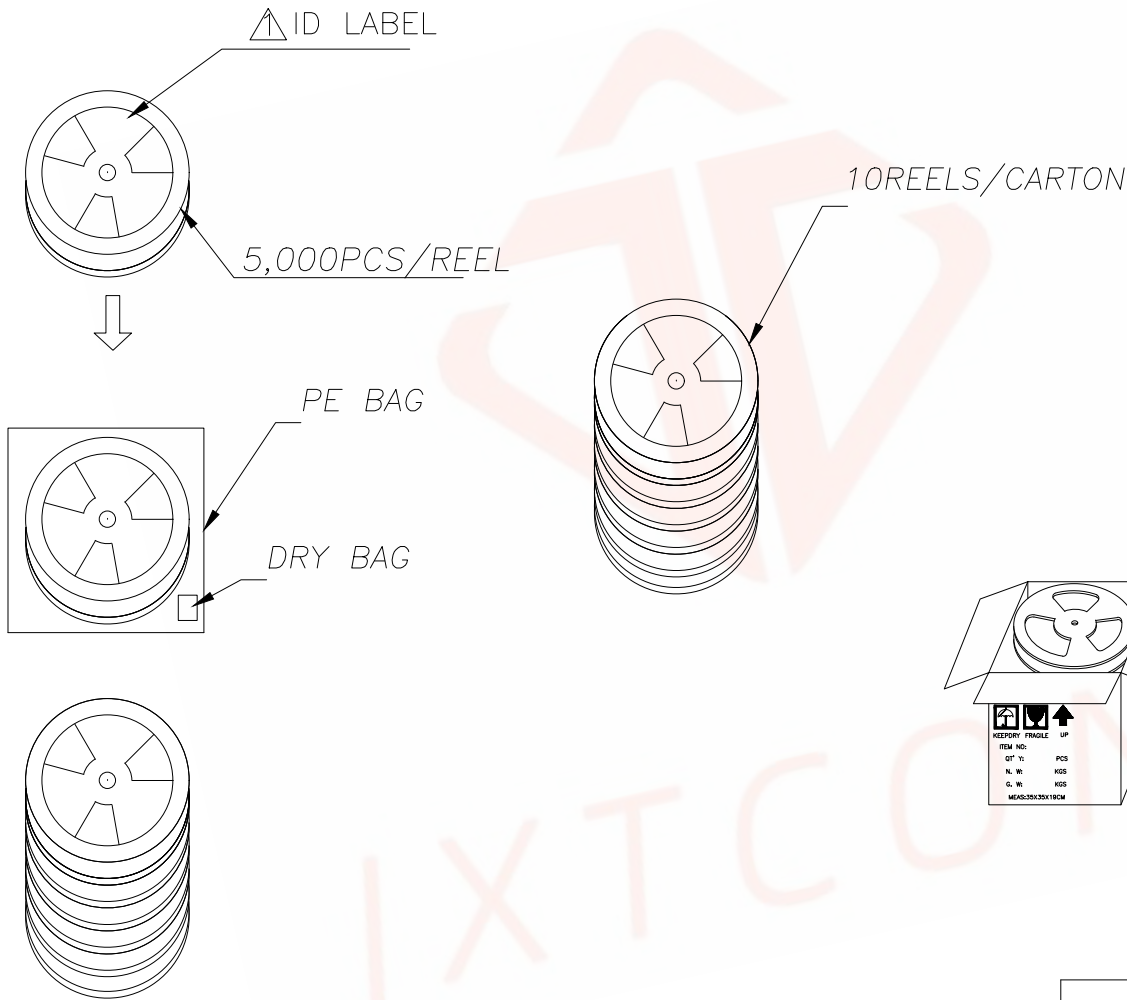

ID LABEL

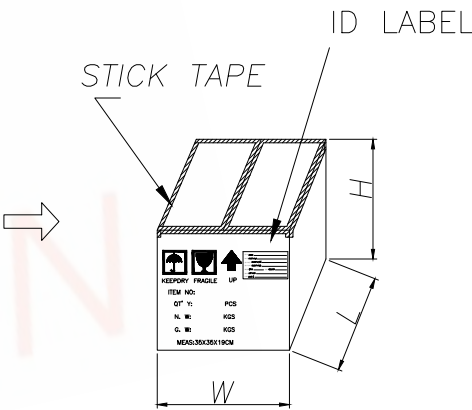

TOLERANCE		 深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd		
X.X:±0.15	X.*:±2*	PART NO. AIPEX-2	TITLE: MICRO RF I BAORD SMT 3 PADS TYPE	
X.XX:±0.05	X.X*:±1*			
X.XXX:±0.05				
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG	
MATERILA	— — —	CHED: Olvia		
FINISH	— — —	APPD: Ava		
				SCALE N:A
				SHEET 1/1