


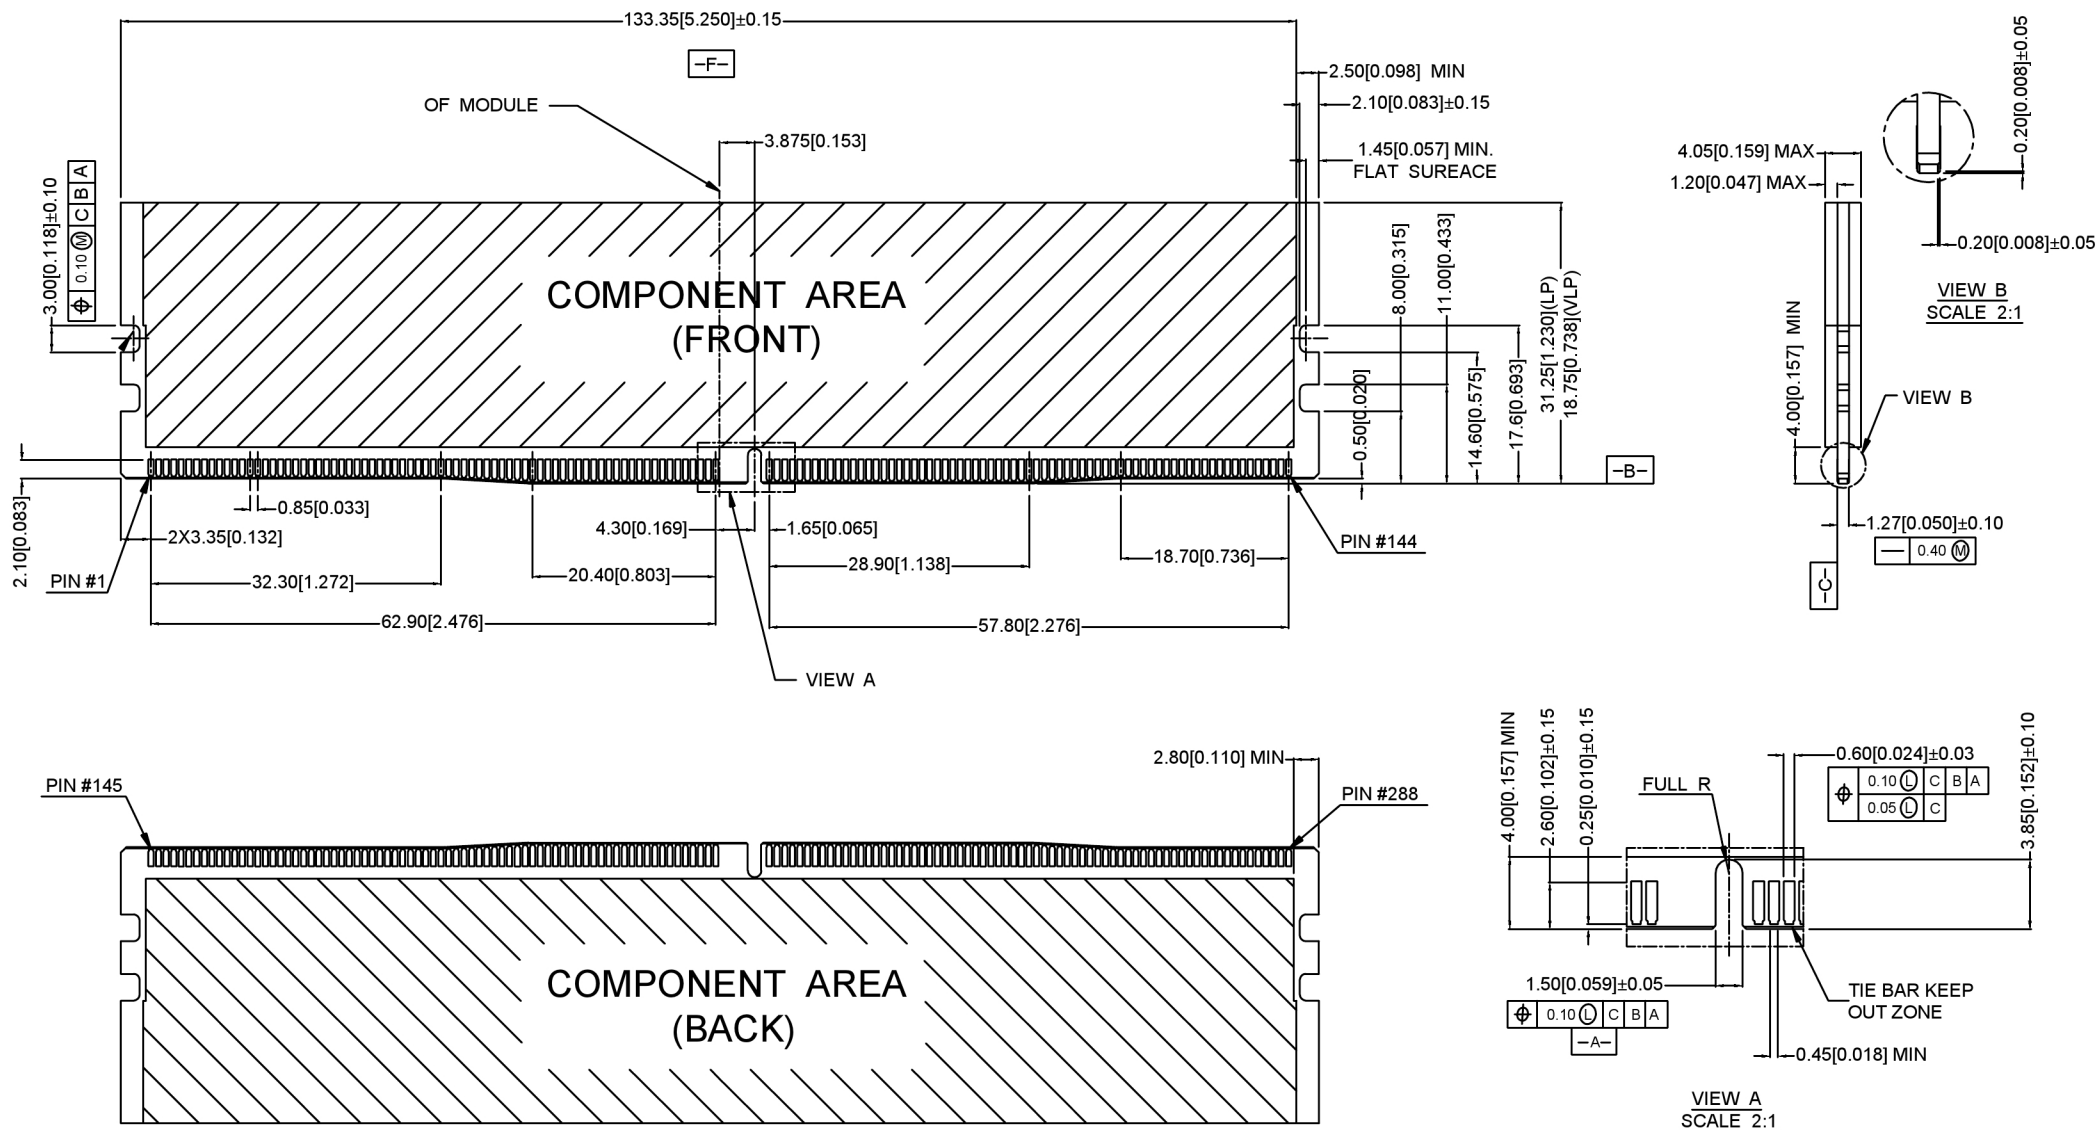

广东星坤科技股份有限公司


文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δ年					ANGLAR ±5°
Δ月					L ≤ 4 ±0.2
Δ日					4 < L ≤ 16 ±0.3
Δ数					16 < L ≤ 63 ±0.4
Δ数					L > 63 ±0.5
Δ数					UNSPECIFIED TOLERANCES

XKLB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	PART NO.: X9413WVS-288XX-9TV15
CHKD	UNIT: mm/in	DWG NO.: X-X9413WVS-288XX-9TV15
APPD	SIZE: A4	WEIGHT
		SHEET 1/1
		REVISION A0

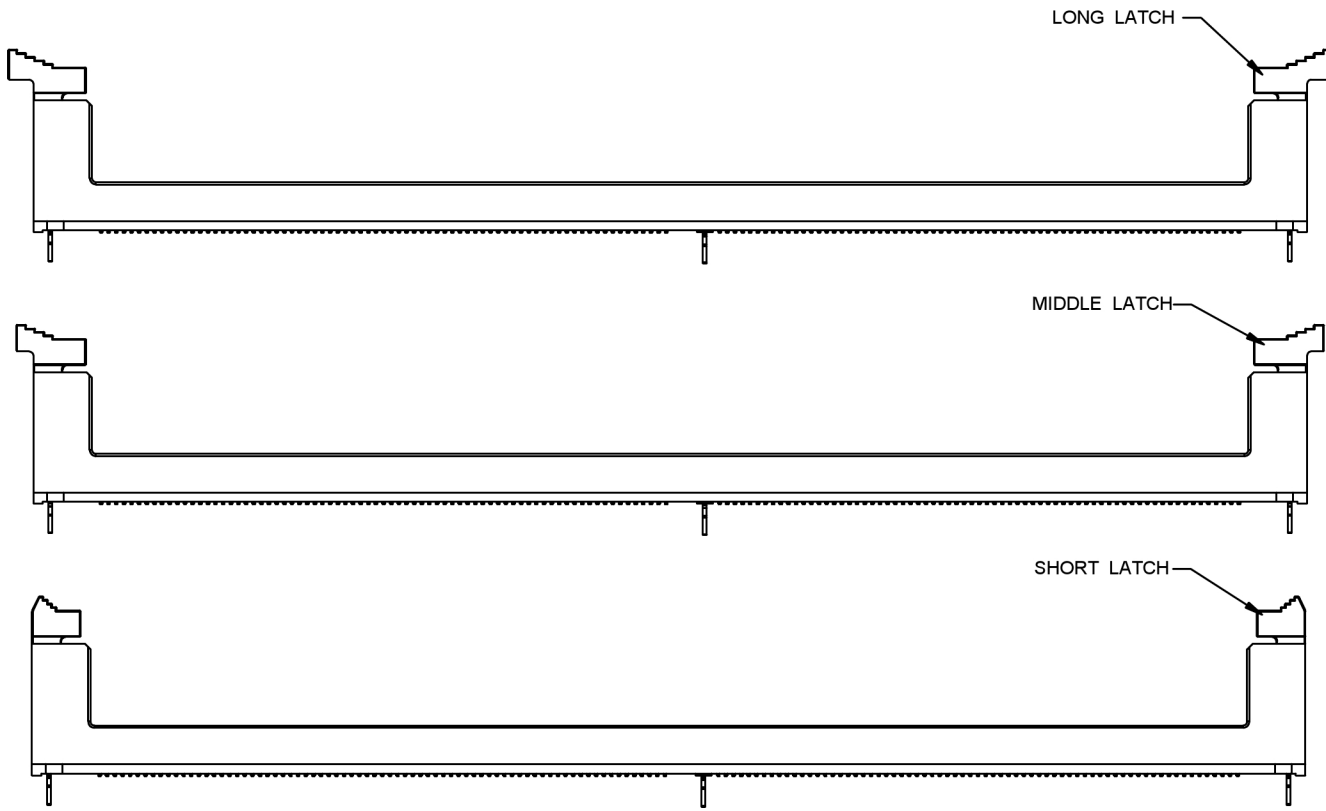

21.75	20.70	147.30	162.00	LONG
21.00	20.30	142.35	156.00	MIDDLE
20.50	20.20	140.80	152.00	SHORT
DIM.D	DIM.C	DIM.B±0.30	DIM.A	LATCH TYPE

X9413 W V S - 288 X X X -9T V15
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- 1.Series Nunber
- 2.Terminal form: W-Wafer
- 3.Welding Board Angle : V-Sright Angle 180°
- 4.Welding Way:S-SMT
- 5.No.of Pins: XX-288 Pin
- 6.Board Lock Type: B-Board Locks Type;T-TAB type
- 7.Latch Type: 1.short latch;2.long latch;3.middle Latch
- 8.Special No:M-With Mylar ; Blank-without Mylar
- 9.latchPlastic material: PA46 /PA9T UL94V-0
- 10.Contact Plating:V01-Gold Flash
V15-Gold 15u"
V30-Gold 30u"

NOTES 注释:

1. MATERIAL材料:

- 1.1 HOUSING外壳: HIGH PERFROMANCE RESINS, GLASS FILBER,UL94V-0;COLOR:SEE PART NO.
- 1.2 LATCH锁: HIGH PERFROMANCE RESINS, GLASS FILBER, UL94 V-O, COLOR: SEE PART NO.
- 1.3 CONTACTS触点: COPPER ALLOY.
- 1.4 BOARDLOCK针脚: STAINLESS STEEL.
- 1.5 TABS标签: STAINLESS STEEL.

2. FINISH饰面:

2.1 CONTACT触点:

- [SEE PART NO..] GOLD PLATING ON THE CONTACT AREA.
- 2.54um [100u"] MIN. MATTE-TIN PLATING ON THE SOLDERING AREA
- 1.27um [50u"] MIN. NICKEL UNDERPLATING OVERALL.

广东星坤科技股份有限公司	
Δ年	日期
Δ月	
Δ日	
Δ数	
MARK	文件工程章
DESCRIPTION	REVISIONS
DATE	REVISED
APPROVED	UNSPECIFIED TOLERANCES
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn	

					ANGLAR	±5°
					L≤ 4	±0.2
					4<L≤ 16	±0.3
					16<L≤ 63	±0.4
					L> 63	±0.5
					UNSPECIFIED TOLERANCES	



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW: ④ ⑤	PART NO.: X9413WVS-288XX-9TV15
CHKD		UNIT: mm/in	DWG NO.: X-X9413WVS-288XX-9TV15
APPD		SIZE: A4	WEIGHT SHEET REVISION 1/1 A0
XKB INDUSTRIAL PRECISION CO.,LIMITED			