





THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



* UNLESS OTHERWISE SPECIFIED TOLERANCES
ON DECIMAL IS: ANGLE $\pm 5^\circ$
UNIT: MM X. ± 0.38
X.X ± 0.25

BACKSHELL KIT INCLUDES:

- (2) BACKSHELL HALVES
- (2) HOUSING SCREWS
- (1) SET OF COMPRESSION INSERTS-VARIOUS SIZES
DIAMETERS 4mm(.157"), 5mm(.167"), 7mm(.276"), 9mm(.354")

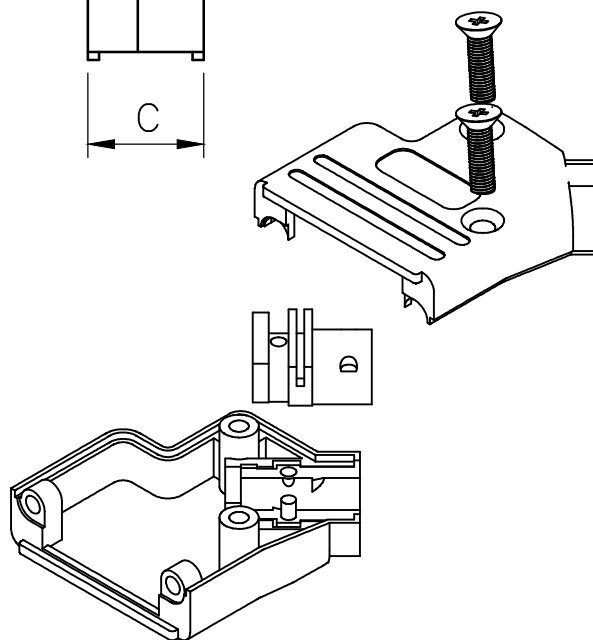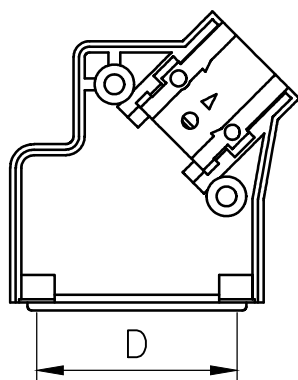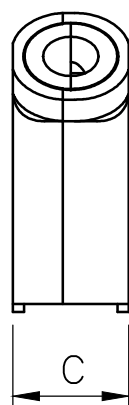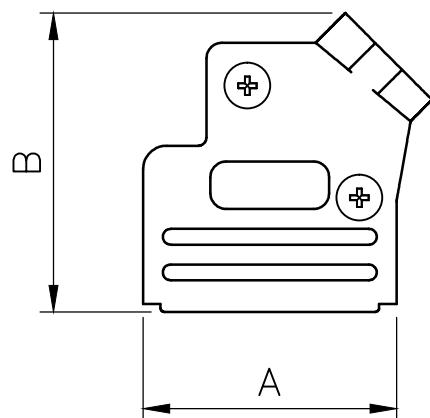

DIMENSIONS(mm/in)

SIZE	A ± 1.50 ± 0.06	B ± 1.20 ± 0.047	C ± 0.60 ± 0.024	D ± 0.25 ± 0.01
9	31.00 1.220	36.30 1.429	14.50 0.571	24.99 0.984
15	39.50 1.555	40.30 1.587	14.50 0.571	33.32 1.312
25	53.20 2.094	40.30 1.587	14.50 0.571	47.04 1.852
37	69.70 2.744	40.30 1.587	14.50 0.571	63.50 2.500

ORDERING INFORMATION:

SIZE	P/N - KITTED	PRODUCT CODE
9-WAY	6560-0206-31	MHDVSL9-K
15-WAY	6560-0206-32	MHDVSL15-K
25-WAY	6560-0206-33	MHDVSL25-K
37-WAY	6560-0206-34	MHDVSL37-K

BACKSHELL MATERIAL:
PLATING:
M3 HOODSCREWS:
COMPRESSION INSERT:
OPERATING TEMP:

DIE-CAST ZINC ALLOY
NICKEL PLATED 2um min
STEEL: ZN PLATED
ABS, UL RECOGNIZED
-40°C TO +120°C

THESE DRAWINGS AND SPECIFICATIONS ARE THE
PROPERTY OF MH CONNECTORS AND SHALL NOT BE
REPRODUCED, COPIED OR USED AS THE BASIS FOR
THE MANUFACTURE OR SALE OF APPARATUS WITHOUT
WRITTEN PERMISSION.

DRAWN
Johnny
DATE
05-15-15

APPROVED
DAMIEN
DATE
05-15-15

SCALE
1 : 1
SHEET OF
1 OF 1
REV:
2.0

DRAWING No
MHDVSL-SERIES



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY.



MH CONNECTORS,
DIVISION OF EDAC