




REV.	ECN NO.	DATE
J	BN14082002	2014/08/20
K	BN14100601	2014/10/06



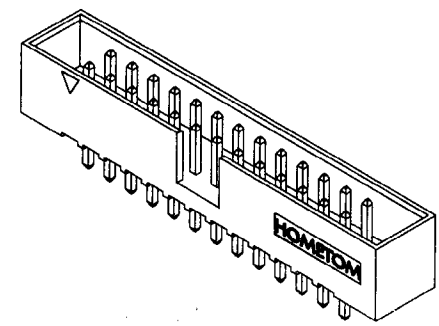


NOTES:
1.CURRENT RATING:1.0A AMP
2.VOLTAGE RATING: 250V DC/AC
3.CONTACT RESISTANCE: 20mΩ MAX
4.INSULATION RESISTANCE:1000MΩ MIN
5. WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
6.TEMPERATURE:-45°C ~ +105°C
MATERIAL:
1.HOUSING: THERMOPLASTIC,HIGH TEMP, UL94V-0,
2.TERMINAL: BRASS(C2700)
PLATING:SEE ORDERING INFORMATION

深圳市紘通电子有限公司
2014.10.09
文管中心发行章

ORDERING INFORMATION

BH**NQ-****0**
PIN NO: 02PIN~80PIN
MATERIAL/COLOR:
8B=PA46+30%G.F/BLACK
7B=PA6T+30%G.F/BLACK
TAKE OUT PIN
SEE TABLE 1.
DIP:
F=2.20MM
I=2.50MM
N=3.00MM
PLATING:
A=1u" AU PLATED OVER
50u" NICKEL UNDER PLATED
D=10u" Au PLATED OVER
50u" NICKEL UNDER PLATED
E=15u" Au PLATED OVER
50u" NICKEL UNDER PLATED
Y=120u" TIN PLATED OVER
50u" NICKEL UNDER PLATED

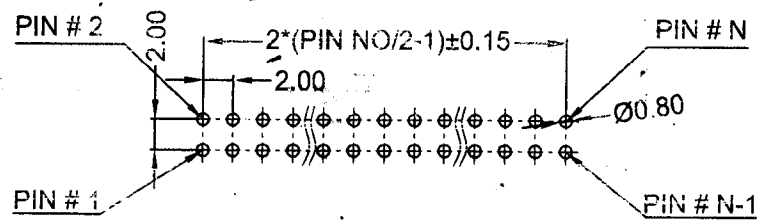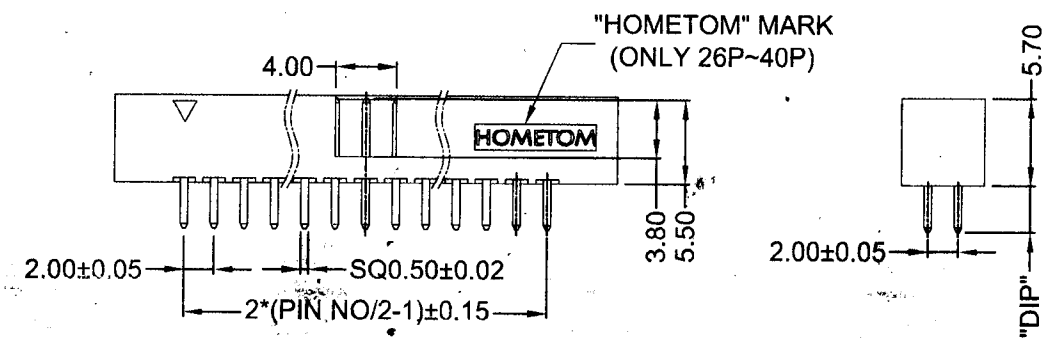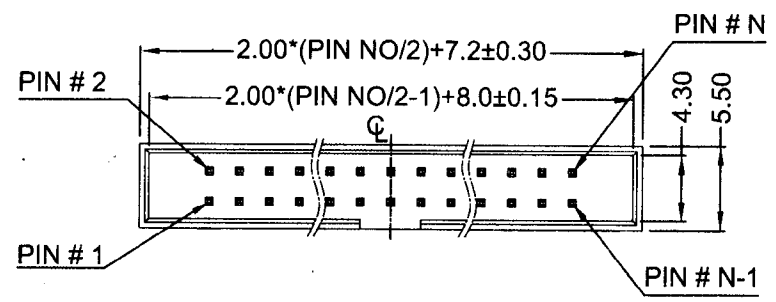

P.C.B. LAYOUT(TOP VIEW)
TOLERANCE:±0.05

THE RESTRICTION OF ENVIRONMENTAL MANAGEMENT SUBSTANCES IS BASED ON THE NEW VERSION OF HTQ-S-3Q-83					
TITLE: 2.00MM PITCH BOX HEADER 180° DIP		HOMETOM www.hometom.com.tw HORNG TONG ENTERPRISE CO.,LTD.			
TOLERANCE		APPROVAL:	UNIT:	PART NO:	
LINEAR: X ±0.30 .X ±0.25 .XX ±0.20	ANGLE: X° ±2° .X° ±1° .XX° ±0.5°	ONECIG	mm	BH**NQ-****0**	
CUSTOMER DRAWING	REV: K	DRAWN:	SIZE: A4	DWG.NO: CBH016-00	SHEET: 1 / 3




TABLE: 1.

REV.	ECN NO.	DATE
J	BN14082002	2014/08/20
K	BN14100601	2014/10/06

CODE	TAKE OUT PIN
00	STANDARD PRODUCT
01	1 PIN IS REMOVED
02	2 PIN IS REMOVED
03	3 PIN IS REMOVED
04	4 PIN IS REMOVED
05	5 PIN IS REMOVED
06	6 PIN IS REMOVED
07	7 PIN IS REMOVED
08	8 PIN IS REMOVED
09	9 PIN IS REMOVED
10	10 PIN IS REMOVED
11	11 PIN IS REMOVED
12	12 PIN IS REMOVED
13	13 PIN IS REMOVED
14	20 PIN IS REMOVED
15	25 PIN IS REMOVED
16	3,4 PINS ARE REMOVED
17	3,5 PINS ARE REMOVED
18	4,5 PINS ARE REMOVED
19	4,6 PINS ARE REMOVED
20	4,5,6 PINS ARE REMOVED
21	8,16 PINS ARE REMOVED
22	4,10 PINS ARE REMOVED
23	21 PIN IS REMOVED
24	1,7 PINS ARE REMOVED
25	14 PIN IS REMOVED
26	8,11,12,16 PINS ARE REMOVED
27	3,10 PINS ARE REMOVED
28	2,15,16 PINS ARE REMOVED
29	9,10 PINS ARE REMOVED
30	26 PIN IS REMOVED


CODE	TAKE OUT PIN
31	13,16 PINS ARE REMOVED
32	3,4,7,8,11,12 PINS ARE REMOVED
33	15 PIN IS REMOVED
34	16 PIN IS REMOVED
35	4,6,10 PINS ARE REMOVED
36	3,25,26 PINS ARE REMOVED
37	7,8,9 PINS ARE REMOVED
38	3,4,7 PINS ARE REMOVED
39	33 PIN IS REMOVED
40	31 PIN IS REMOVED
41	3,20 PINS ARE REMOVED
42	13,14,16 PINS ARE REMOVED
43	10,15 PINS ARE REMOVED
44	3,9 PINS ARE REMOVED
45	5,6 PINS ARE REMOVED
46	9,16 PINS ARE REMOVED
47	8,18 PINS ARE REMOVED
48	21,22 PINS ARE REMOVED
49	8,25 PINS ARE REMOVED
50	4,5,14,17,24 PINS ARE REMOVED
51	2,10,15,16 PINS ARE REMOVED
52	15,16 PINS ARE REMOVED
53	10,14 PINS ARE REMOVED
54	10,11,13,14 PINS ARE REMOVED
55	1,9,10 PINS ARE REMOVED
56	4,9 PINS ARE REMOVED
57	4,7 PINS ARE REMOVED
58	1,9 PINS ARE REMOVED
59	3,8 PINS ARE REMOVED
60	3,8,11 PINS ARE REMOVED
61	2,8 PINS ARE REMOVED

CODE	TAKE OUT PIN
62	1,2,12 PINS ARE REMOVED
63	3,4,5,6 PINS ARE REMOVED
64	8,9 PINS ARE REMOVED
65	19 PIN IS REMOVED
66	1,2 PINS ARE REMOVED
67	23,24 PINS ARE REMOVED
68	27 PIN IS REMOVED
69	3,18 PINS ARE REMOVED
70	15,24,32 PINS ARE REMOVED
71	1,40 PINS ARE REMOVED
72	29 PIN IS REMOVED
73	3,6 PINS ARE REMOVED
74	30 PIN IS REMOVED
75	2,4,6,8 PINS ARE REMOVED
76	5,6,26 PINS ARE REMOVED
77	42 PIN IS REMOVED
78	2,4 PINS ARE REMOVED
79	40 PIN IS REMOVED
80	7,24 PINS ARE REMOVED
82	18 PIN IS REMOVED
83	4,8 PINS ARE REMOVED


深圳市紘通电子有限公司
2014.10.09
文管中心发行章

THE RESTRICTION OF ENVIRONMENTAL MANAGEMENT SUBSTANCES IS
BASED ON THE NEW VERSION OF HTQ-S-3Q-83






TITLE: 2.00MM PITCH BOX HEADER 180° DIP		HOMETOM www.hometom.com.tw HONG TONG ENTERPRISE CO.,LTD.	
TOLERANCE		APPROVAL: <i>[Signature]</i>	UNIT: mm
LINEAR: X ±0.30 .X ±0.25 .XX ±0.20	ANGLE: X° ±2° .X° ±1° .XX° ±0.5°	CHECK: <i>[Signature]</i>	SIZE: A4
CUSTOMER DRAWING	REV: K	DRAWN: <i>[Signature]</i>	SCALE: 1:1
		PRJ.: <i>[Signature]</i>	SHEET: 2 / 3



REV.	ECN NO.	DATE
J	BN14082002	2014/08/20
K	BN14100601	2014/10/06

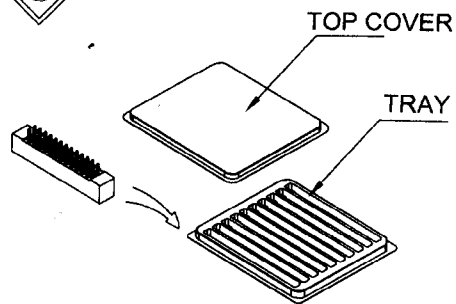

深圳市統通电子有限公司
2014.10.09
文管中心发行章

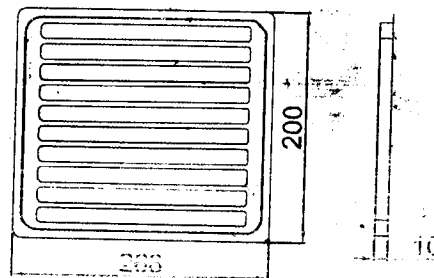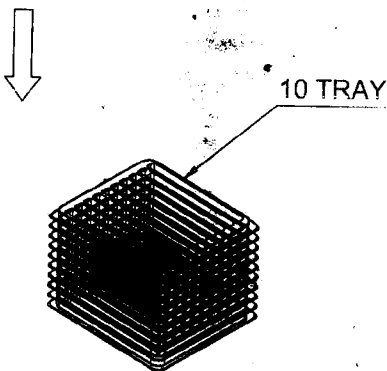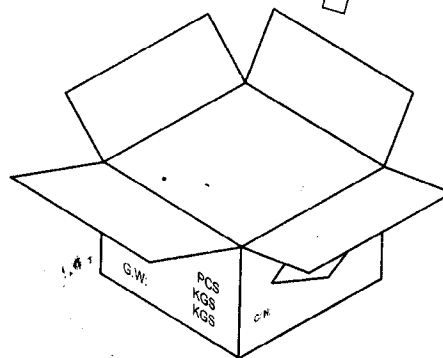

POLES	QUANTITY			POLES	QUANTITY		
	PCS/TRAY	TRAY/CARTON	PCS/CARTON		PCS/TRAY	TRAY/CARTON	PCS/CARTON
02	500	10	5000	42	80	10	800
04	400	10	4000	44	80	10	800
06	340	10	3400	46	80	10	800
08	300	10	3000	48	80	10	800
10	260	10	2600	50	80	10	800
12	220	10	2200	52	60	10	600
14	200	10	2000	54	60	10	600
16	180	10	1800	56	60	10	600
18	160	10	1600	58	60	10	600
20	160	10	1600	60	60	10	600
22	140	10	1400	62	60	10	600
24	140	10	1400	64	60	10	600
26	120	10	1200	66	60	10	600
28	120	10	1200	68	60	10	600
30	120	10	1200	70	40	10	400
32	100	10	1000	72	40	10	400
34	100	10	1000	74	40	10	400
36	100	10	1000	76	40	10	400
38	100	10	1000	78	40	10	400
40	80	10	800	80	40	10	400

THE RESTRICTION OF ENVIRONMENTAL MANAGEMENT SUBSTANCES IS
BASED ON THE NEW VERSION OF HTQ-S-3Q-83

TITLE: 2.00MM PITCH BOX HEADER 180° DIP		HOMETOM www.hometom.com.tw HONG TONG ENTERPRISE CO.,LTD.	
TOLERANCE	APPROVAL:	UNIT:	PART NO:
LINEAR: X: ± 0.30 .X: ± 0.25 .XX: ± 0.20	ANGLE: X: $\pm 2^\circ$.X: $\pm 1^\circ$.XX: $\pm 0.5^\circ$	mm	BI***NQ-****0**
CUSTOMER DRAWING	REV: K	CHECK:	DWG.NO: CBH016-00
		DRAWN:	SCALE: 1:5
		PRJ.:	SHEET: 3 / 3





深圳紘通电子有限公司

工程变更口申请 ■通知单

申请单位: 深圳研发

主题: 图面发行

优先级别: ☐特急 ☐急 ☒一般

变更说明: CBH016-00, 增加镀金 10u"料号选项改版发行		文件编号: BN14100601	
		申请日期: 2014/10/06	
产品名称: 2.00MM PITCH BOX HEADER 180° DIP 宏通料号: BF**NQ-****0** 变更原因: ☐ 文书修正 ☐ 设计变更 ☐ 客户要求 ☐ 采购需求 ☐ 制造需求 ☐ 其它 变更类型: ☒ 图面变更 (J→K) ☐ 制程改善 ☐ 模具变更 ☐ 其它			
变更前: PLATING: A=1u" AU PLATED OVER 50u" NICKEL UNDER PLATED E=15u" Au PLATED OVER 50u" NICKEL UNDER PLATED Y=120u" TIN PLATED OVER 50u" NICKEL UNDER PLATED		变更后: PLATING: A=1u" AU PLATED OVER 50u" NICKEL UNDER PLATED D=10u" Au PLATED OVER 50u" NICKEL UNDER PLATED E=15u" Au PLATED OVER 50u" NICKEL UNDER PLATED Y=120u" TIN PLATED OVER 50u" NICKEL UNDER PLATED	
核准: 		审核:  申请人: 	
☒ 无须会签: (仅限于变更作业无影响物料、生产作业状况下) ☐ 会签意见: (如下相关单位会签确认)			
会签	相关单位	会签	相关单位
	研发: ☐ 同意 ☐ 不同意、意见:		业务: ☐ 同意 ☐ 不同意、意见:
	制造: ☐ 同意 ☐ 不同意、意见:	品保	品质部: ☐ 同意 ☐ 不同意、意见:
			GA部: ☐ 同意 ☐ 不同意、意见:
	生管: ☐ 同意 ☐ 不同意、意见:		注塑: ☐ 同意 ☐ 不同意、意见:
	冲压: ☐ 同意 ☐ 不同意、意见:		采购: ☐ 同意 ☐ 不同意、意见:
	仓库: ☐ 同意 ☐ 不同意、意见:		其它: ☐ 同意 ☐ 不同意、意见:
结 论	新旧品处理: ☐ 旧品用毕后切入新品, 预定切入日期: /年 /月 /日 ☐ 旧品报废 ☐ 重工 (口单件再制品&成品 口半成品 口成品) ☐ 限用: ☐ 其它: ☐ 说明: 模治具处理: 是否修模 ☐ 是 ☐ 否 移模时间: 修模时间: 系统处理: ☐ 修改BOM ☐ 其它		
	裁核: ☒ 同意 ☐ 不同意 意见:  签核:		
	☐ 需客户确认 / ☐ 不需客户确认 客户回签: 业务会签:		
	☐ 需供应商确认 / ☐ 不需供应商确认 供应商回签: 工程会签:		

